

SHININGGRIMS

Advanced Tech & Quality

OUR STORY

SHINING CYCLE, Taiwan manufacturer of Bicycle rims, Motorcycle rims and Bike components established in 1972. With more than 40 years of experience, SHINING Cycle has become one of the biggest rim manufacturer in Taiwan and more 500 staff at the three principal sites in Taiwan, Vietnam and China, which provide more than 10 million pairs of rims for the world bicycle riders per year. SHINING CYCLE always uses advanced technology and equipments to keep products ahead of the market and could perform its best to those bicycle lovers.

As we design rims, we build rims, we test rims, we ride on our rims, then we love our rims, thus we know what riders need and even more. We, at SHINING CYCLE, are aiming to bring joy and create excitement to the world cyclists. When you are riding on SHINING rims, the wind touches the skin, you will experience the power of SHINING rims and enjoy the nature environment around you.

So, Make your rims SHINING today!



ROAD RACING

A-600	1
A-500	1
A-360	2
A-350	2
A-340	2
A-330	1
A-310	1
AP-410 NEW	1
A-T300	2
A-280	2
A-260	2
A-240	3
A-220	3
RA-300 NEW	3
RA-600	4
RC-200	3
RR-600	3
RR-300	3
A-M8	4

DOWNHILL

DB-X50	4
DB-Z50	4
DB-X45	4
DB-X40	5
DB-X38	5
DB-X30	5
DB-X21 NEW	6
DB-64	6
DB-50	6
DB-45	5
DB-42	5
DB-35	5
DB-32	6
DB-31	6
DB-30	6
DB-28	7

DB-T280	7
DB-T25	7
DB-25	8
DB-24	8
DB-22	7
DB-221 NEW	7
DB-21	7
DB-19	8
DB-18	8

BMX & FREESTYLE

BX-40	8
BX-38	9
BX-36	9
BX-35	9
BX-34	10
BX-33	10
BX-32	10
BX-28	9
BX-26	9
BX-25	9
BX-24	10
BX-20	10
BX-16	10
BX-15	11
BX-14	11

FAT BIKE

SB-100	13
SB-90	13
SB-80	13
SB-60	13
MP-80	13

ATB/MTB/TREKKING

AS-T35	14
AS-T30	14
A-X240 NEW	14
AS-35P	14
AS-30P	14
A-325D NEW	15
A-320	15
A-300	15
A-S262 NEW	16
A-262	16
A-250	16
AS-210-S	15
AS-210-P	15
AS-23	15
AS-19	16
A-M7	16
A-M6	16
A-M5	17
A-M4	17
A-M3	17
A-M1	18
MT-96	18
MT-86	18
MT-66	17
MT-46	17
MT-26	17
MT-25	18
MT-21 NEW	18
MT-20	18
MT-18	19
CT-46	19

SINGLE WALL

MP-50	19
MP-32	20
MP-22	20
A-7N	20
A-6N	19
A-5N	20
A-8V	20
A-7X	20
A-5X	21
A-35X NEW	21
LP-60	21
LP-50	21
LP-40	21

STEEL RIM

7A	22
7X	22

SPOKES and NIPPLES

SPOKES	22
NIPPLES	22

MOTORCYCLE RIM

Steel Rim	23
YL	23
TL NEW	23
WM	24
H	24
MT	24

www.shining-cycle.com

E-Mail: slcycle@shining-cycle.com

台灣 | Taiwan Factory

享 勵 工 業 股 份 有 限 公 司
SHEANG LIH CYCLE INDUSTRY CO., LTD.

台南市永康區王行里環工路7號 Postal Code:71041
No.7, Hwan Gong Road, Yung Kang Dist., Tainan City, Taiwan
Tel:+886-6-2042077-8 Fax:+886-6-2337514

越南 | Vietnam Factory

享 勵 企 業 責 任 有 限 公 司
SHEANG LIH CYCLE (VIETNAM) ENT. LTD.

平陽省逸安縣神浪II 工業區 N區 DT743路21號
No.21, Road DT743, Lot N, Song Than Industrial Zone II
Tan Dong Hiep Commune, Di An District, Binh Duong Province,
Vietnam Postal Code:824843
Tel:+84-274-3730188 Fax:+84-274-3730218

中國 | China Factory

常 州 帛 鈺 金 屬 制 品 有 限 公 司
BO YU METAL PRODUCTS CO., LTD.

江蘇省常州市新北區新苑三路158號
No.158,Xinyuansan Road, Xinbei District, Changzhou City,
Jiangsu Province,China Postal Code:213031
Tel:+86-519-68586787-8 Fax:+86-519-68586779

SHININGRIMS

Advanced Tech & Quality

BICYCLE RIM & MOTORCYCLE RIM

Product Specification Guide

www.shining-cycle.com


THE PROFESSIONAL MANUFACTURER OF RIM

2018+



ROAD RACING

ROAD RACING

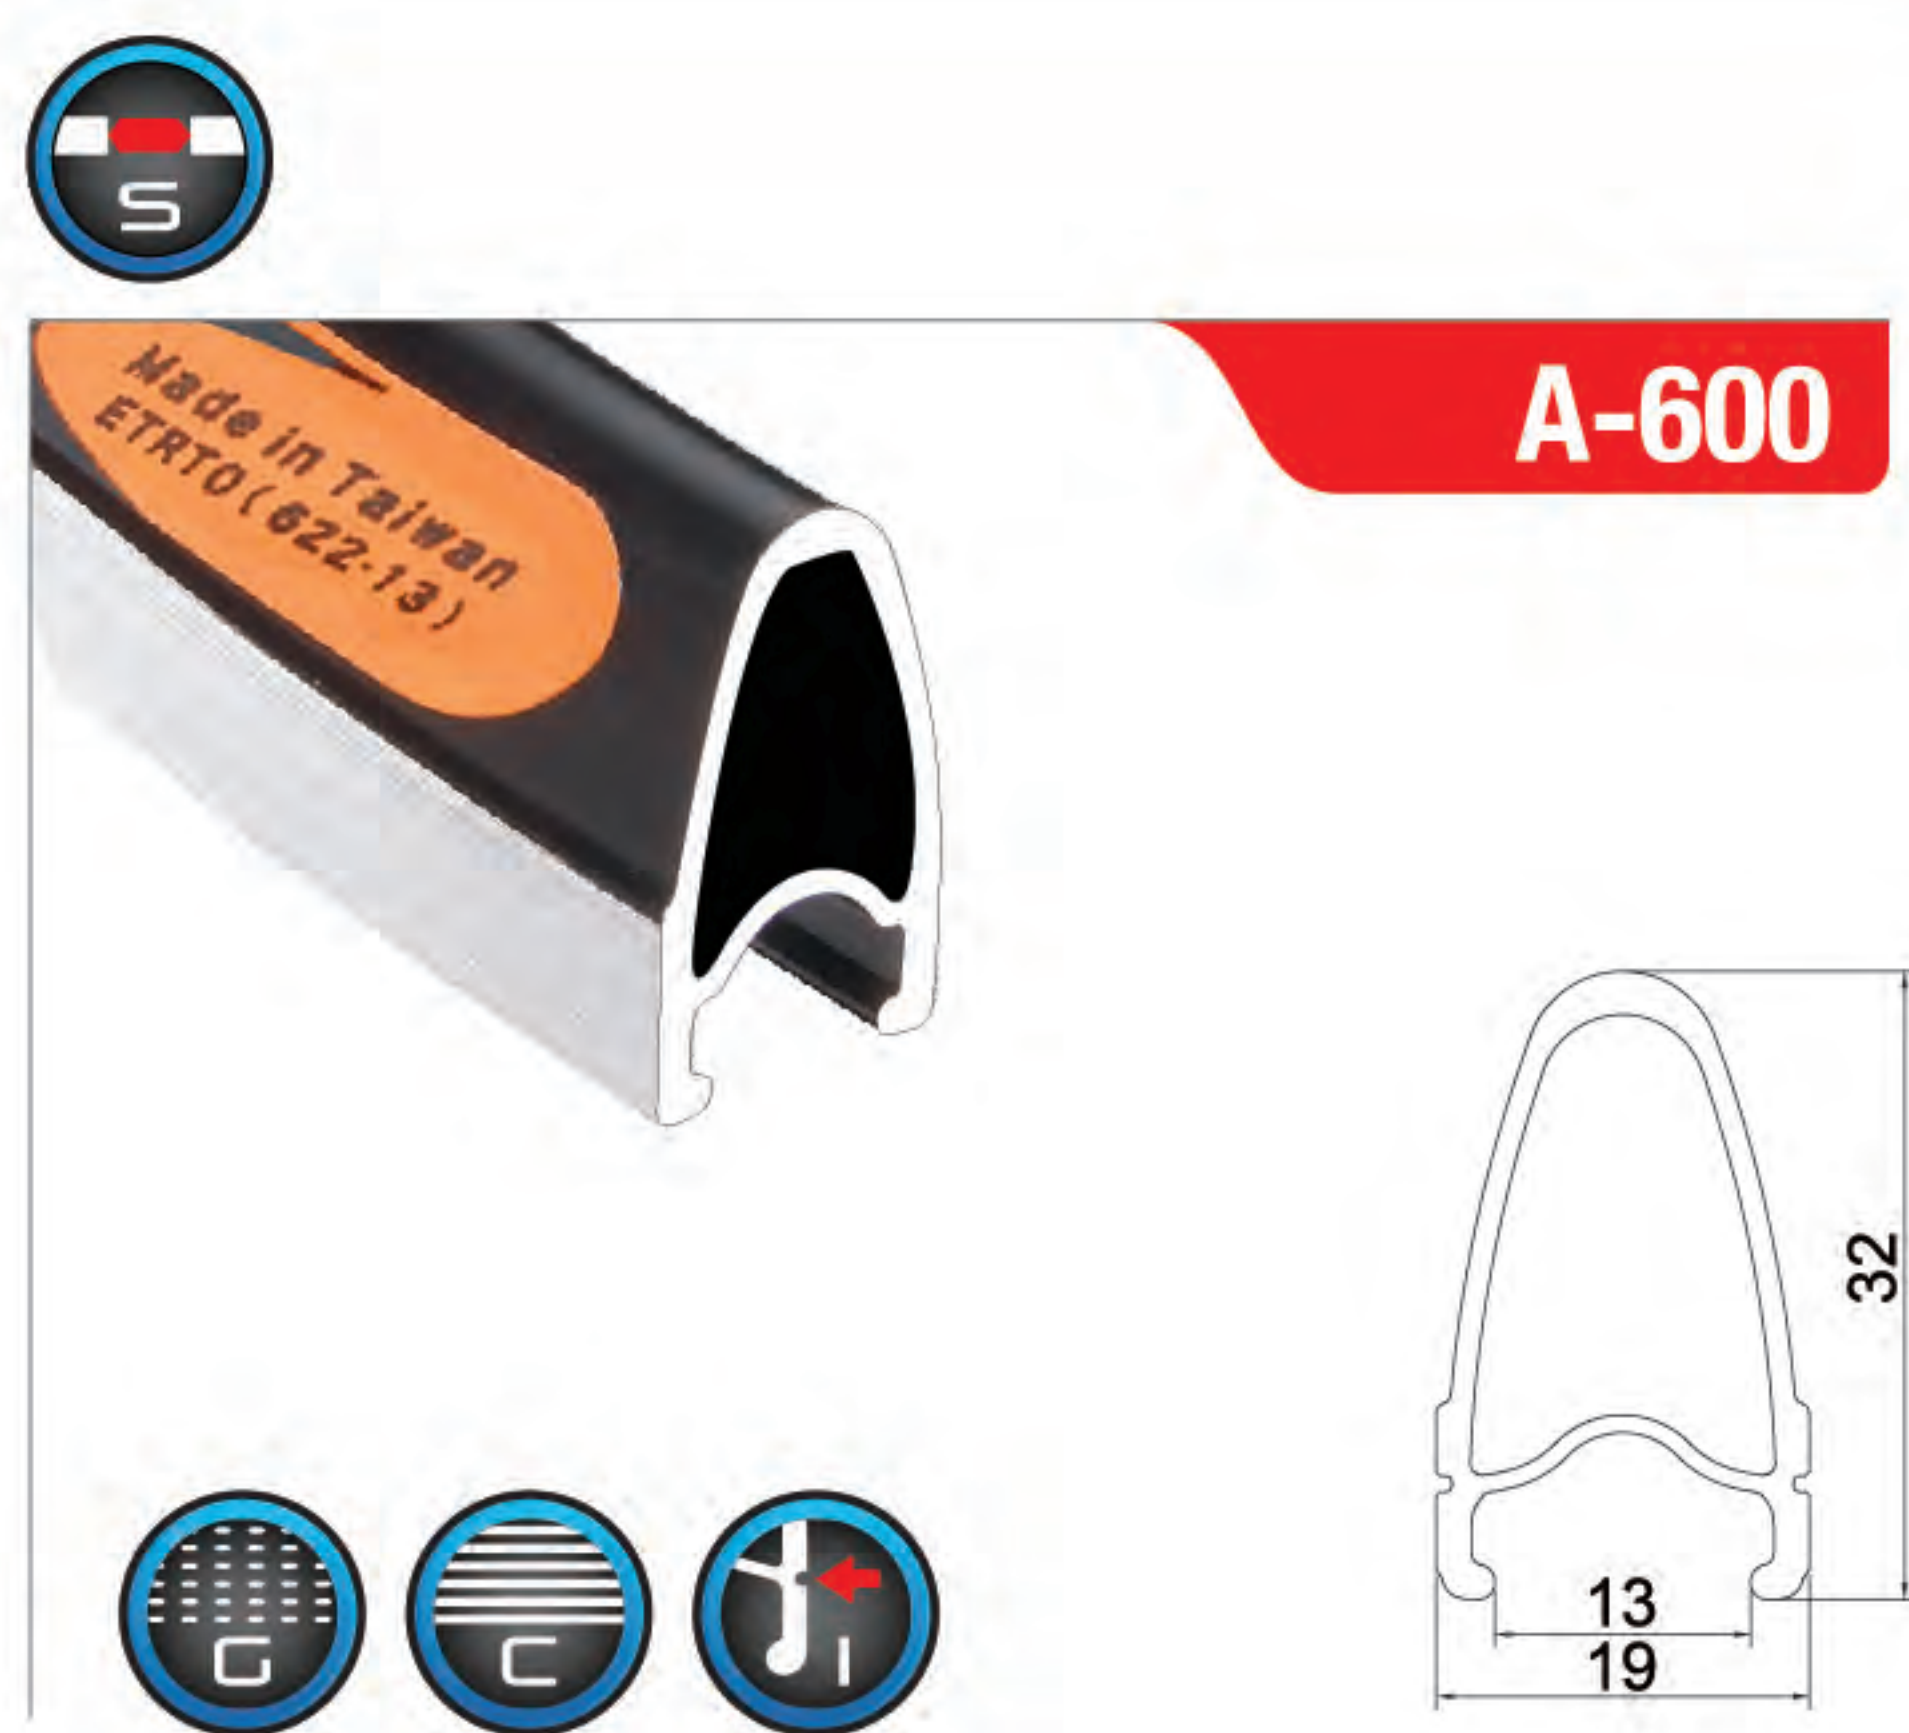

Size	Weight(g)	ERD(mm)
700C(622-13)	665	574
650C(571-13)	615	524

Holes: 20H/24H/28H/32H/36H
Option: GSW/CSW
Joint: Sleeved



Size	Weight(g)	ERD(mm)
700C(622-14)	720	537
650C(571-14)	660	486

Holes: 20H/24H/28H/32H/36H
Option: GSW/CSW
Joint: Welded



Size	Weight(g)	ERD(mm)
700C(622-14)	527	584

Holes: 20H/24H/28H/32H/36H
Option: GSW/CSW
Joint: Sleeved



Size	Weight(g)	ERD(mm)
700C(622-12)	585	576
650C(571-12)	540	526
24"x1(520-12)	489	475
20"x1 1/8(451-12)	430	405
20"(406-12)	380	360

Holes: 18H/20H/24H/28H/32H/36H
Option: GSW/CSW
Joint: Pinned



Size	Weight(g)	ERD(mm)
700C(622-14)	677	555
650C(571-14)	629	504

Holes: 20H/24H/28H/32H/36H
Option: GSW/CSW
Joint: Welded



Size	Weight(g)	ERD(mm)
700C(622-14)	640	576
650C(571-14)	585	526
20"x1 1/8(451-14)	465	405
20"(406-14)	410	360

Holes: 20H/24H/28H/32H/36H
Option: Eyelets/GSW/CSW
Joint: Pinned



Size	Weight(g)	ERD(mm)
700C(622-13)	682	577

Holes: 20H/24H/28H/32H/36H
Option:
Joint: Pinned



Size	Weight(g)	ERD(mm)
700C(622-14)	810	555

Holes: 24H/28H/32H/36H
Option: GSW/CSW
Joint: Pinned




Size	Weight(g)	ERD(mm)
700C(622-17)	601	577

Holes: 28H/32H
Option:
Joint: Pinned



Size	Weight(g)	ERD(mm)
700C(622-15)	560	582

Holes: 20H/24H/28H/32H/36H
Option:
Joint: Pinned

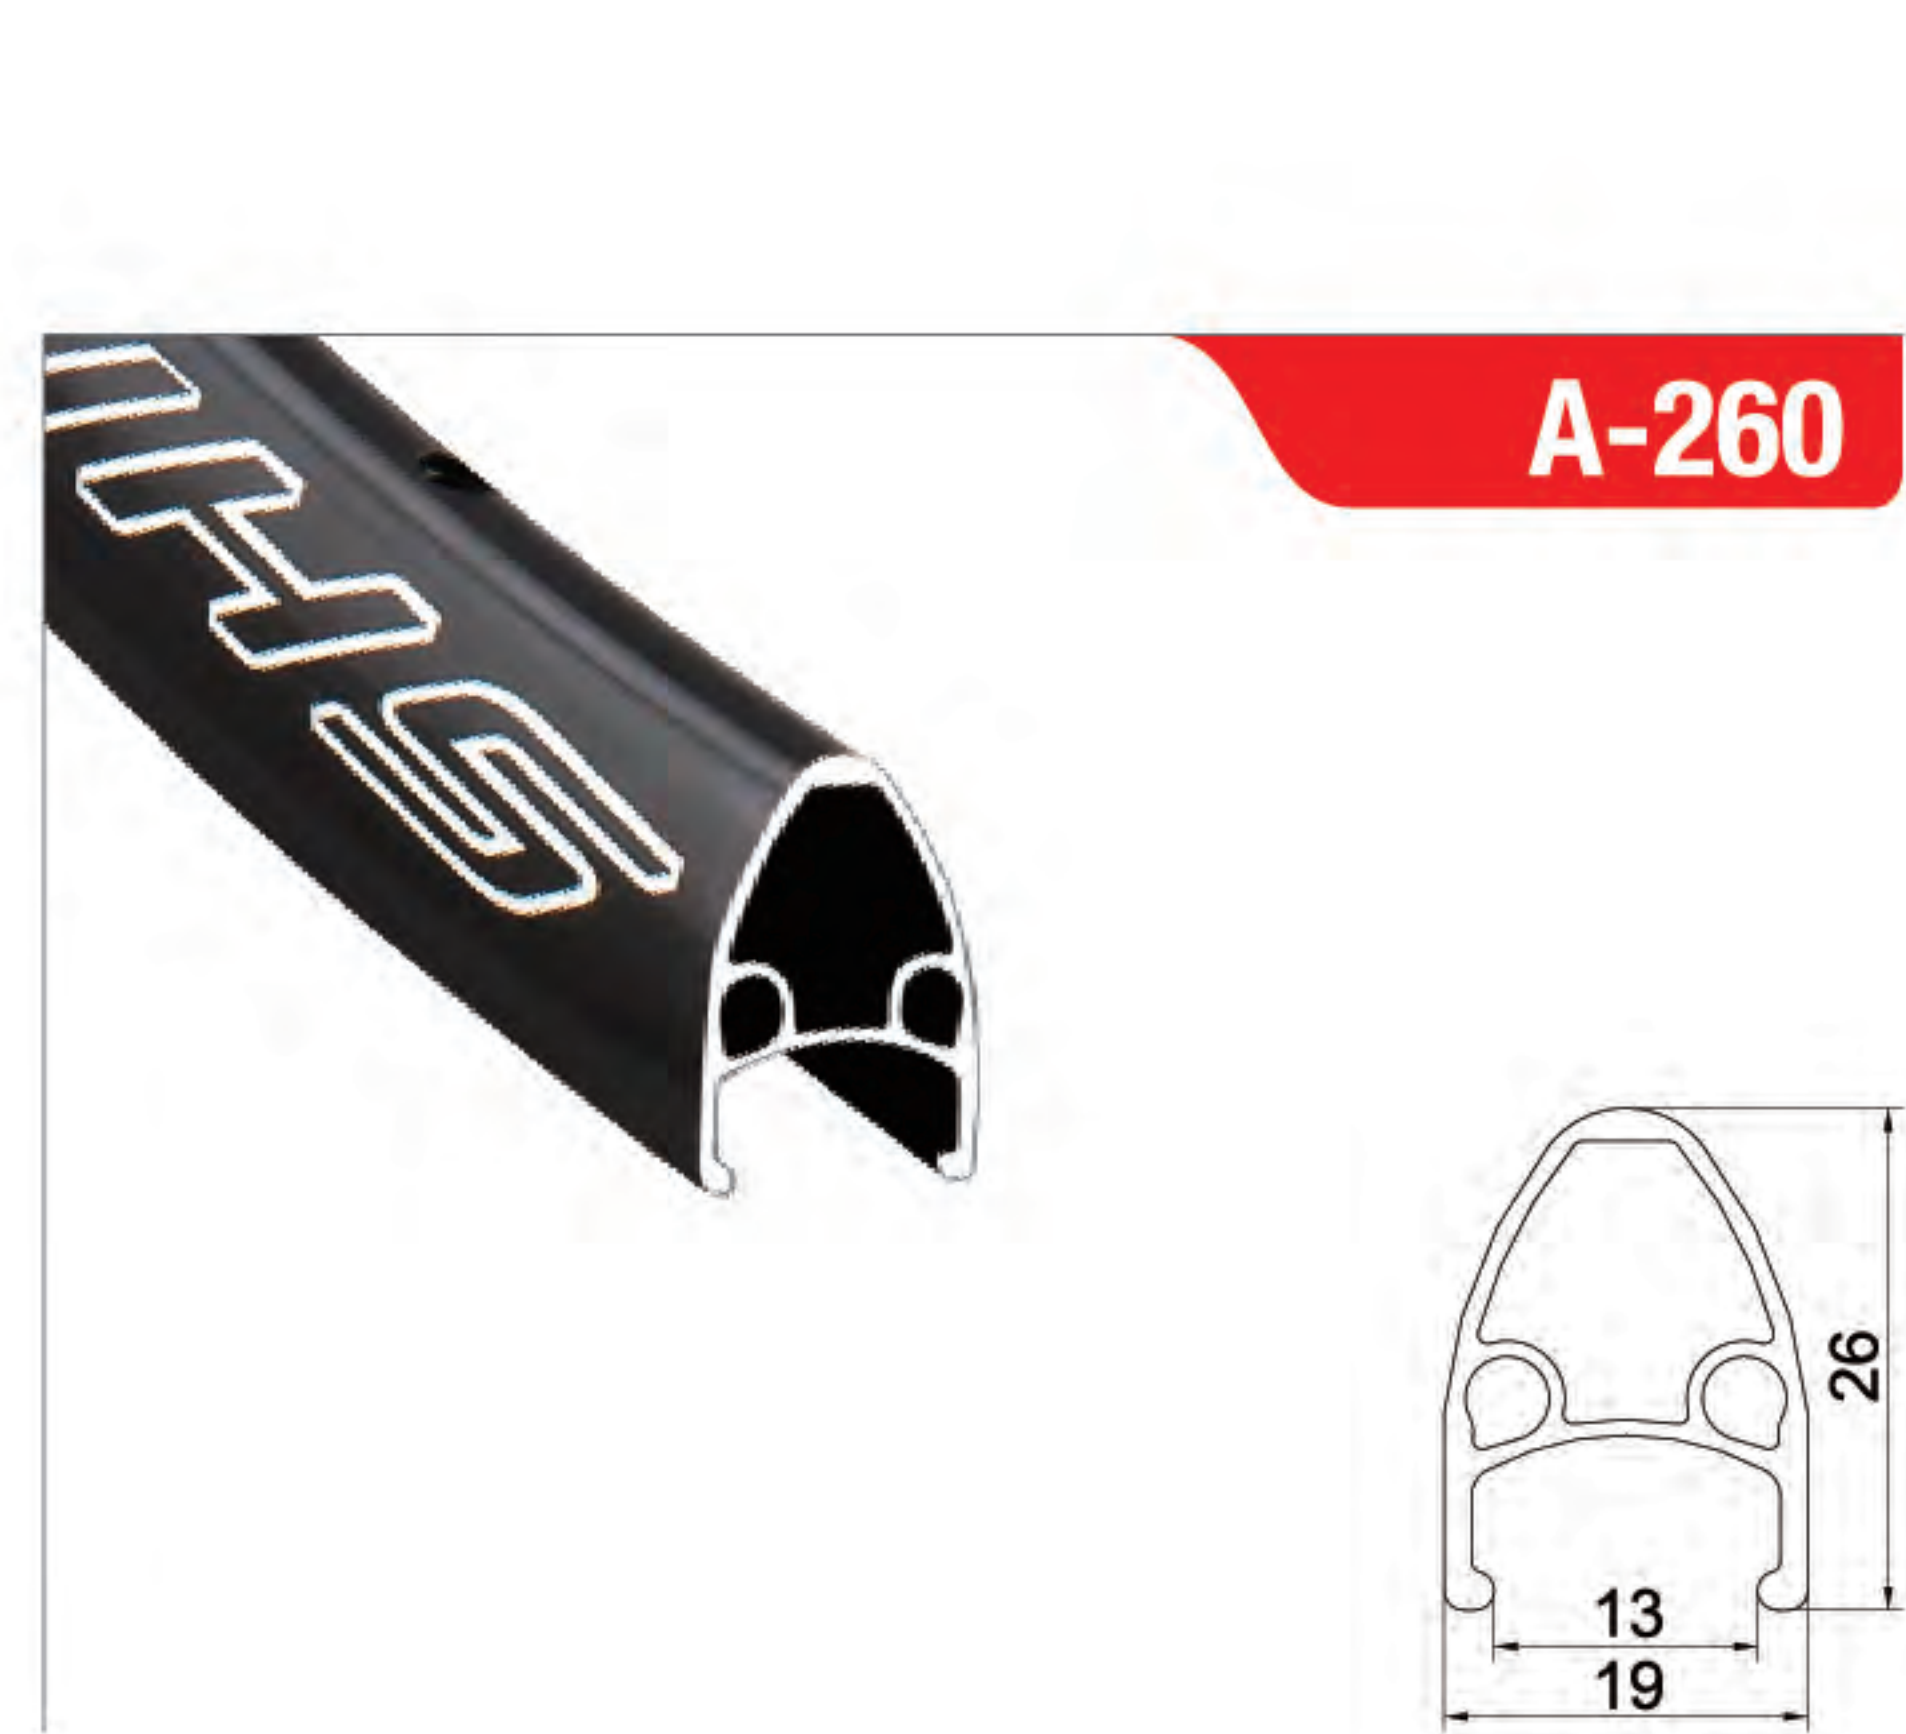

Size	Weight(g)	ERD(mm)
700C(622-13)	506	587

Holes: 20H/24H/28H/32H/36H
Option:
Joint: Pinned

ROAD RACING



Size	Weight(g)	ERD(mm)
700C(622-15)	530	591
26"(559-15)	475	528

Holes: 28H/32H/36H
Option: Eyelets
Joint: Pinned



Size	Weight(g)	ERD(mm)
700C(622-15)	508	595

Holes: 20H/24H/28H/32H/36H
Option: Eyelets/GSW/CSW
Joint: Pinned



Size	Weight(g)	ERD(mm)
700C(622-13)	396	599

Holes: 32H
Option: CSW
Joint: Sleeved

ROAD RACING



Size	Weight(g)	ERD(mm)
700C(622-14)	412	593
650C(571-14)	377	542
20"x1 1/8(451-14)	299	422
18"x1.0(400-14)	271	371

Holes: 20H/24H/28H/32H/36H
Option: Eyelets/GSW/CSW
Joint: Sleeved



Size	Weight(g)	ERD(mm)
700C(622-14)	520	600

Holes: 32H/36H
Option: Eyelets/GSW/CSW
Joint: Pinned



Size	Weight(g)	ERD(mm)
700C(622-14)	420	594
650C(571-14)	390	544

Holes: 20H/24H/28H/32H/36H
Option: Eyelets/GSW/CSW
Joint: Sleeved



Size	Weight(g)	ERD(mm)
700C(622-13)	400	596
650C(571-13)	374	546
20"x1 1/8(451-13)	291	425
18"(355-13)	235	333

Holes: 20H/24H/28H/32H/36H
Option: Eyelets/GSW/CSW
Joint: Sleeved

DOWNHILL



Size	Weight(g)	ERD(mm)
29"(622-45)	764	602
27.5"(584-45)	714	564
26"(559-45)	676	539

Holes: 32H/36H
Option: Pinned
Joint: Pinned



Size	Weight(g)	ERD(mm)
700C(622-14)	510	602
650C(571-14)	475	552
24"x1(520-14)	426	501
20"x1 1/8(451-14)	370	431

Holes: 20H/24H/28H/32H/36H
Option: Eyelets/GSW/CSW
Joint: Pinned



Size	Weight(g)	ERD(mm)
29"(622-45)	697	603
27.5"(584-45)	652	565
26"(559-45)	620	540

Holes: 32H/36H
Option: Eyelets
Joint: Pinned




Size	Weight(g)	ERD(mm)
29"(622-40)	611	606
27.5"(584-40)	570	568
26"(559-40)	540	543

Holes: 32H/36H
Option: Pinned
Joint: Pinned



DB-X40

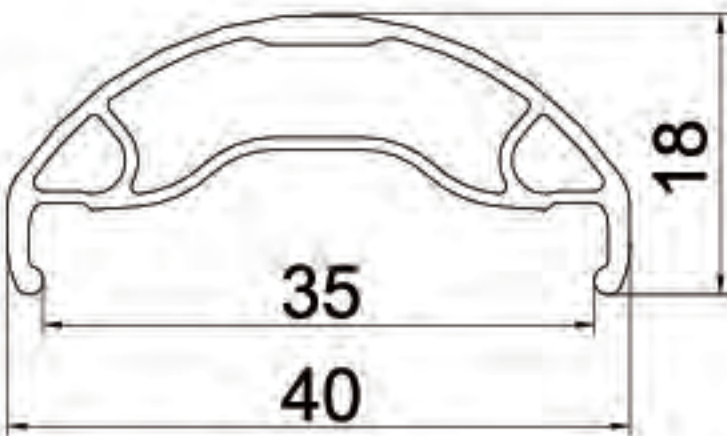


Size	Weight(g)	ERD(mm)
29"(622-35)	607	601
27.5"(584-35)	556	563
26"(559-35)	543	538

Holes: 32H/36H
Option:
Joint: Pinned



DB-X38

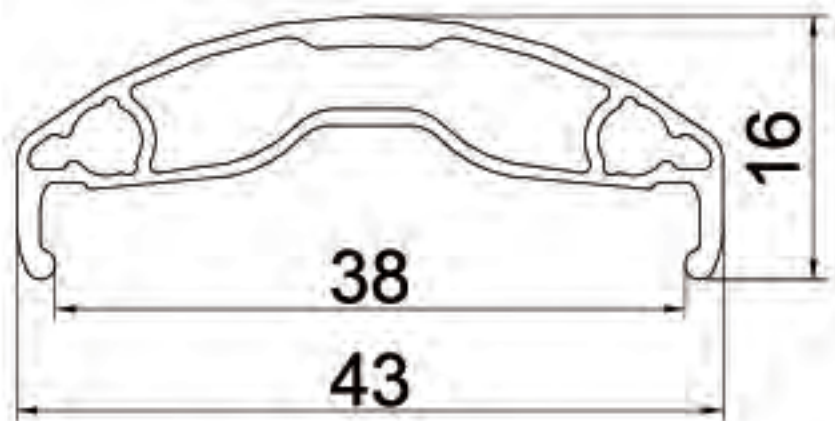


Size	Weight(g)	ERD(mm)
29"(622-38)	602	606
27.5"(584-38)	566	568
26"(559-38)	541	543

Holes: 32H/36H
Option:
Joint: Pinned



DB-X30

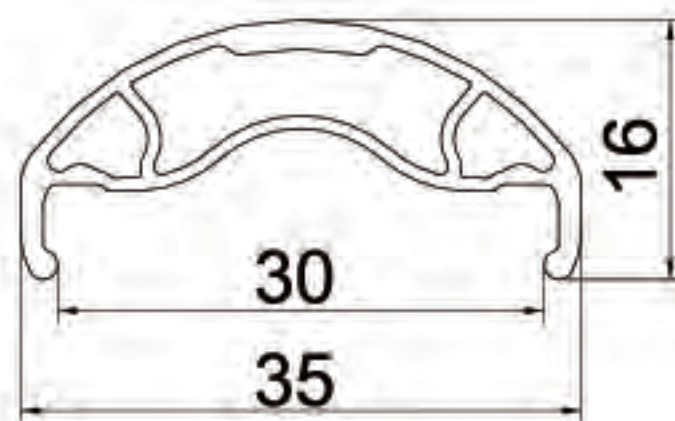


Size	Weight(g)	ERD(mm)
29"(622-30)	520	605
27.5"(584-30)	498	567
24"(507-30)	439	490
20"(406-30)	353	389

Holes: 32H
Option:
Joint: Pinned




DB-X21

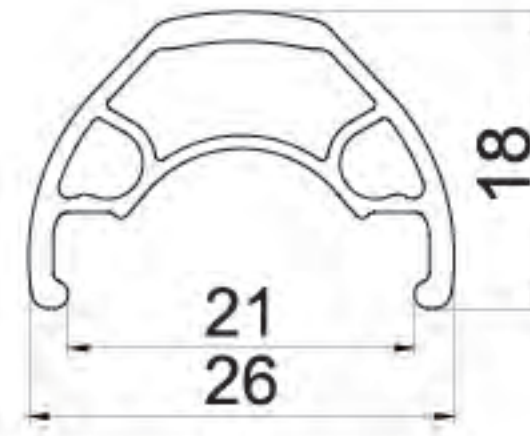

Size	Weight(g)	ERD(mm)
29"(622-21)	495	601
27.5"(584-21)	470	563
26"(559-21)	446	538

Holes: 28H/32H/36H
Option: Eyelets
Joint: Pinned


DB-64

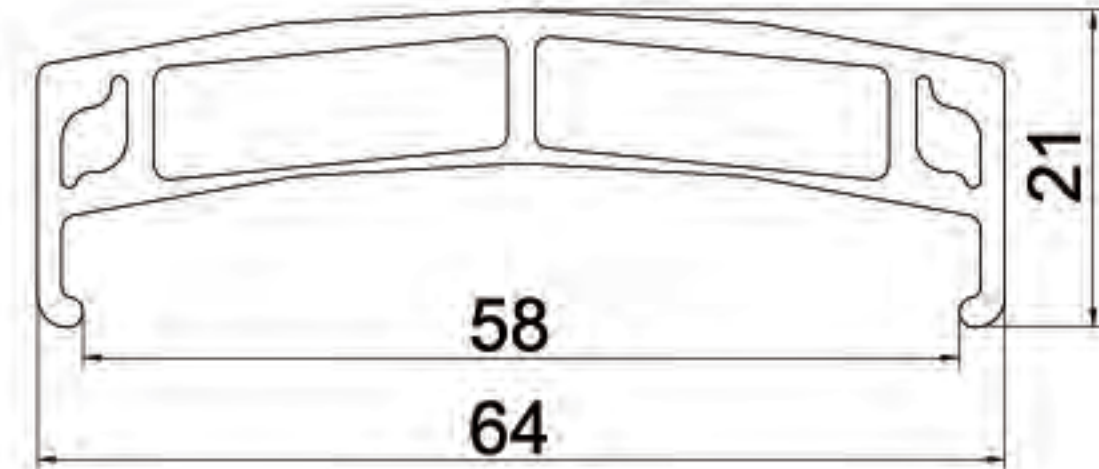

Size	Weight(g)	ERD(mm)
26"(559-58)	1380	534
24"(507-58)	1255	482
20"(406-58)	1008	380

Holes: 32H/36H/48H
Option: Eyelets
Joint: Pinned


DB-50

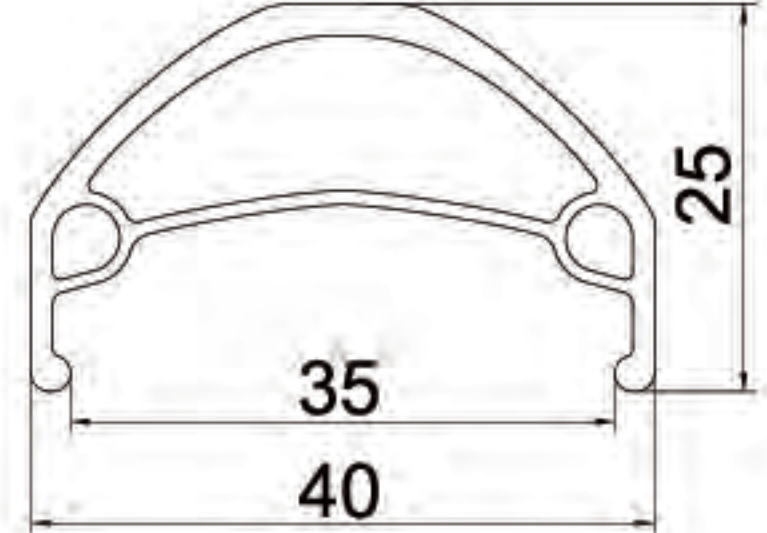

Size	Weight(g)	ERD(mm)
29"/700C(622-35)	866	589
27.5"(584-35)	815	551
26"(559-35)	795	528
24"(507-35)	720	476
20"(406-35)	585	374

Holes: 28H/32H/36H/48H
Option: Eyelets
Joint: Pinned


DB-45

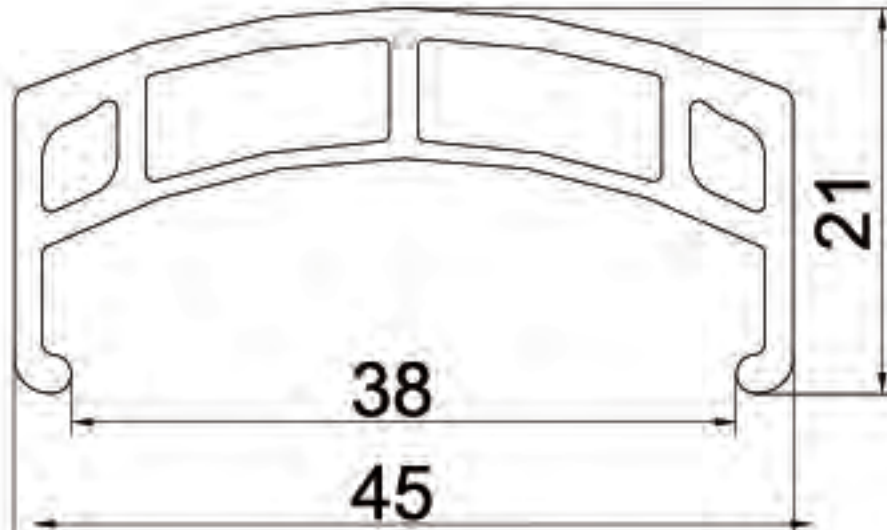

Size	Weight(g)	ERD(mm)
26"(559-38)	905	534
24"(507-38)	830	482
20"(406-38)	670	380
19"(381-38)	630	359

Holes: 32H/36H/48H
Option: Eyelets
Joint: Pinned


DB-42

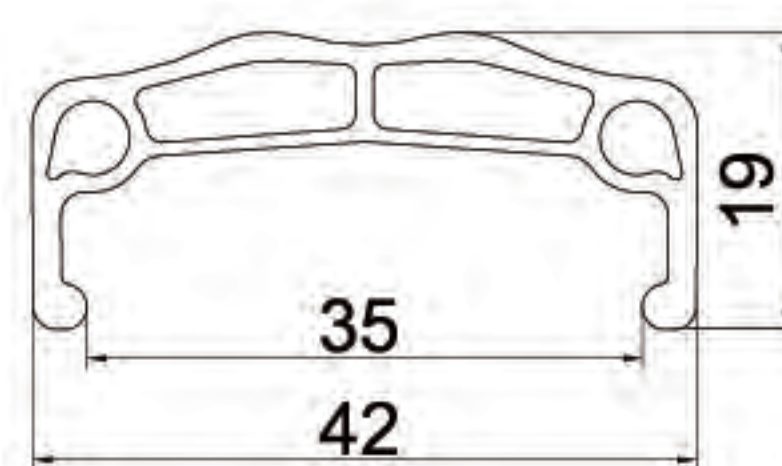

Size	Weight(g)	ERD(mm)
26"(559-35)	762	539

Holes: 32H/36H
Option: GSW/CSW
Joint: Pinned


DB-35

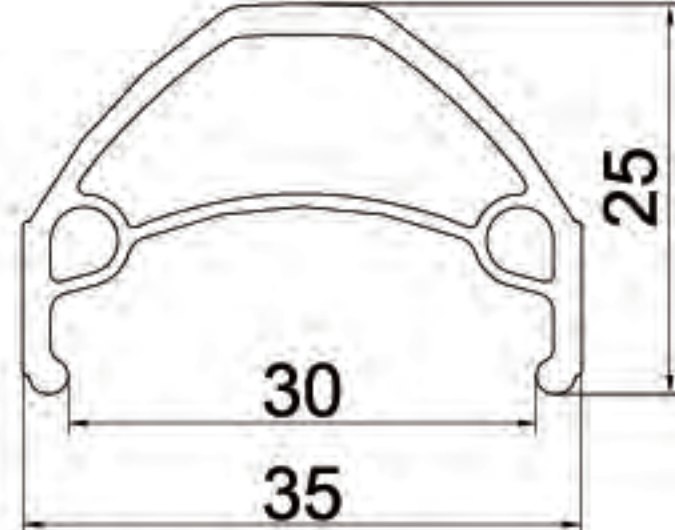

Size	Weight(g)	ERD(mm)
26"(559-30)	680	526
24"(507-30)	620	474

Holes: 32H/36H/48H
Option: Eyelets
Joint: Pinned


DB-32

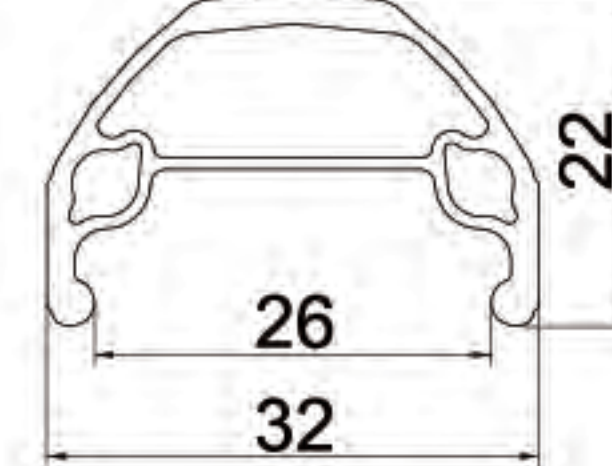

Size	Weight(g)	ERD(mm)
26"(559-26)	603	529
20"(406-26)	439	375

Holes: 28H/32H/36H/48H
Option: Eyelets/GSW/CSW
Joint: Pinned


DB-31

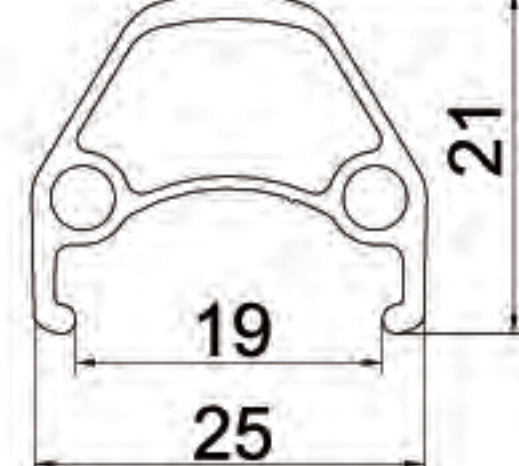

Size	Weight(g)	ERD(mm)
29"(622-19)	514	594
27.5"(584-19)	484	556
26"(559-19)	462	531

Holes: 24H/28H/32H/36H
Option: Eyelets
Joint: Pinned

DB-30

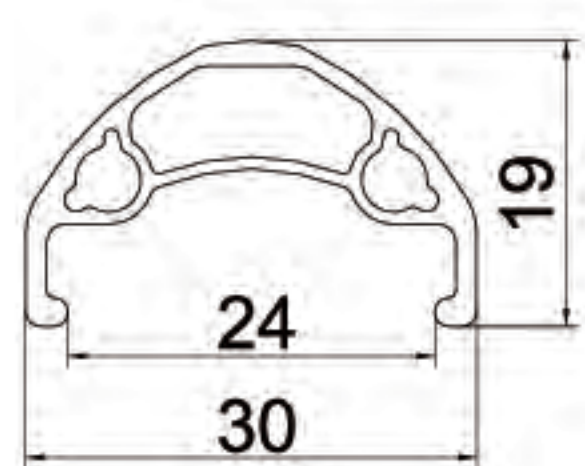

Size	Weight(g)	ERD(mm)
700C(622-24)	553	600
27.5"(584-24)	516	563
26"(559-24)	495	538


Holes: 28H/32H/36H
Option: Eyelets
Joint: Pinned

DOWNHILL



Size	Weight(g)	ERD(mm)
29er/700C(622-19)	534	600
27.5"(584-19)	500	563
26"(559-19)	475	538
24"(507-19)	434	486
20"(406-19)	350	385

Holes: 28H/32H/36H
Option: Eyelets
Joint: Pinned

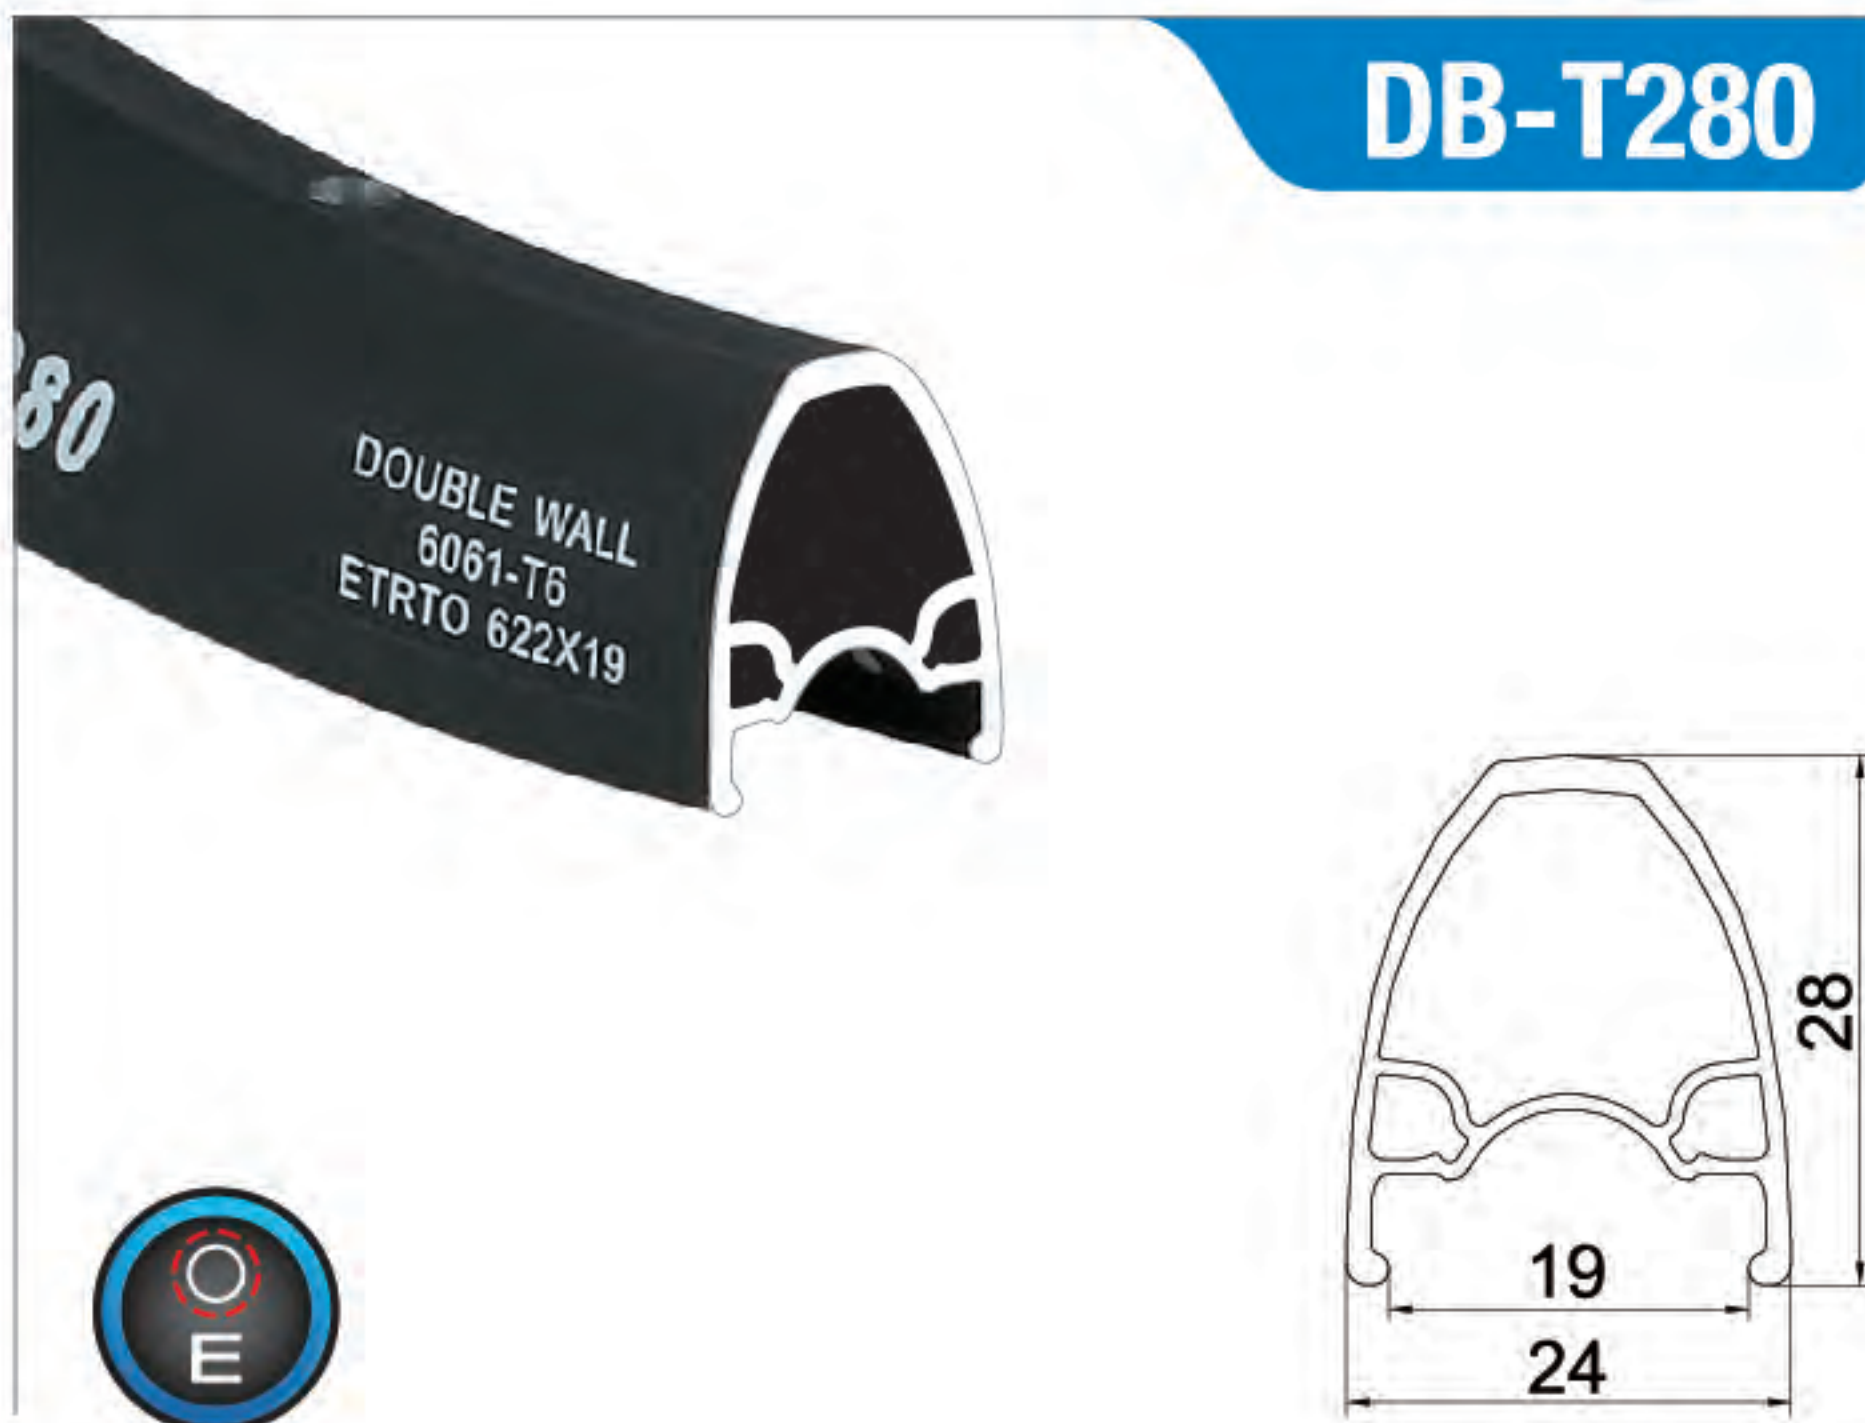


Size	Weight(g)	ERD(mm)
700C(622-19)	572	581

Holes: 28H/32H
Option: Eyelets
Joint: Pinned




Size	Weight(g)	ERD(mm)
29"(622-25)	558	602
27.5"(584-25)	530	564

Holes: 28H/32H/36H
Option: Eyelets
Joint: Sleeved

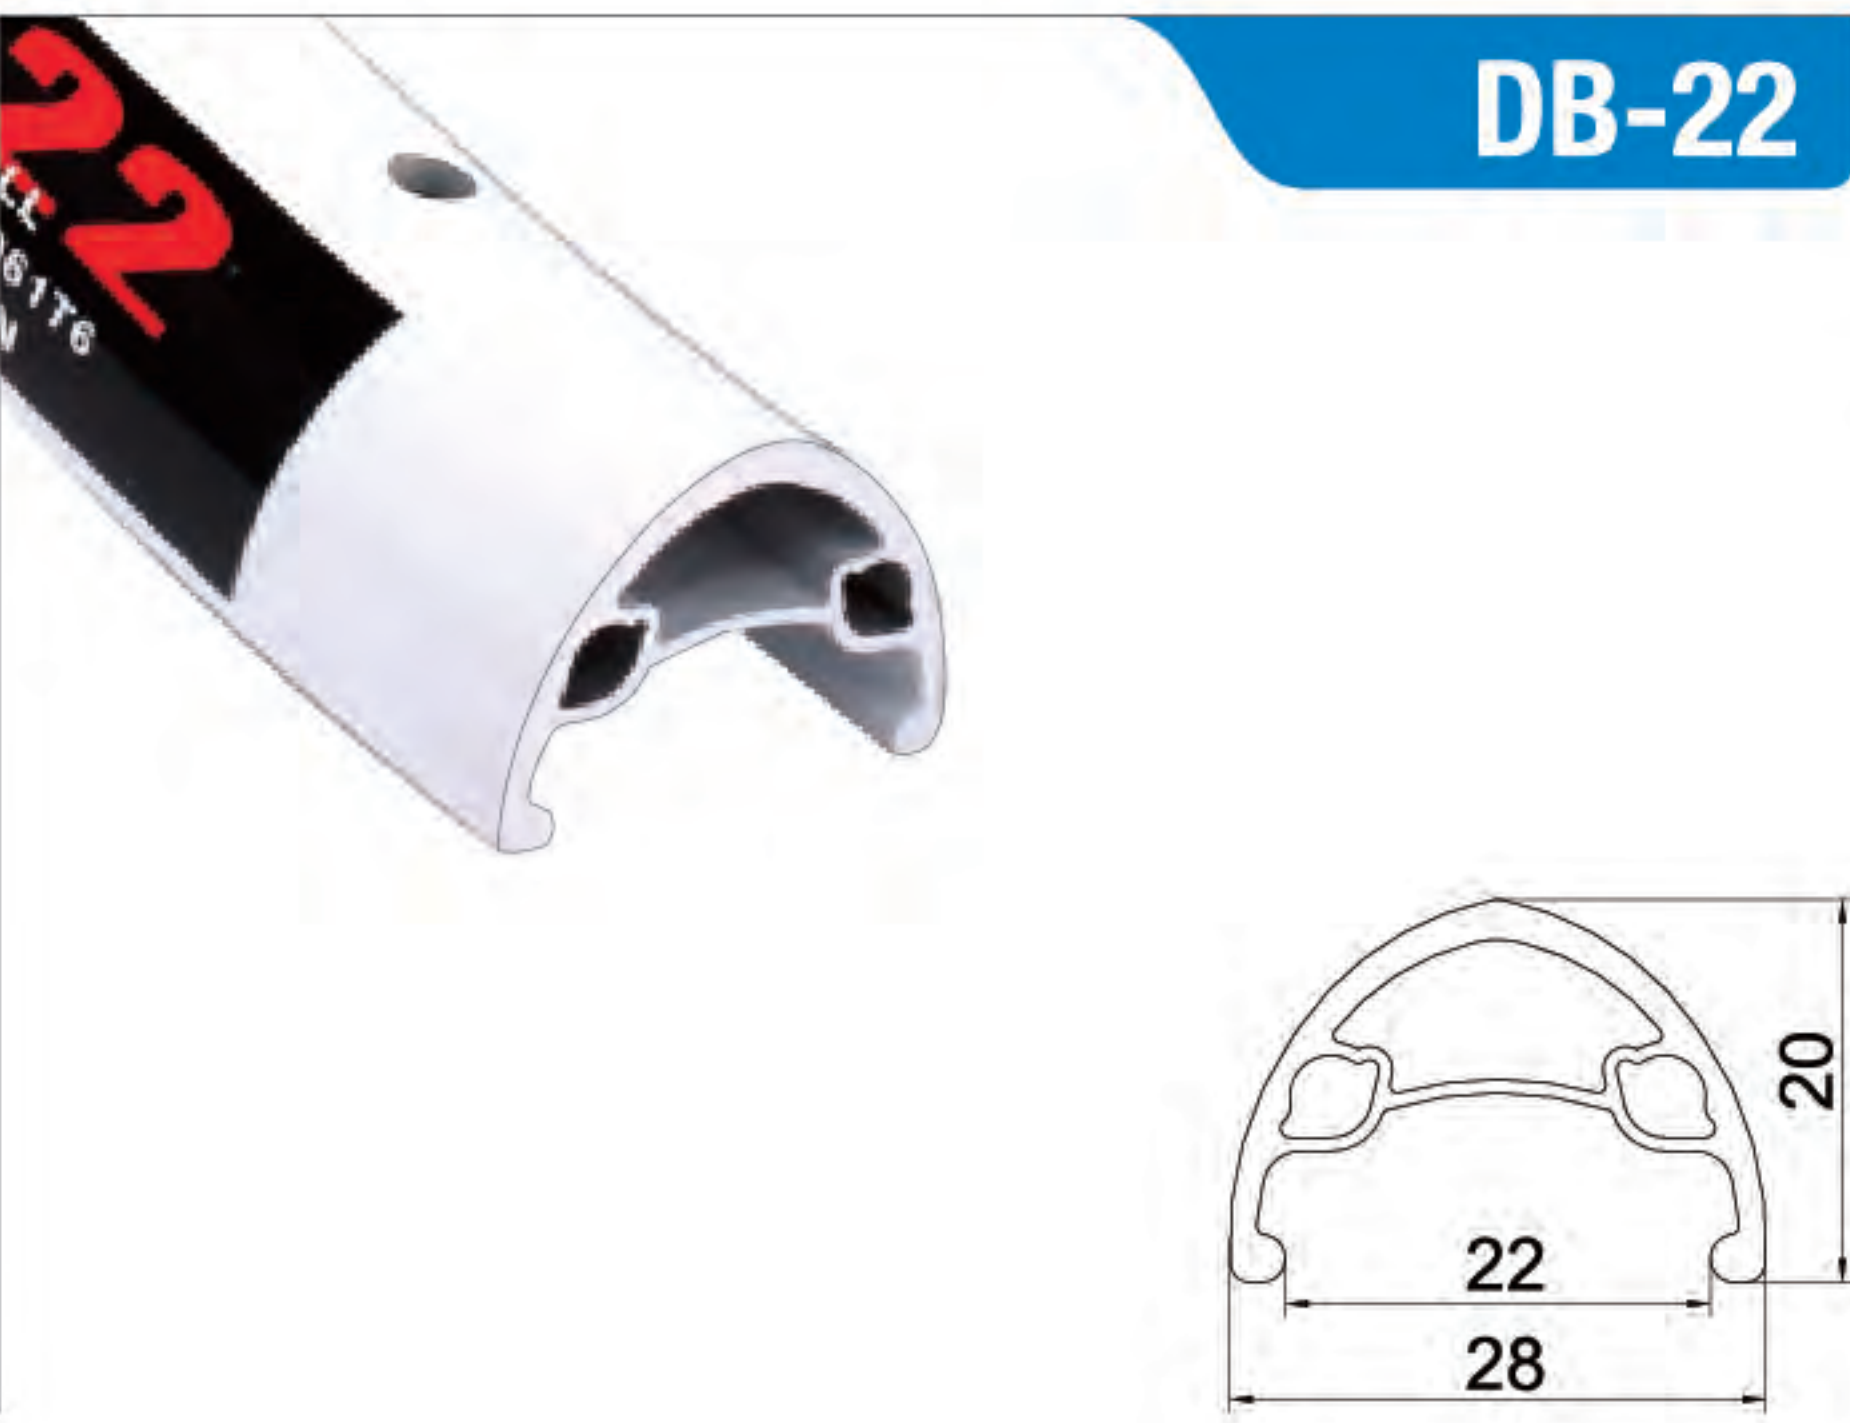


Size	Weight(g)	ERD(mm)
700C(622-22)	584	598
26"(559-22)	525	536

Holes: 28H/32H/36H
Option: Pinned

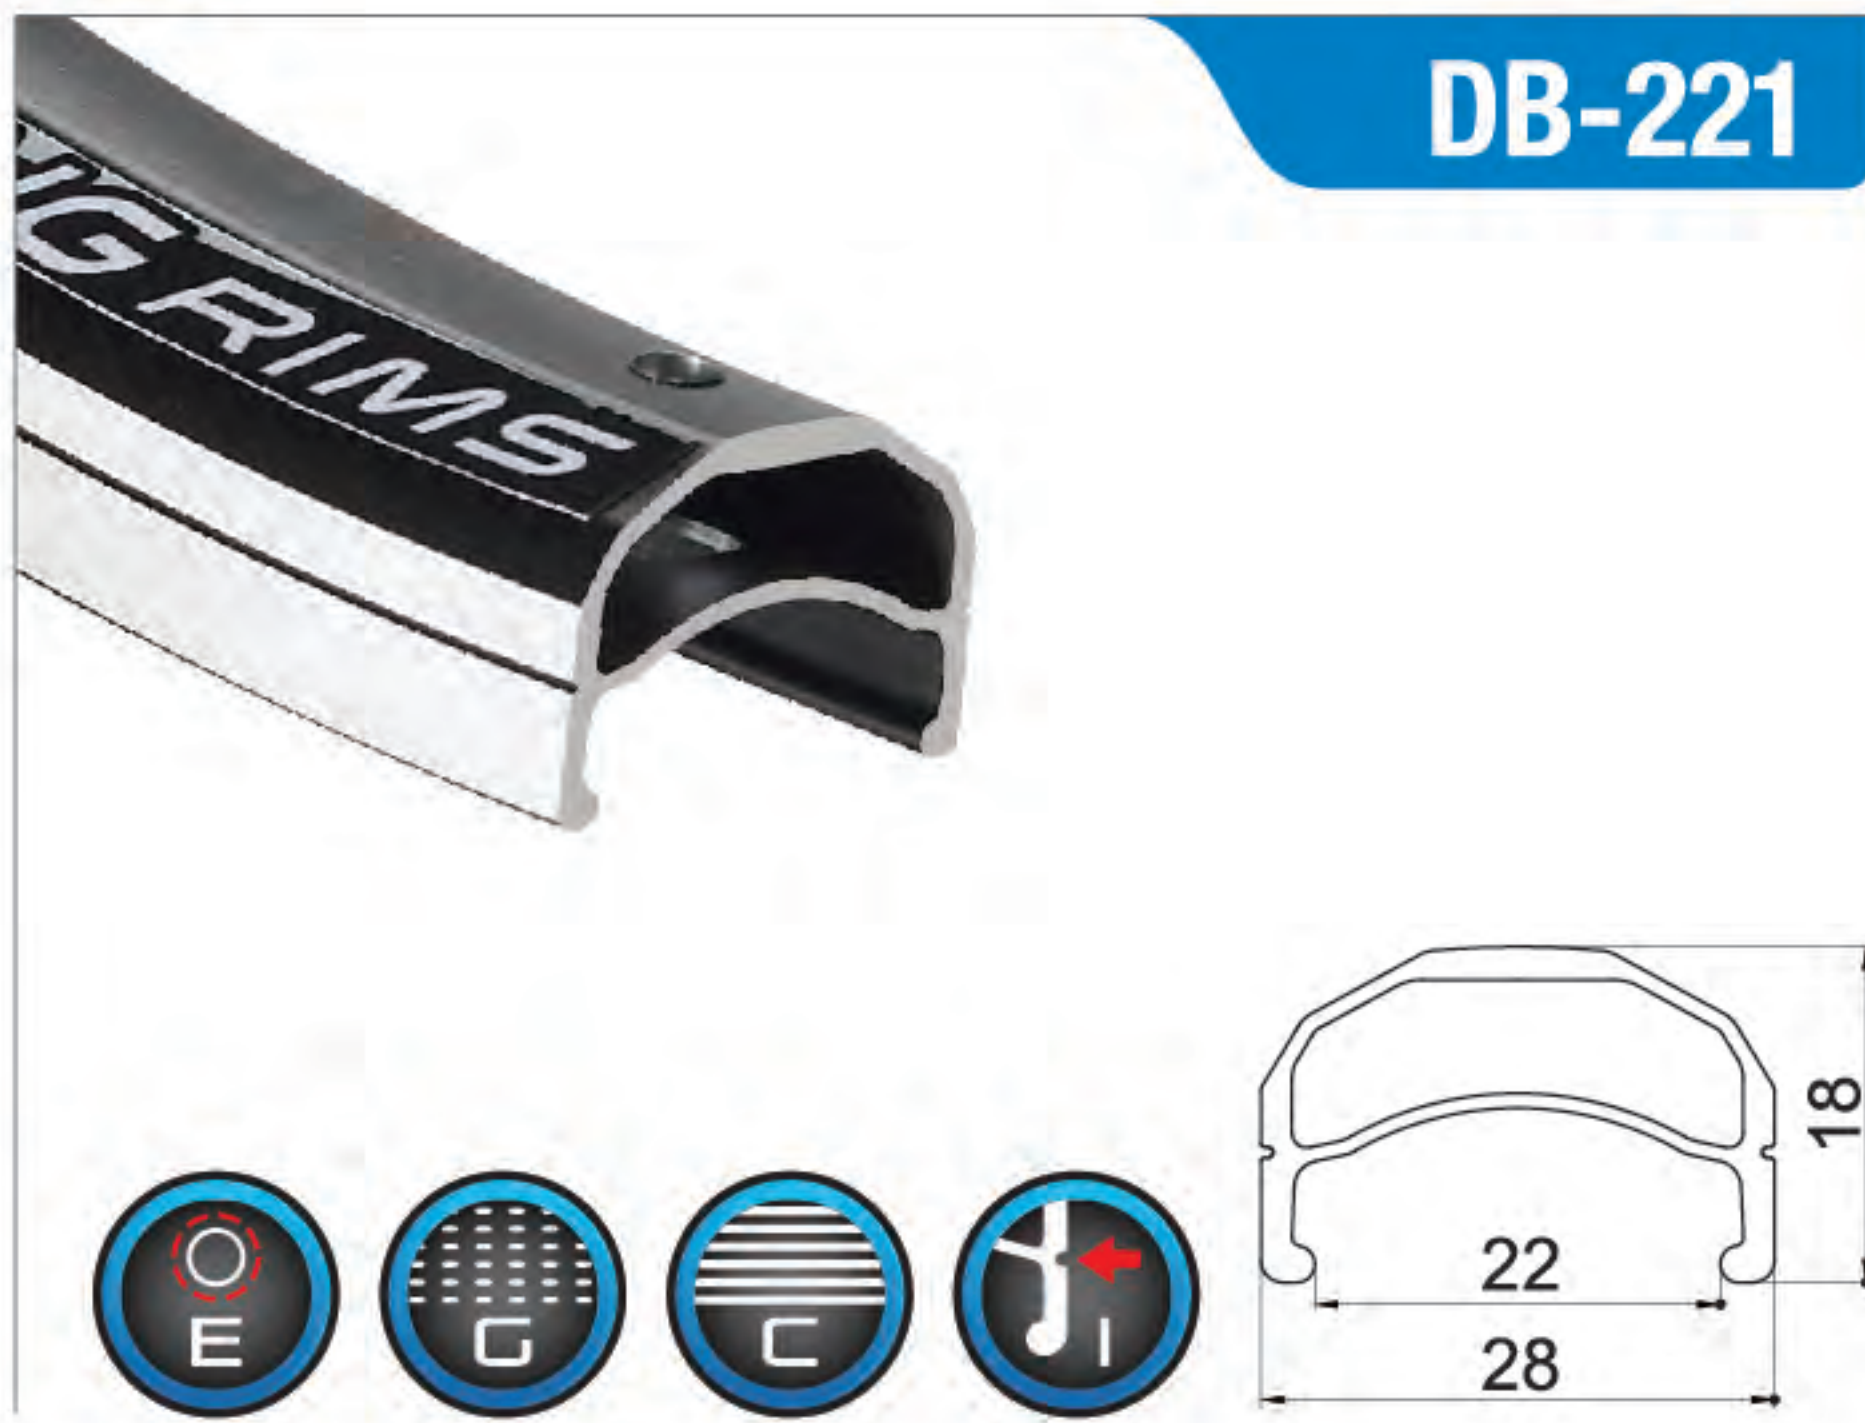

Size	Weight(g)	ERD(mm)
26"(559-22)	460	539
24"(507-22)	420	487
20"(406-22)	338	386

Holes: 32H/36H/48H
Option: Eyelets/GSW/CSW
Joint: Sleeved

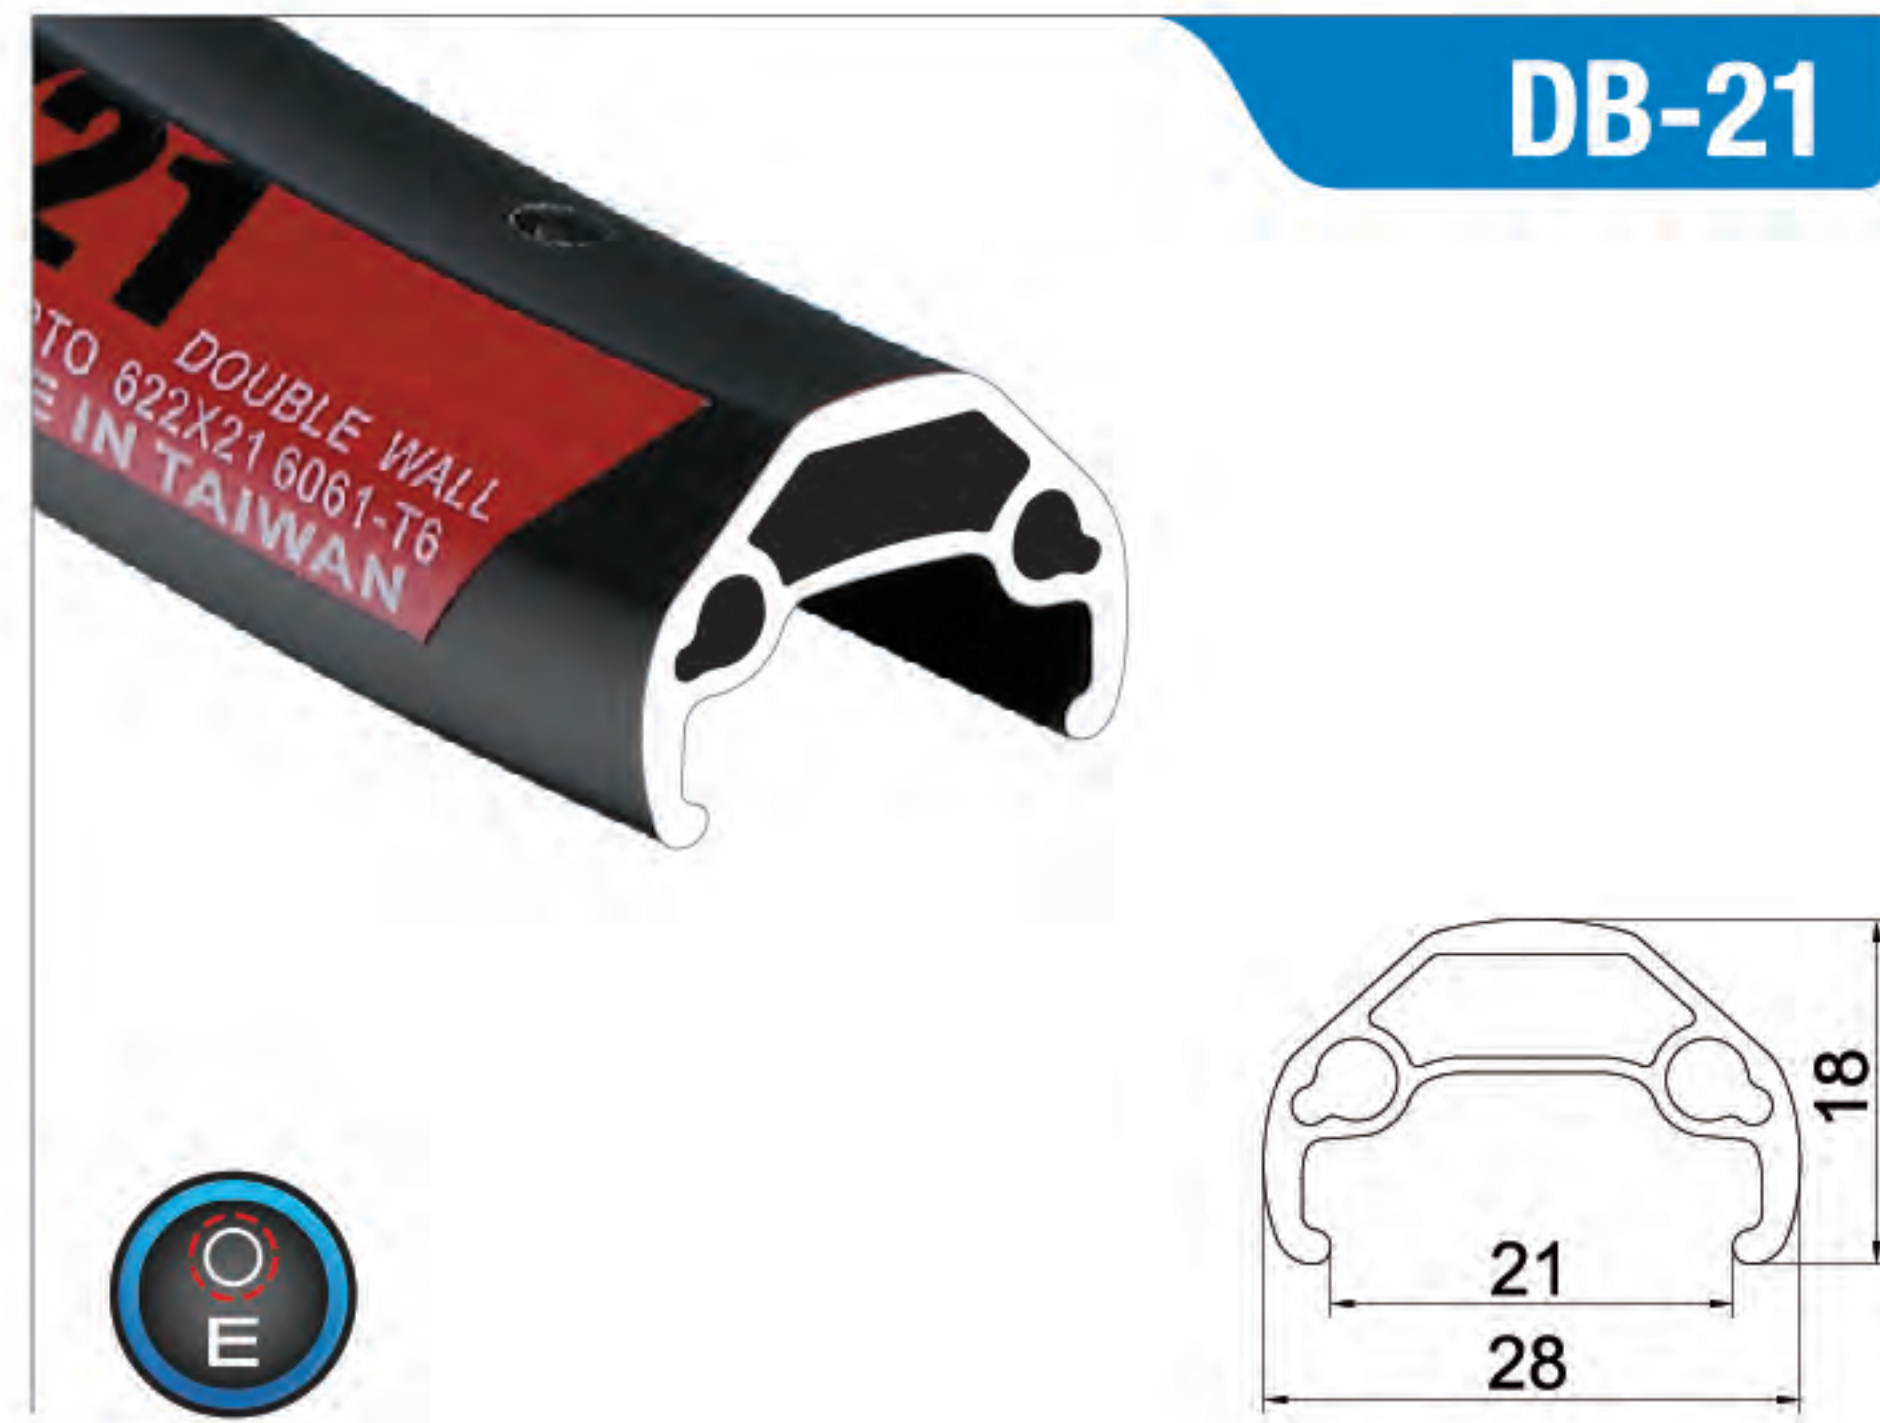

Size	Weight(g)	ERD(mm)
29"(622-21)	529	603
27.5"(584-21)	498	565
26"(559-21)	476	540


Holes: 24H/28H/32H/36H
Option: Eyelets
Joint: Pinned

DOWNHILL



Size	Weight(g)	ERD(mm)
700C(622-17)	513	602
27.5"(584-17)	482	563
26"(559-17)	462	540

Holes: 28H/32H/36H
Option: Eyelets
Joint: Pinned

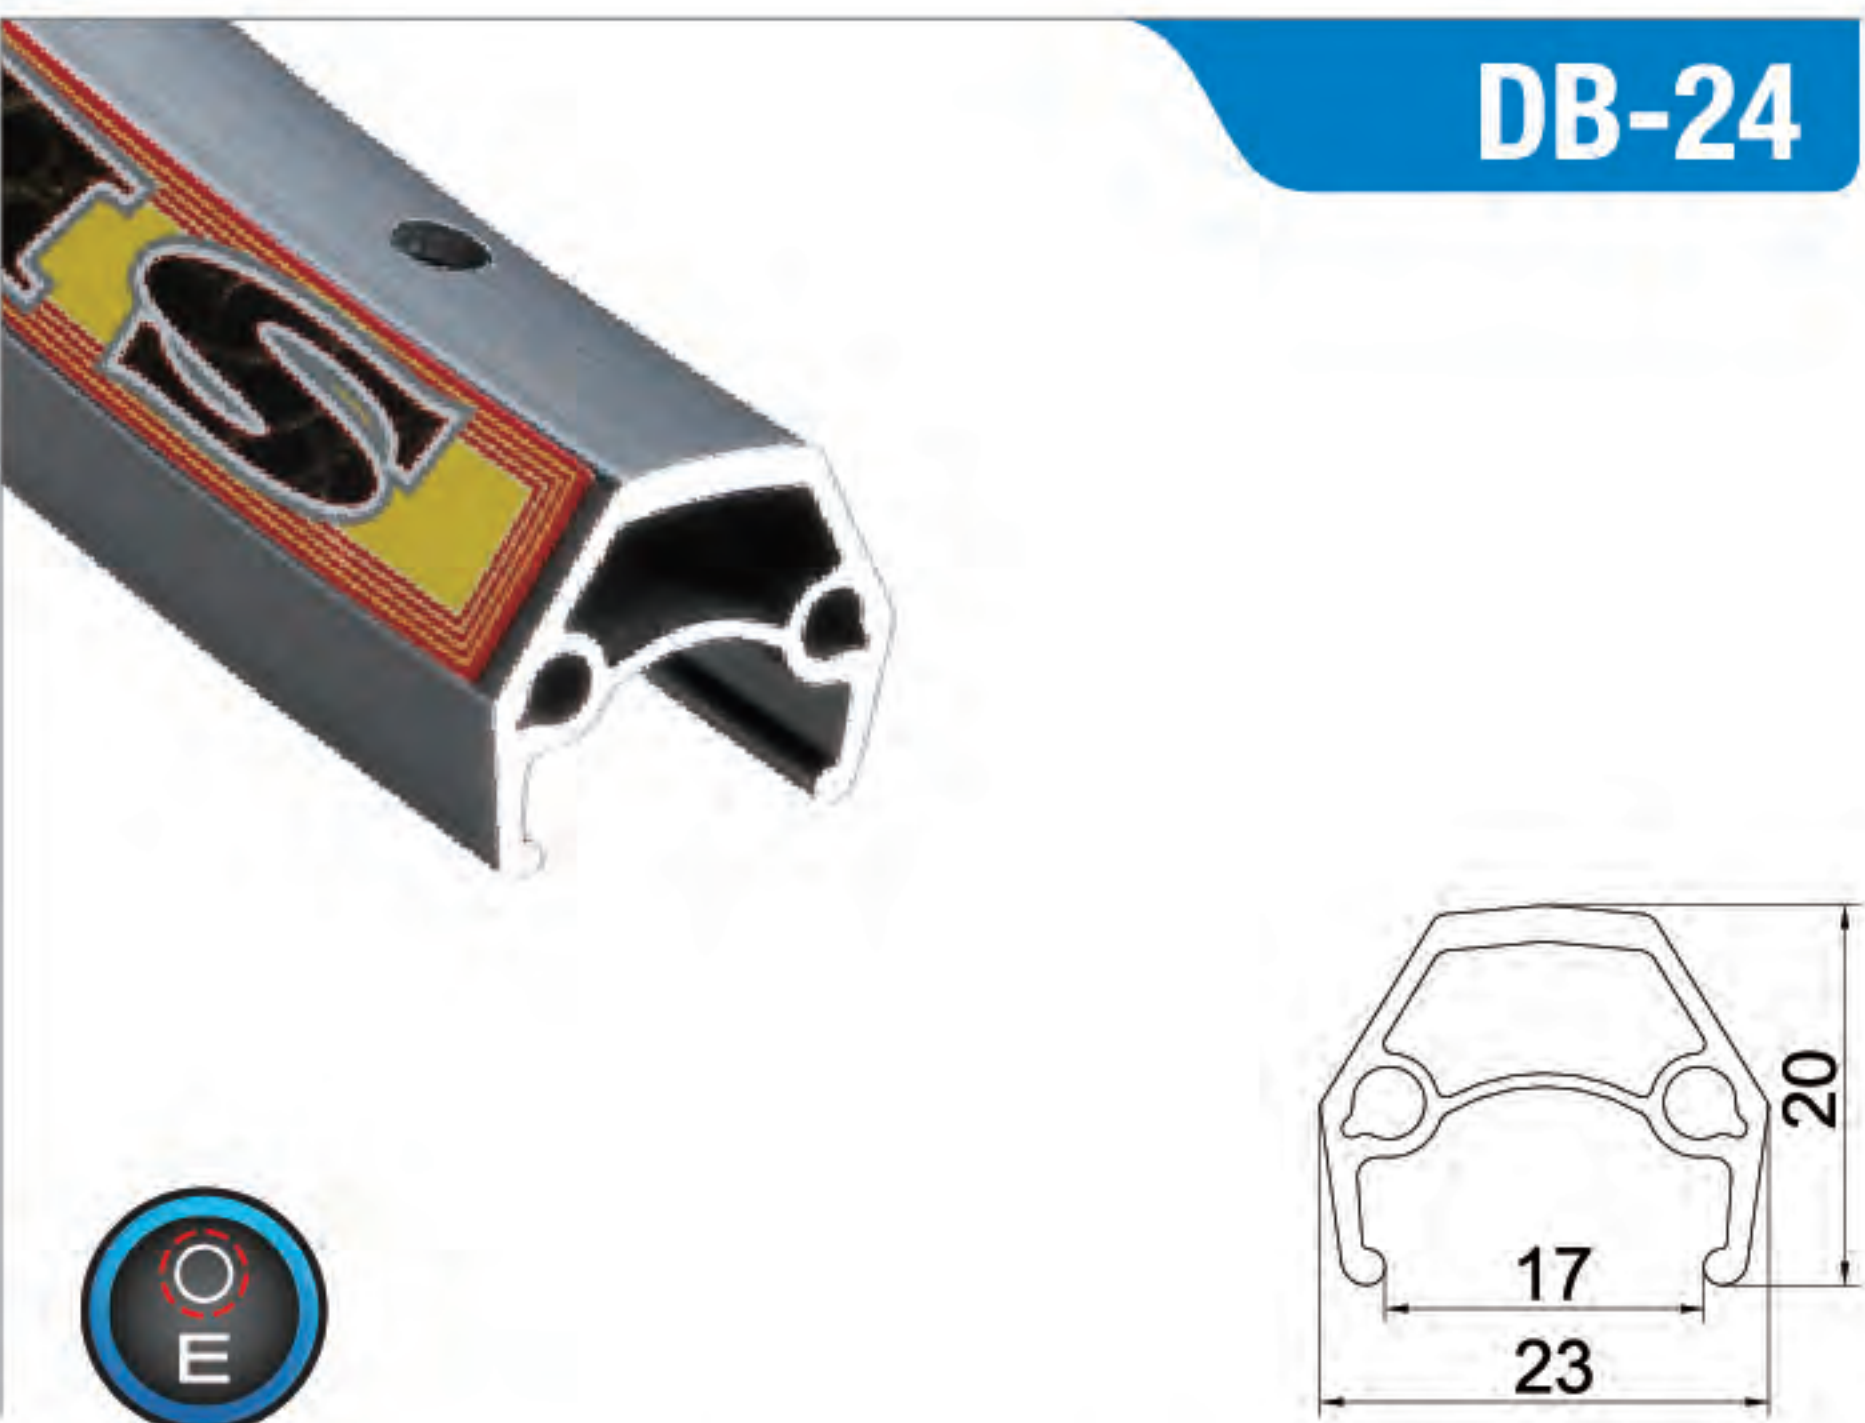

Size	Weight(g)	ERD(mm)
700C(622-17)	512	599
26"(559-17)	455	536
24"(507-17)	415	484

Holes: 32H/36H
Option: Eyelets
Joint: Pinned



Size	Weight(g)	ERD(mm)
700C(622-18)	500	600
26"(559-18)	450	540
24"(507-18)	408	488


Holes: 28H/32H/36H
Option: Eyelets
Joint: Pinned



Size	Weight(g)	ERD(mm)
29er/700C(622-19)	475	601
27.5"(584-19)	439	563
26"(559-19)	425	538
24"(507-19)	382	486

Holes: 28H/32H/36H
Option: Eyelets
Joint: Pinned

BMX & FREESTYLE

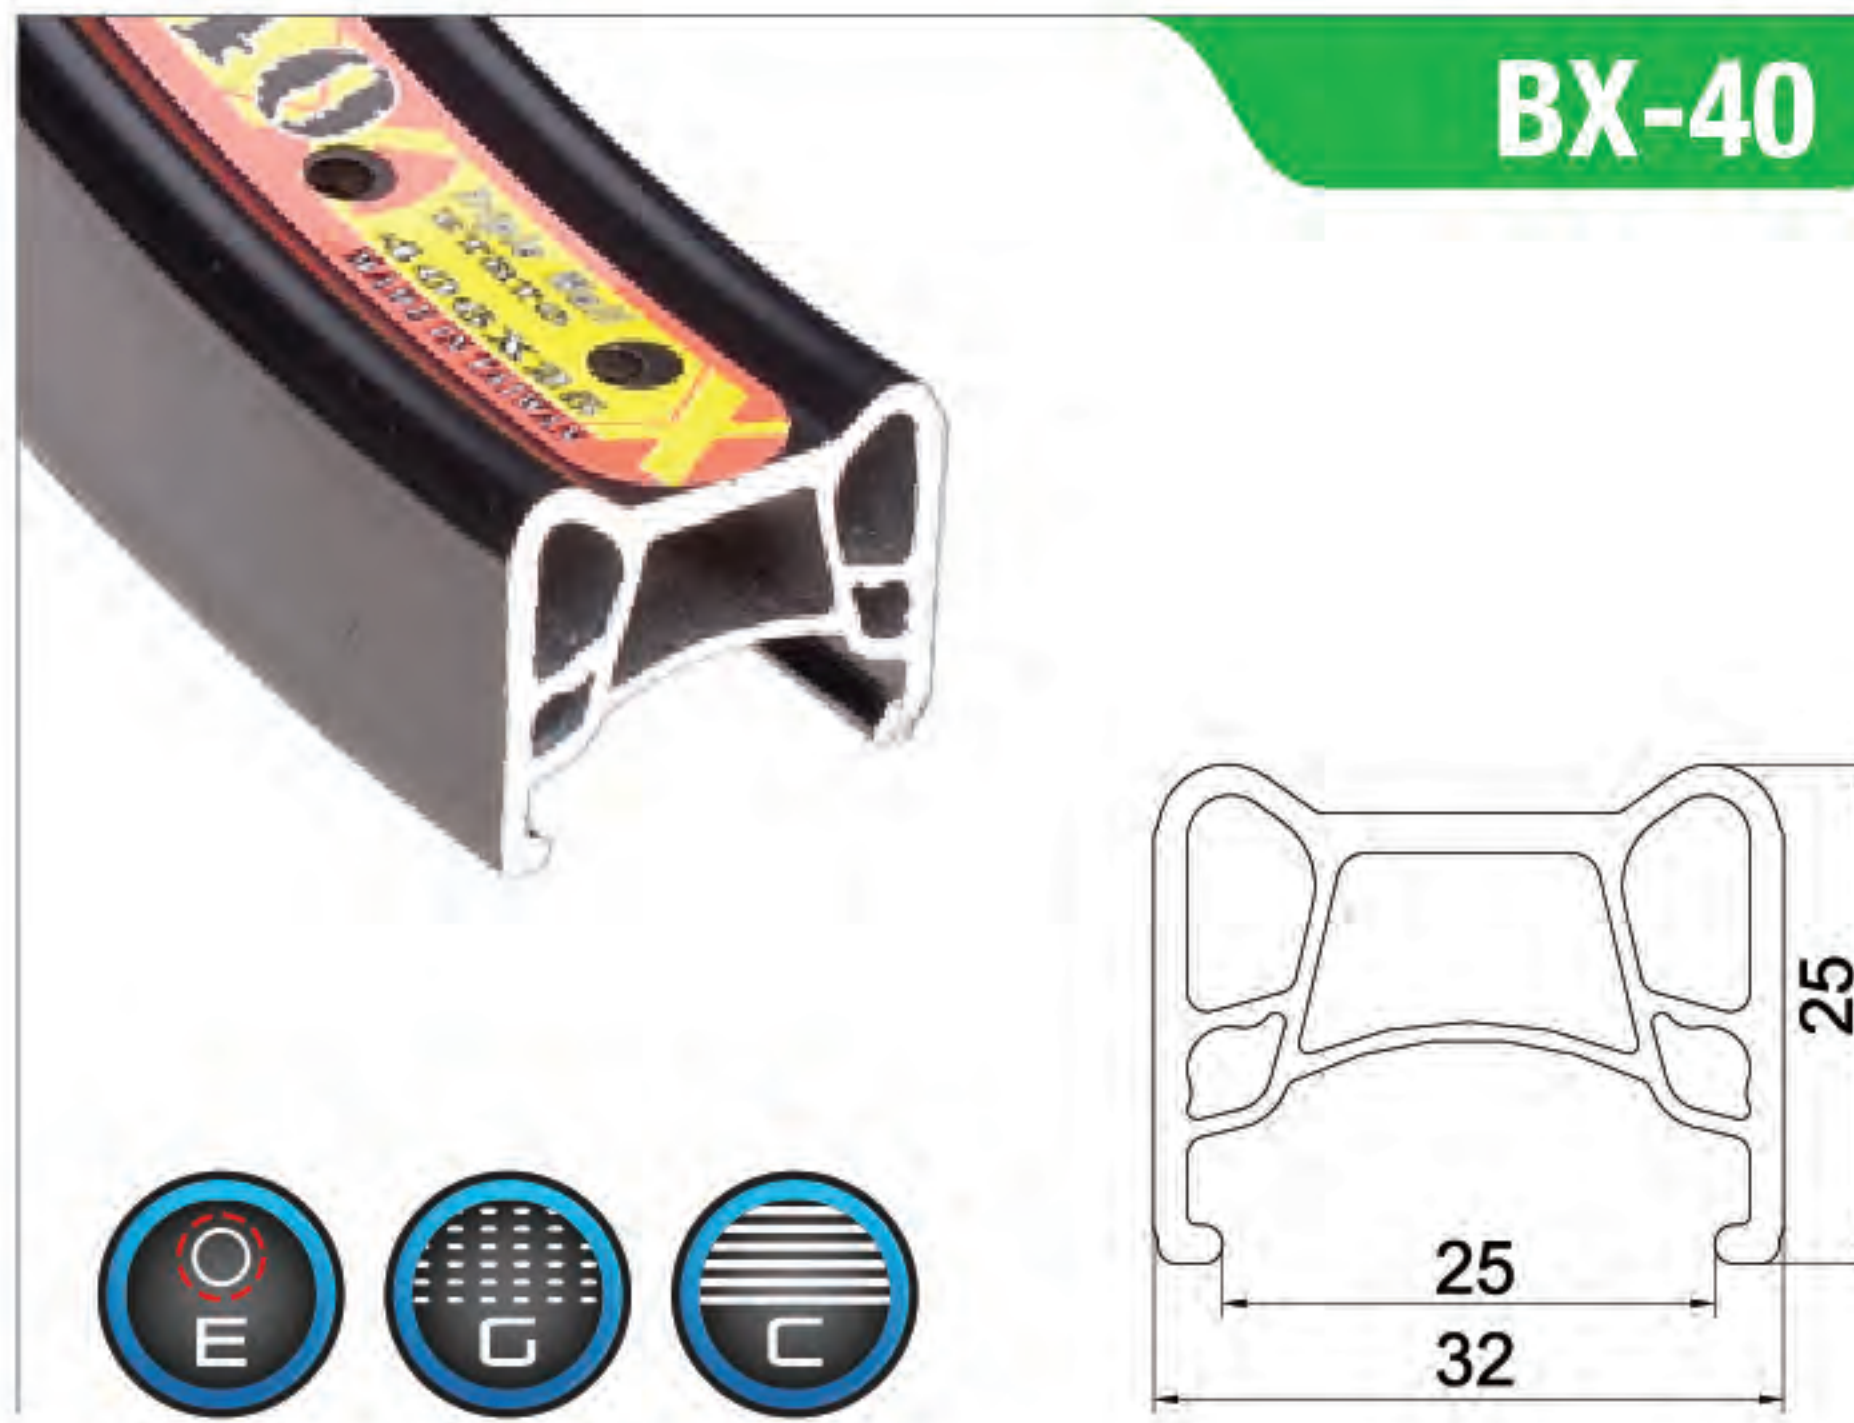


Size	Weight(g)	ERD(mm)
20"(406-25)	690	372

Holes: 32H/36H/48H
Option: Eyelets/GSW/CSW
Joint: Pinned



Size	Weight(g)	ERD(mm)
26"(559-32)	725	544
24"(507-32)	660	492
20"(406-32)	530	390
16"(305-32)	405	290

Holes: 24H/32H/36H/48H
Option: Eyelets/GSW/CSW
Joint: Pinned

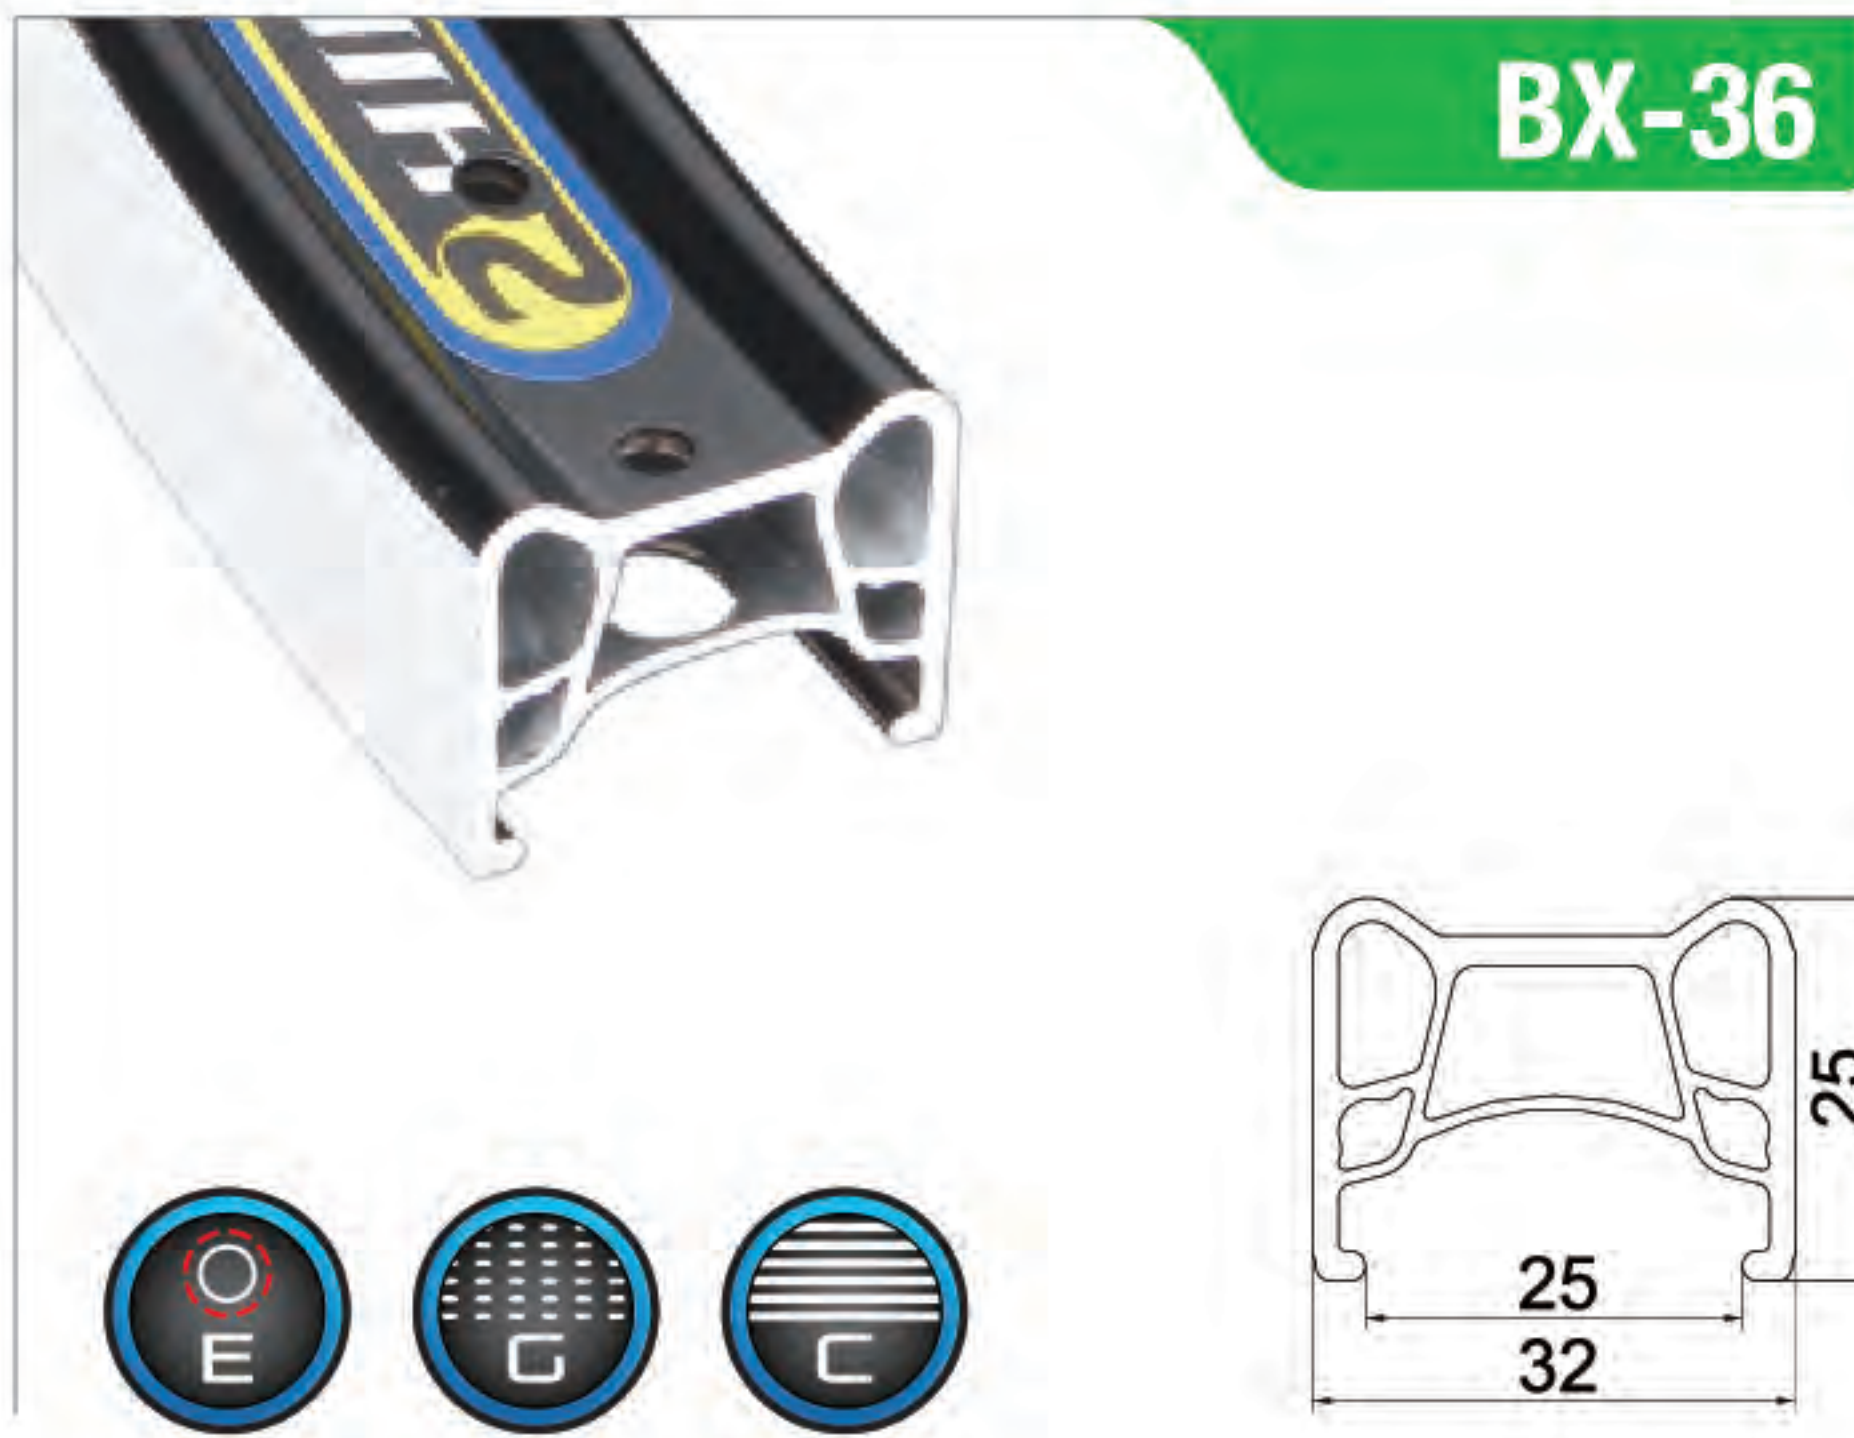


Size	Weight(g)	ERD(mm)
20"(406-25)	690	372

Holes: 32H/36H/48H
Option: Eyelets/GSW/CSW
Joint: Pinned




Size	Weight(g)	ERD(mm)
20"(406-26)	550	388

Holes: 32H/36H/48H
Option: Eyelets/GSW/CSW
Joint: Welded

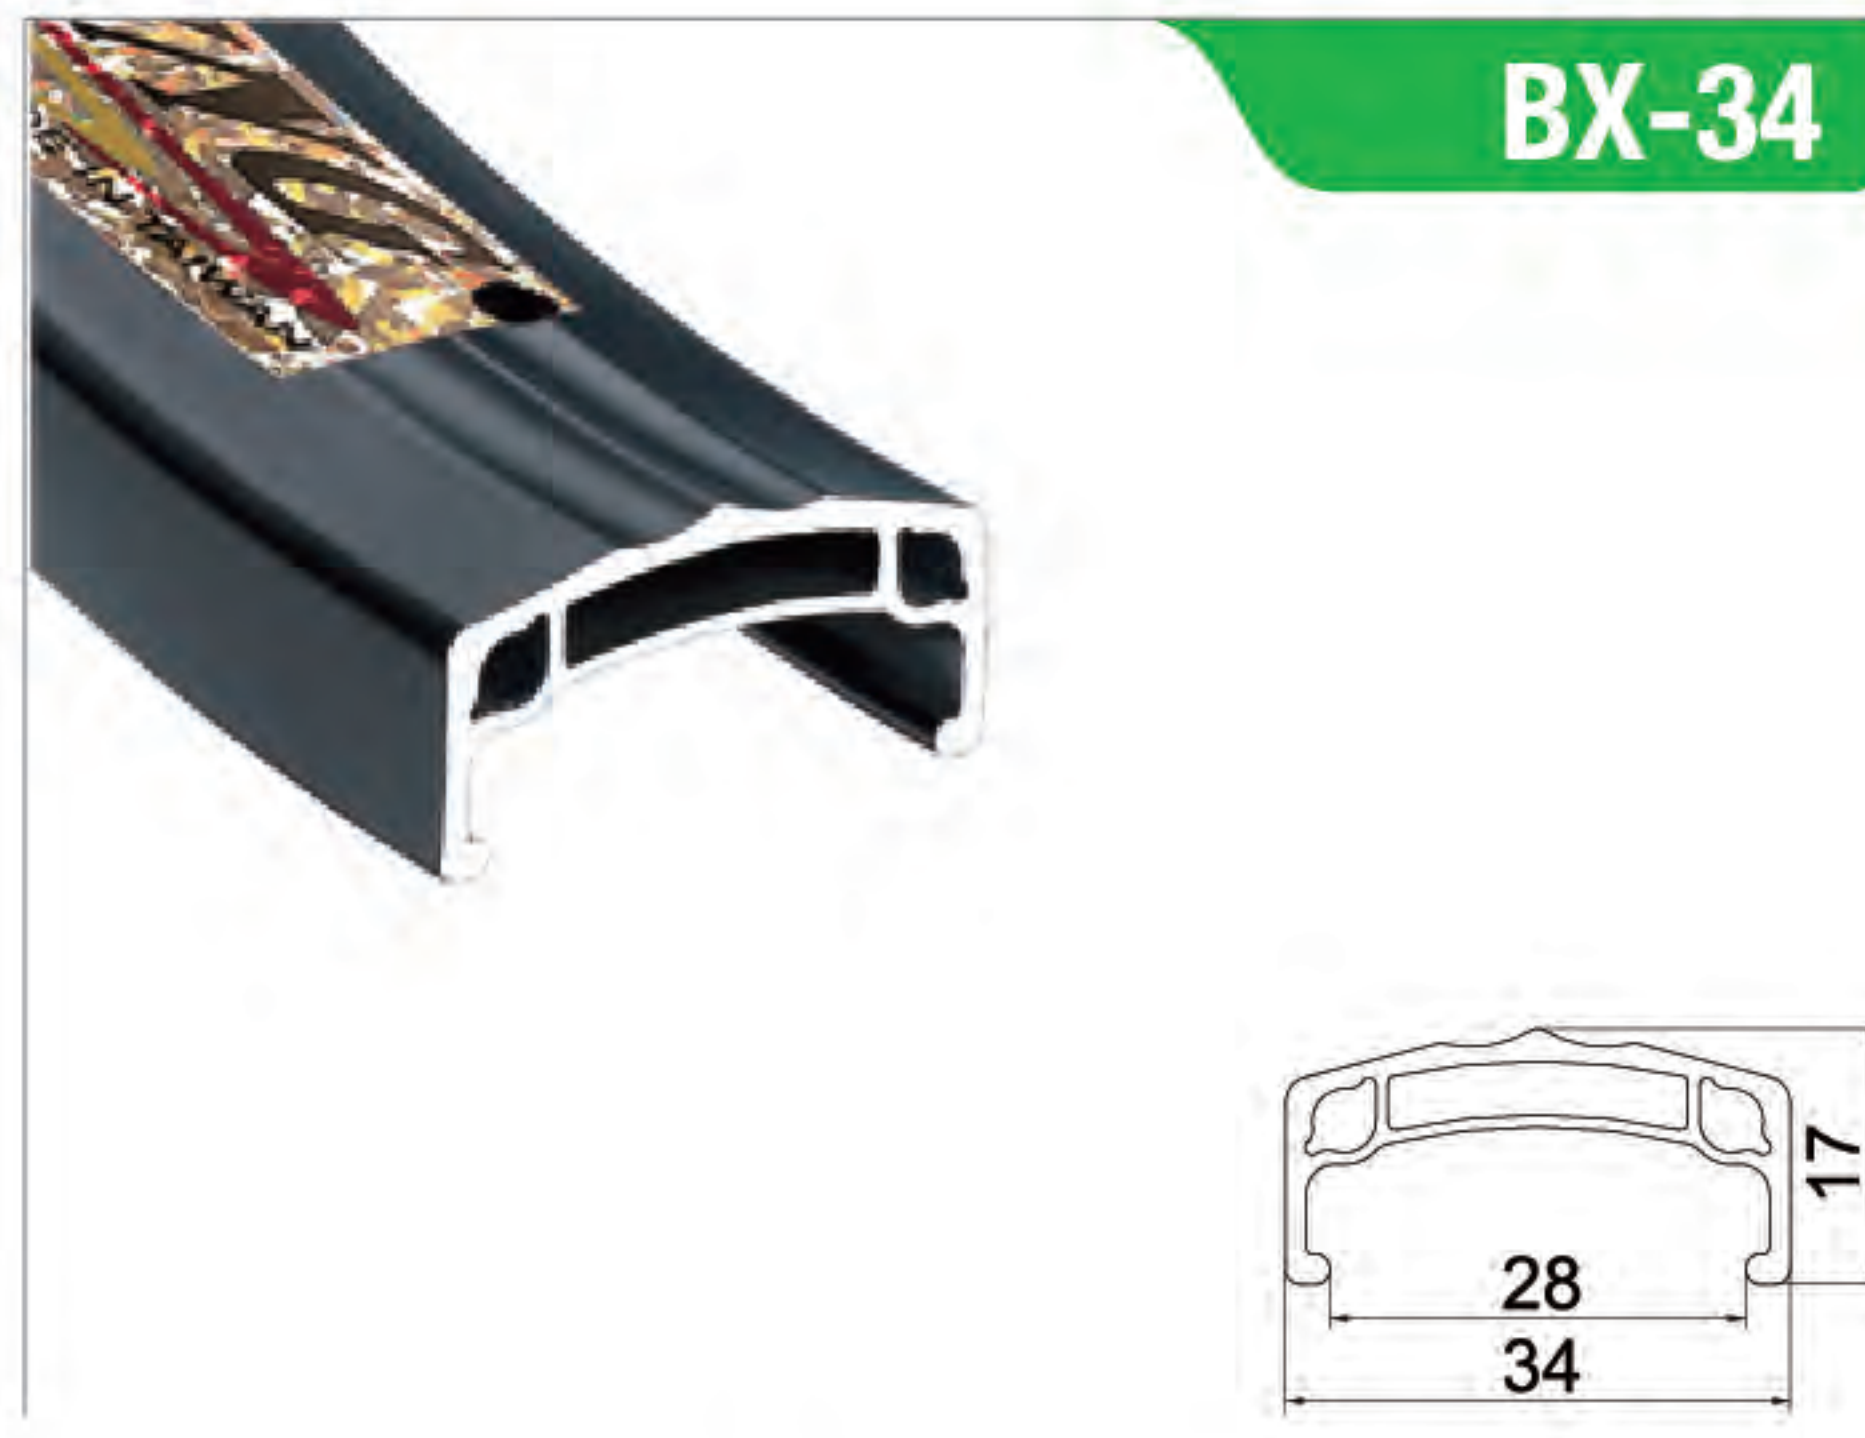


Size	Weight(g)	ERD(mm)
26"(559-28)	572	540
20"(406-28)	417	386

Holes: 20H/28H/32H/36H/48H
Option:
Joint: Pinned

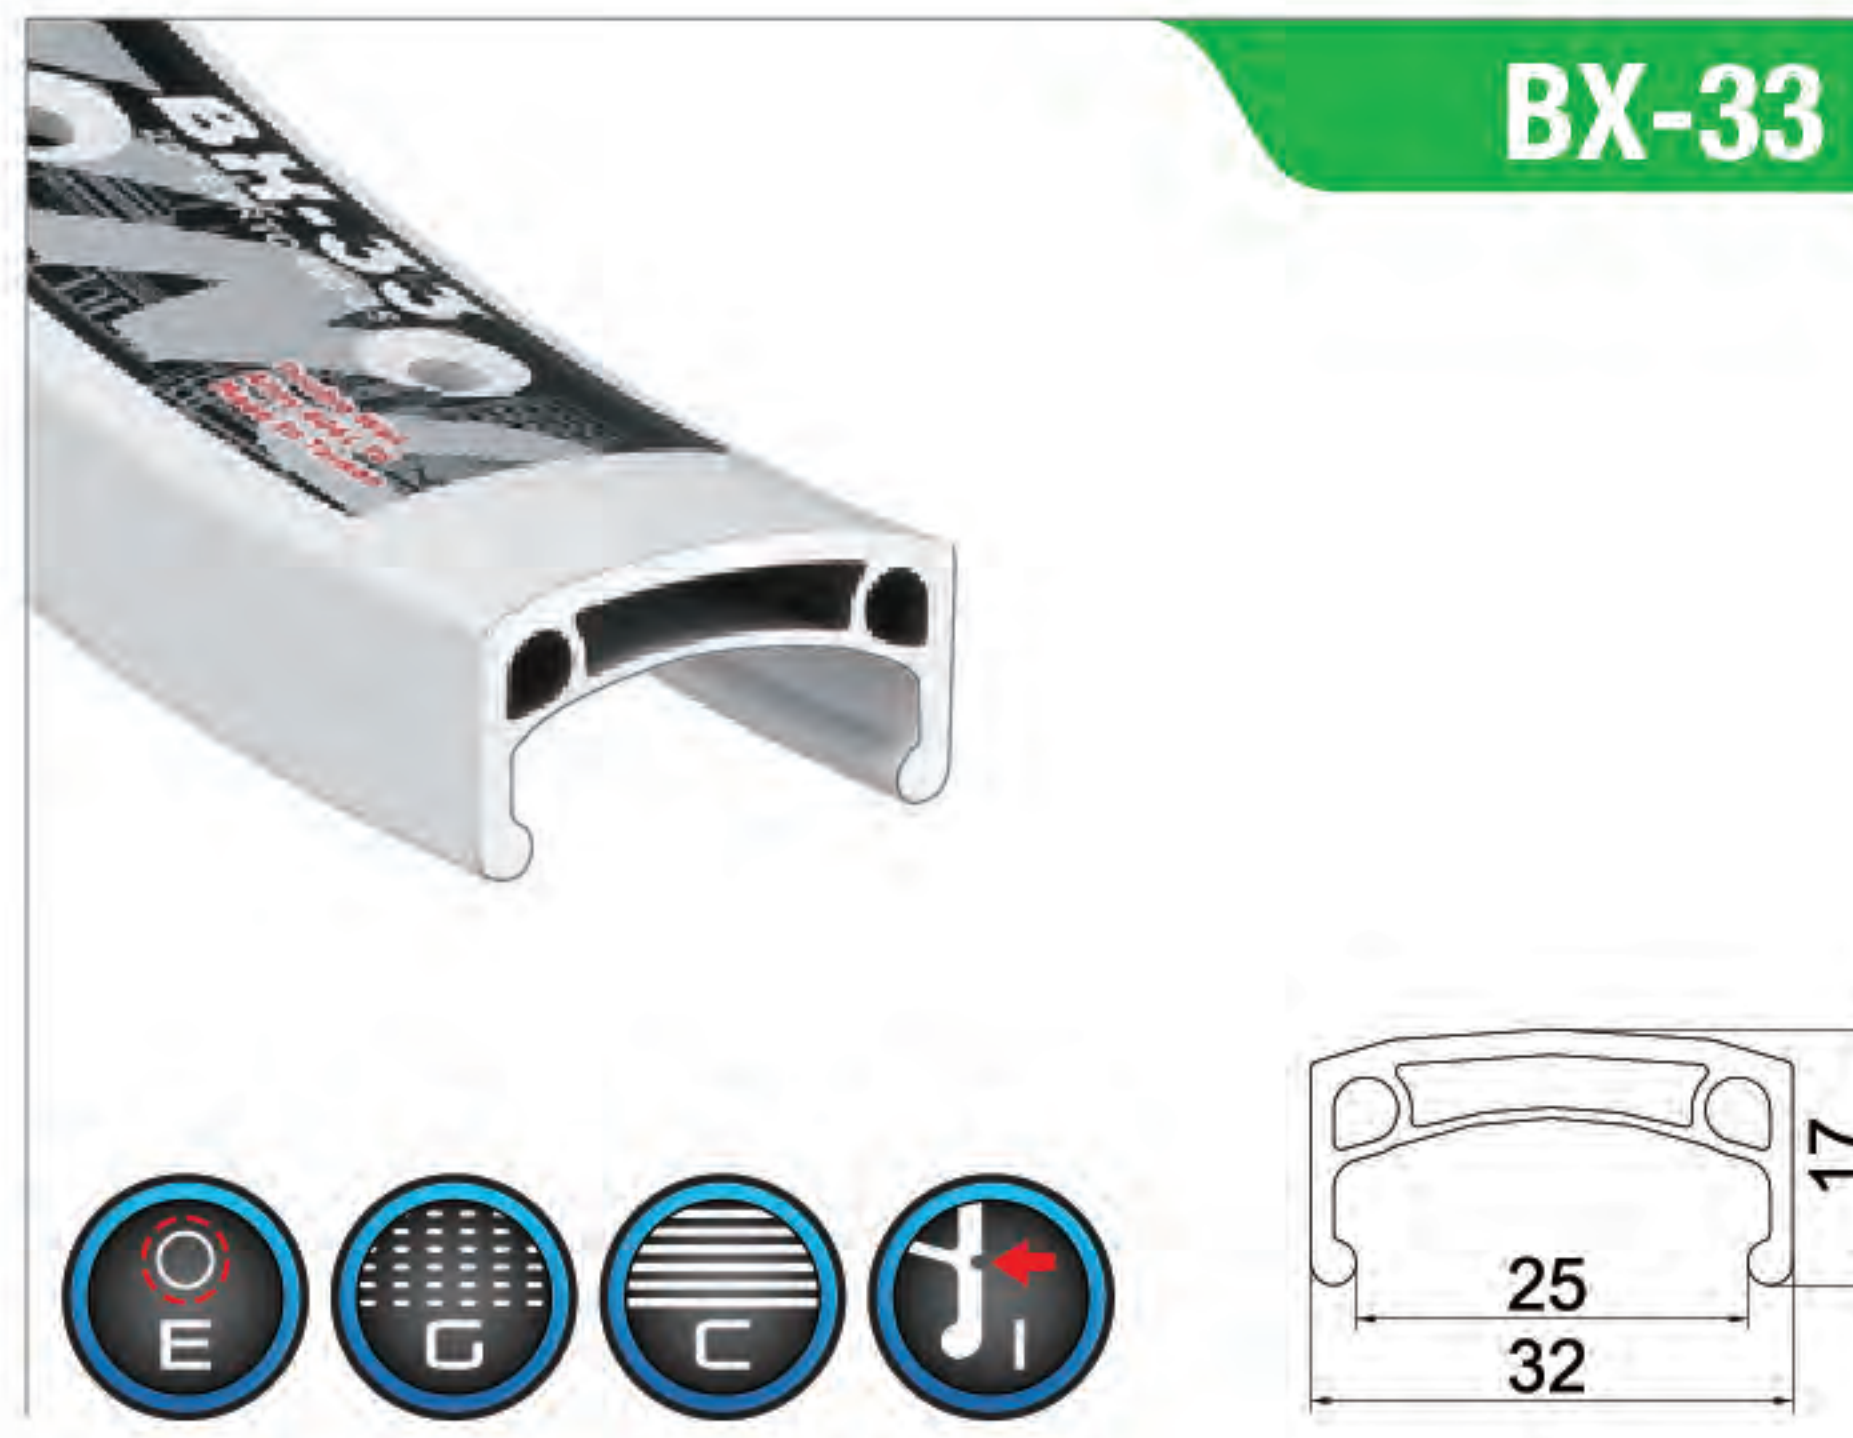


Size	Weight(g)	ERD(mm)
20"(406-25)	460	388
16"(305-25)	345	288

Holes: 28H/32H/36H/48H
Option: Eyelets/GSW/CSW
Joint: Pinned

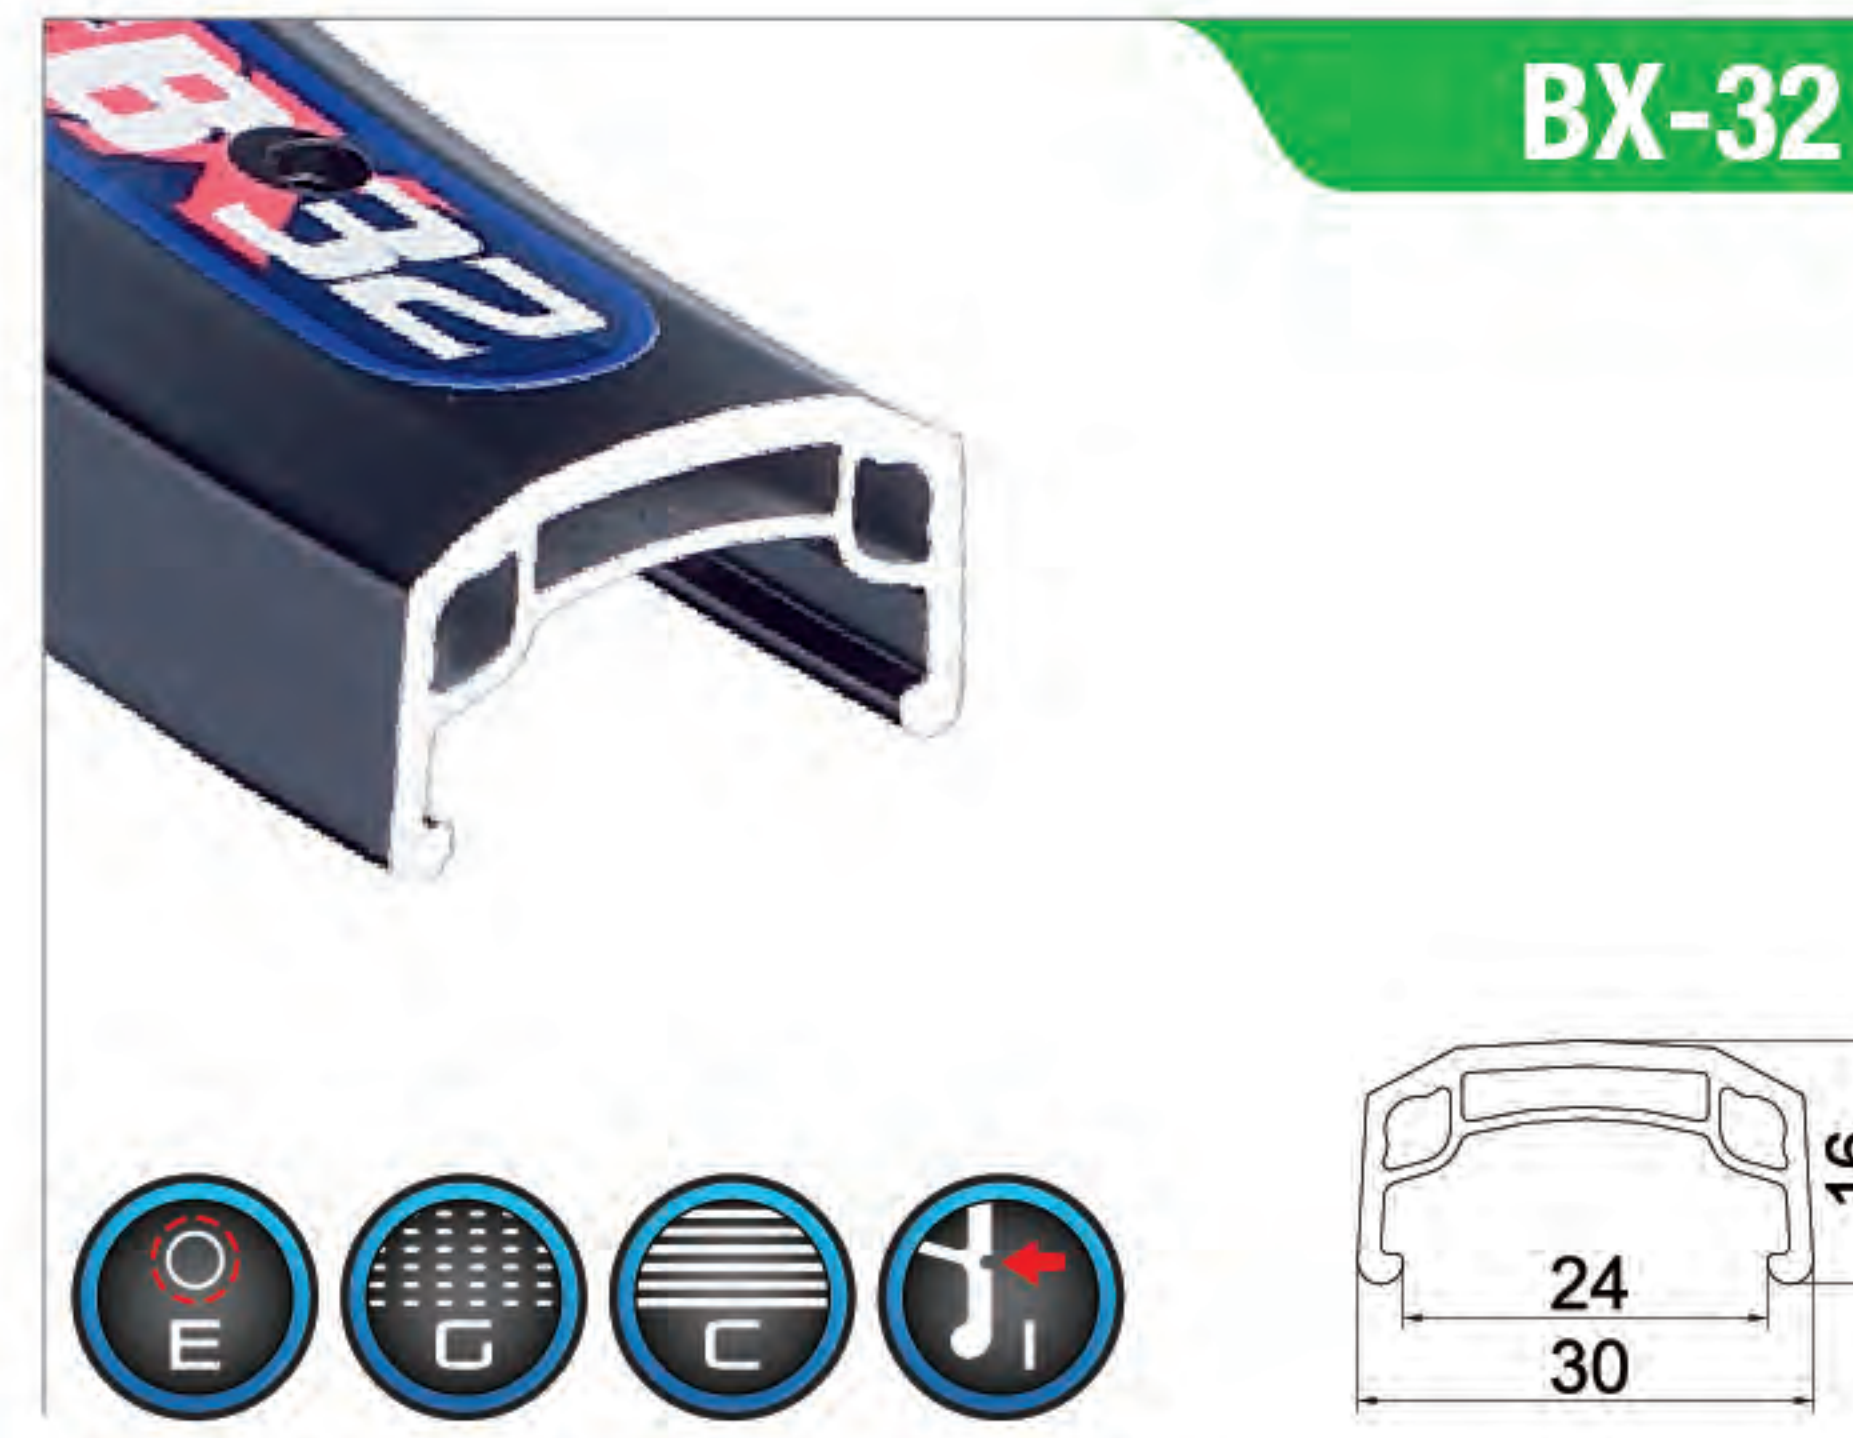


Size	Weight(g)	ERD(mm)
700C(622-24)	588	606
27.5"(584-24)	555	569
26"(559-24)	530	544
24"(507-24)	480	492
20"(406-24)	385	390
16"(305-24)	290	290

Holes: 28H/32H/36H/48H
Option: Eyelets/GSW/CSW
Joint: Pinned

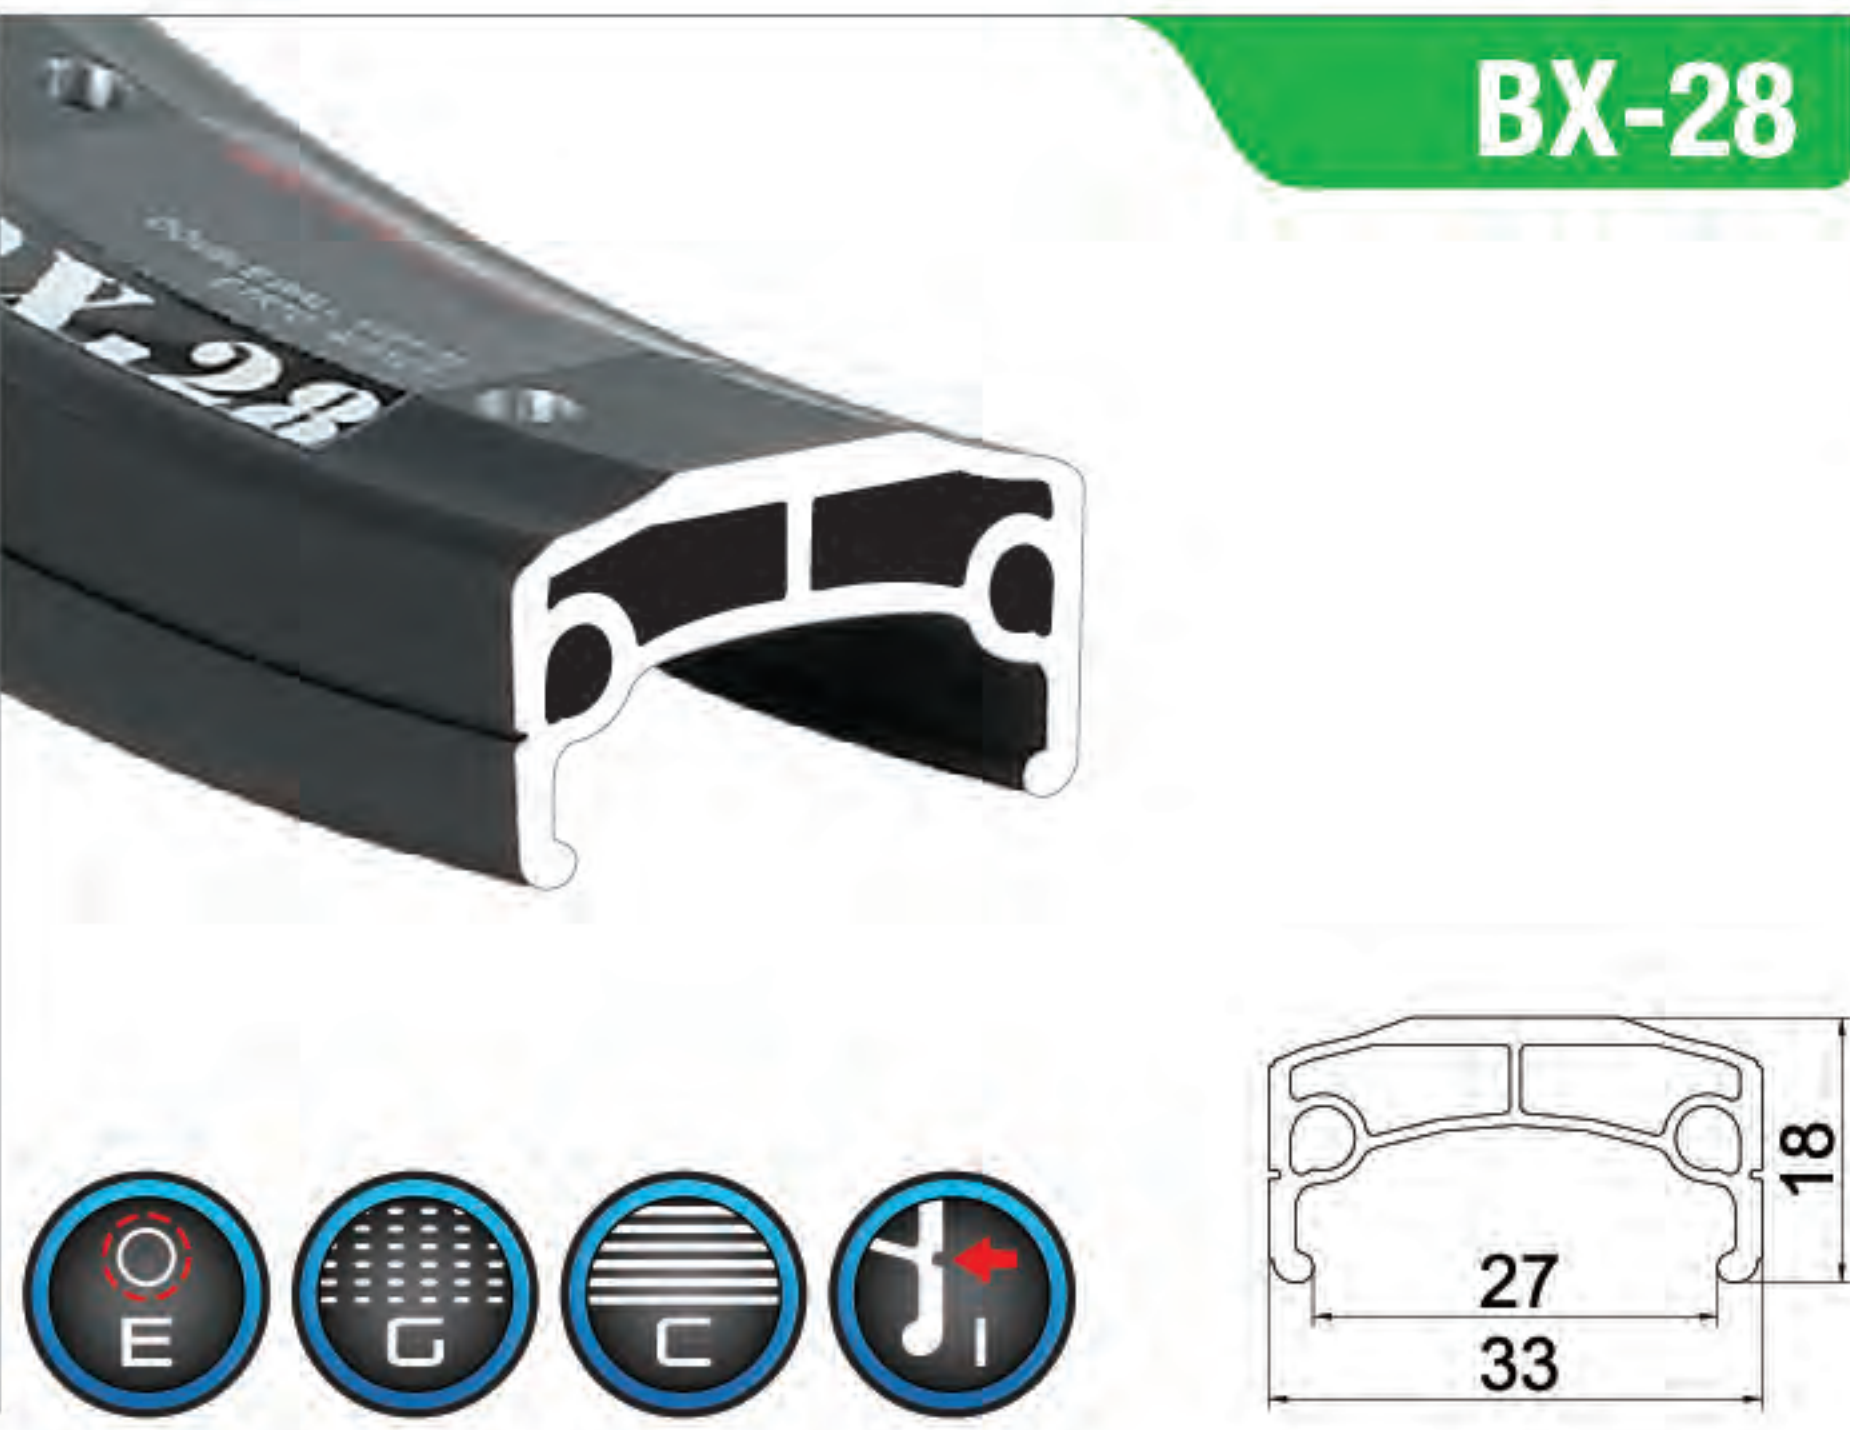


Size	Weight(g)	ERD(mm)
26"(559-27)	664	540
20"(406-27)	484	386

Holes: 28H/32H/36H/48H
Option: Eyelets/GSW/CSW
Joint: Pinned

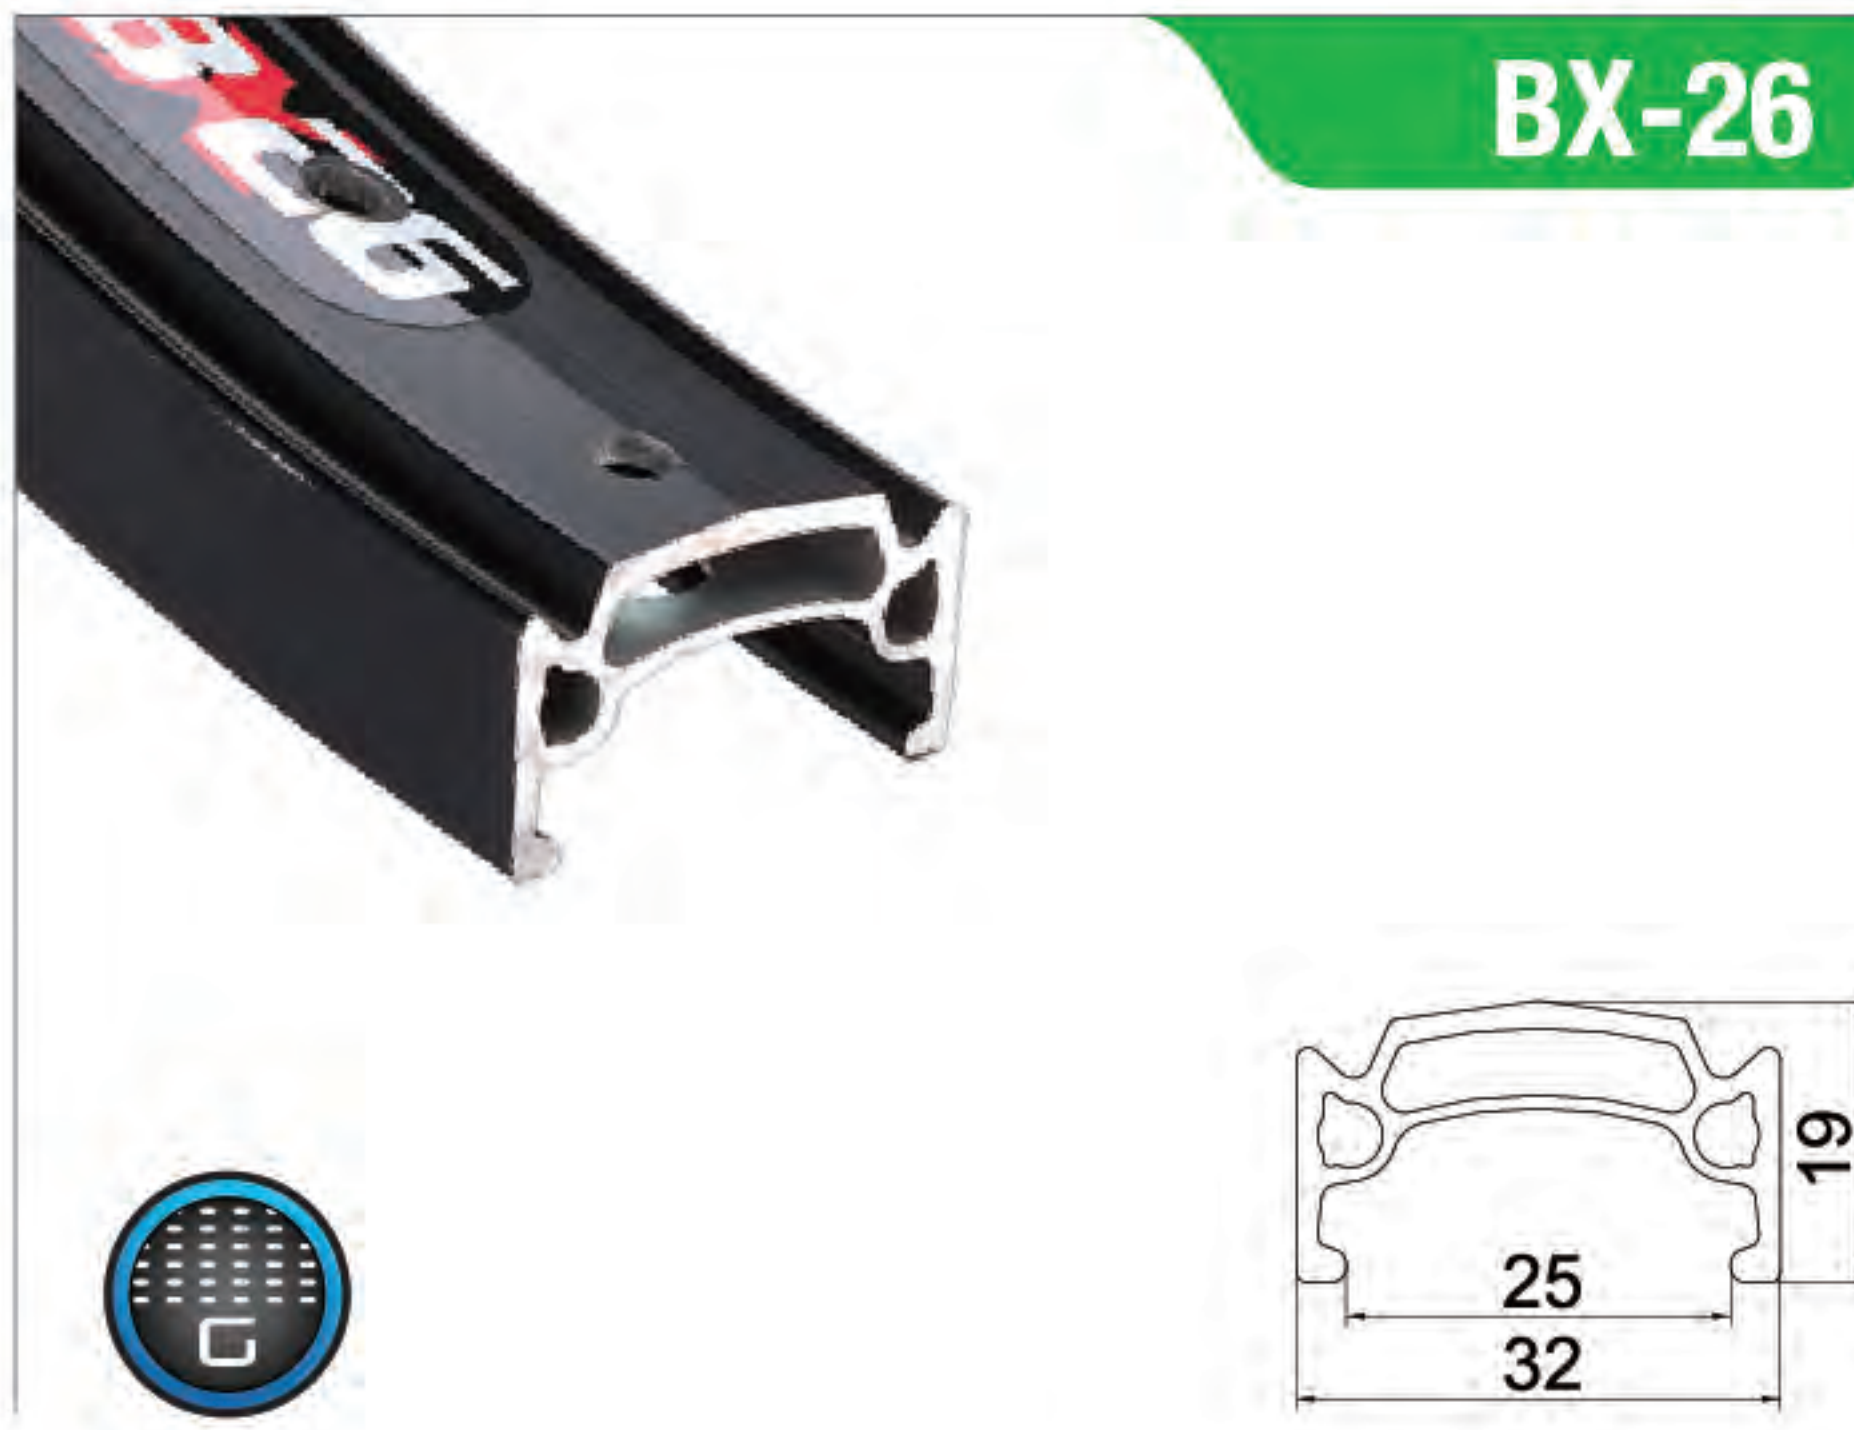

Size	Weight(g)	ERD(mm)
20"(406-25)	485	384

Holes: 32H/36H/48H
Option: GSW
Joint: Pinned

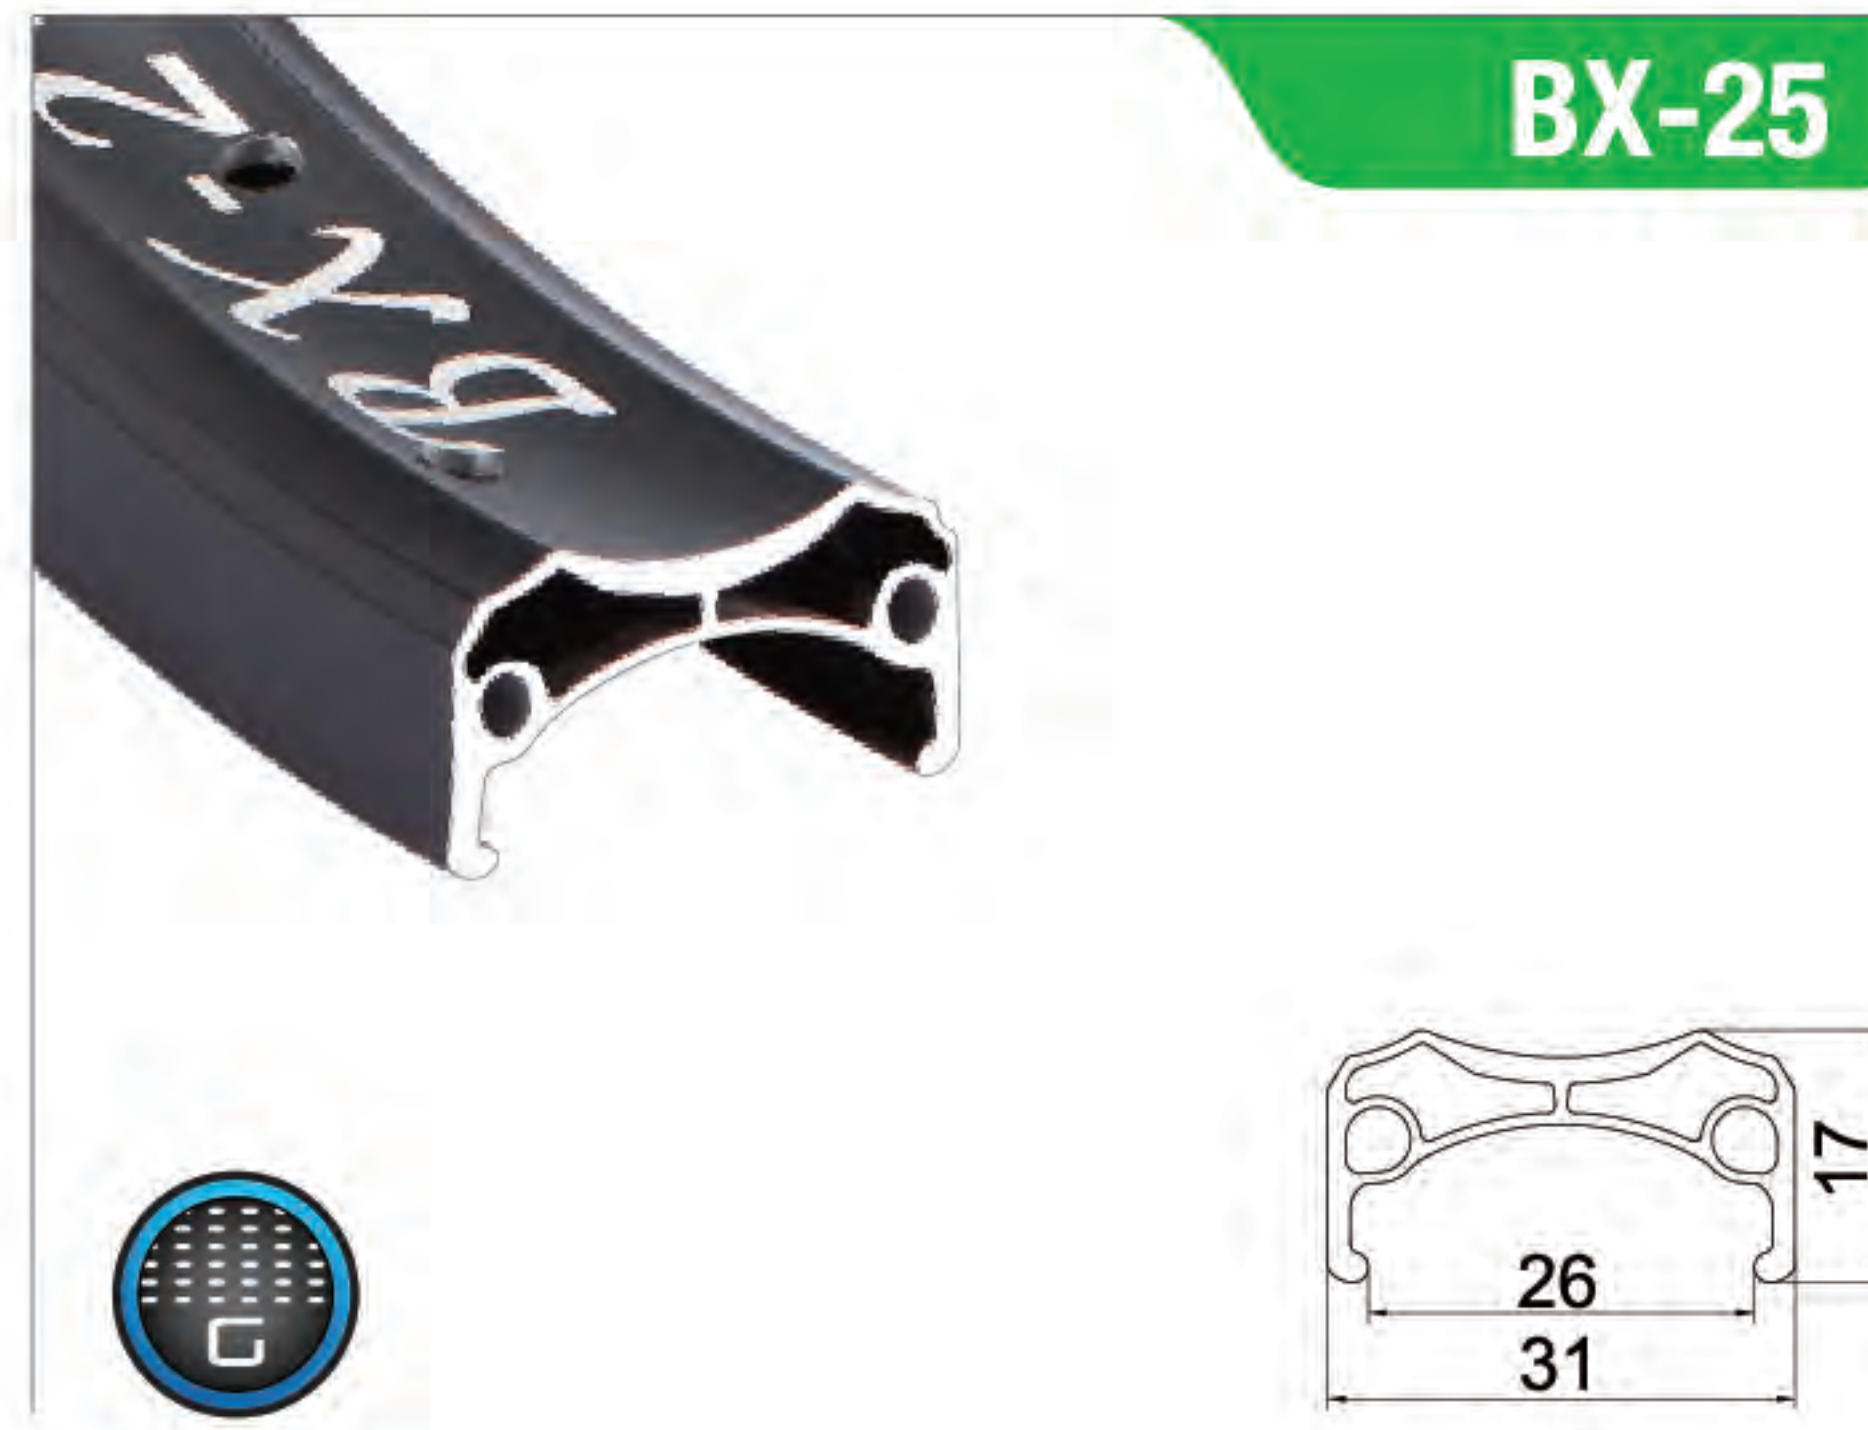


Size	Weight(g)	ERD(mm)
20"(406-26)	403	389

Holes: 28H/32H/36H/48H
Option: GSW
Joint: Pinned




Size	Weight(g)	ERD(mm)
20"(406-25)	441	390

Holes: 32H/36H/48H
Option: GSW
Joint: Welded

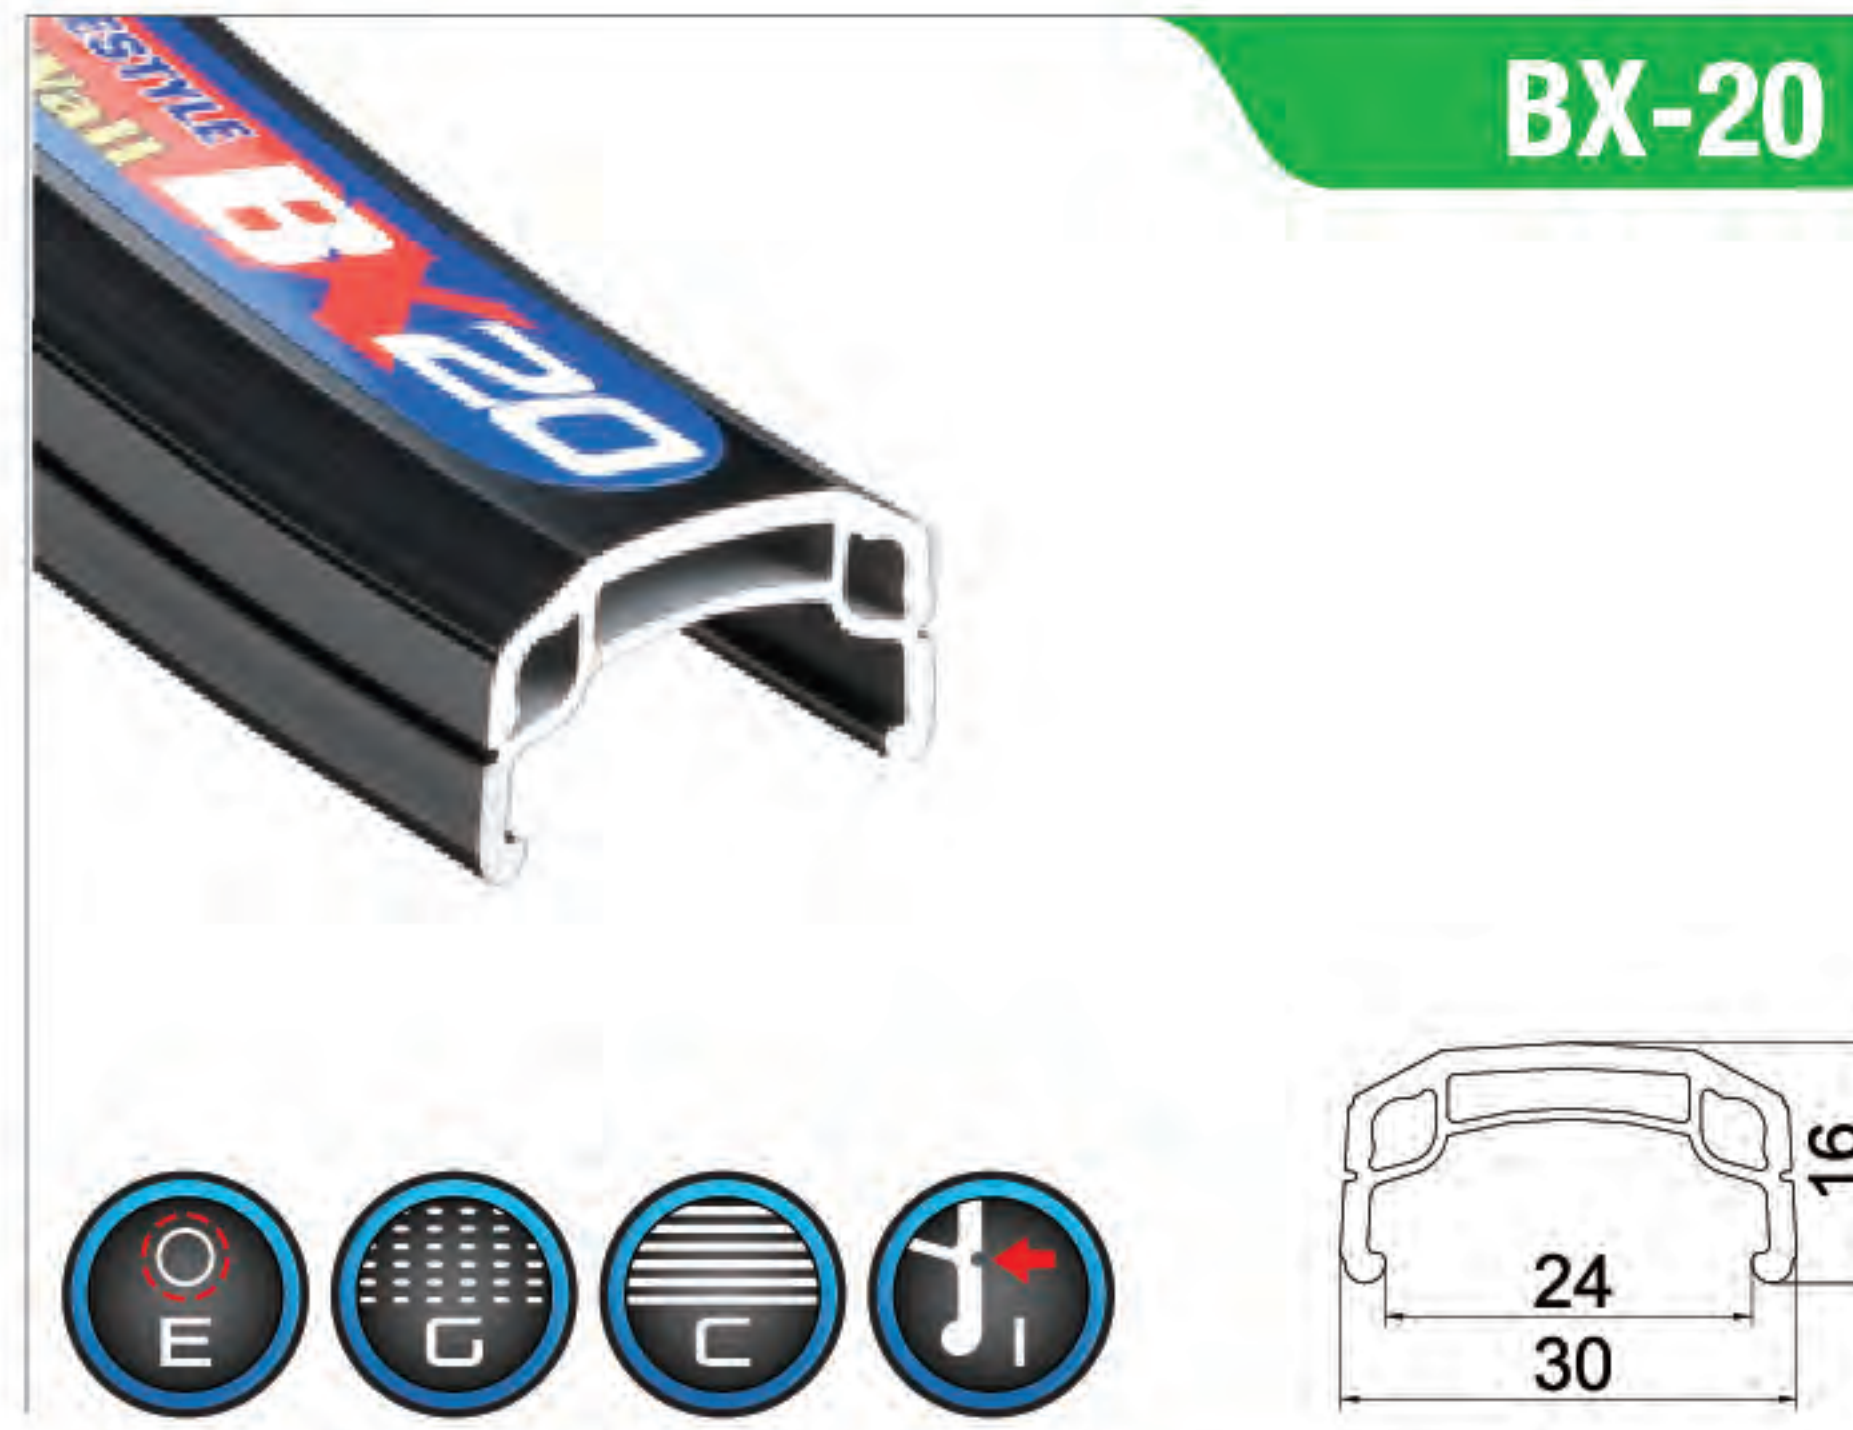

Size	Weight(g)	ERD(mm)
26"(559-24)	530	544
24"(507-24)	480	492
20"(406-24)	385	390
16"(305-24)	290	290

Holes: 20H/28H/32H/36H/48H
Option: Eyelets/GSW/CSW
Joint: Pinned

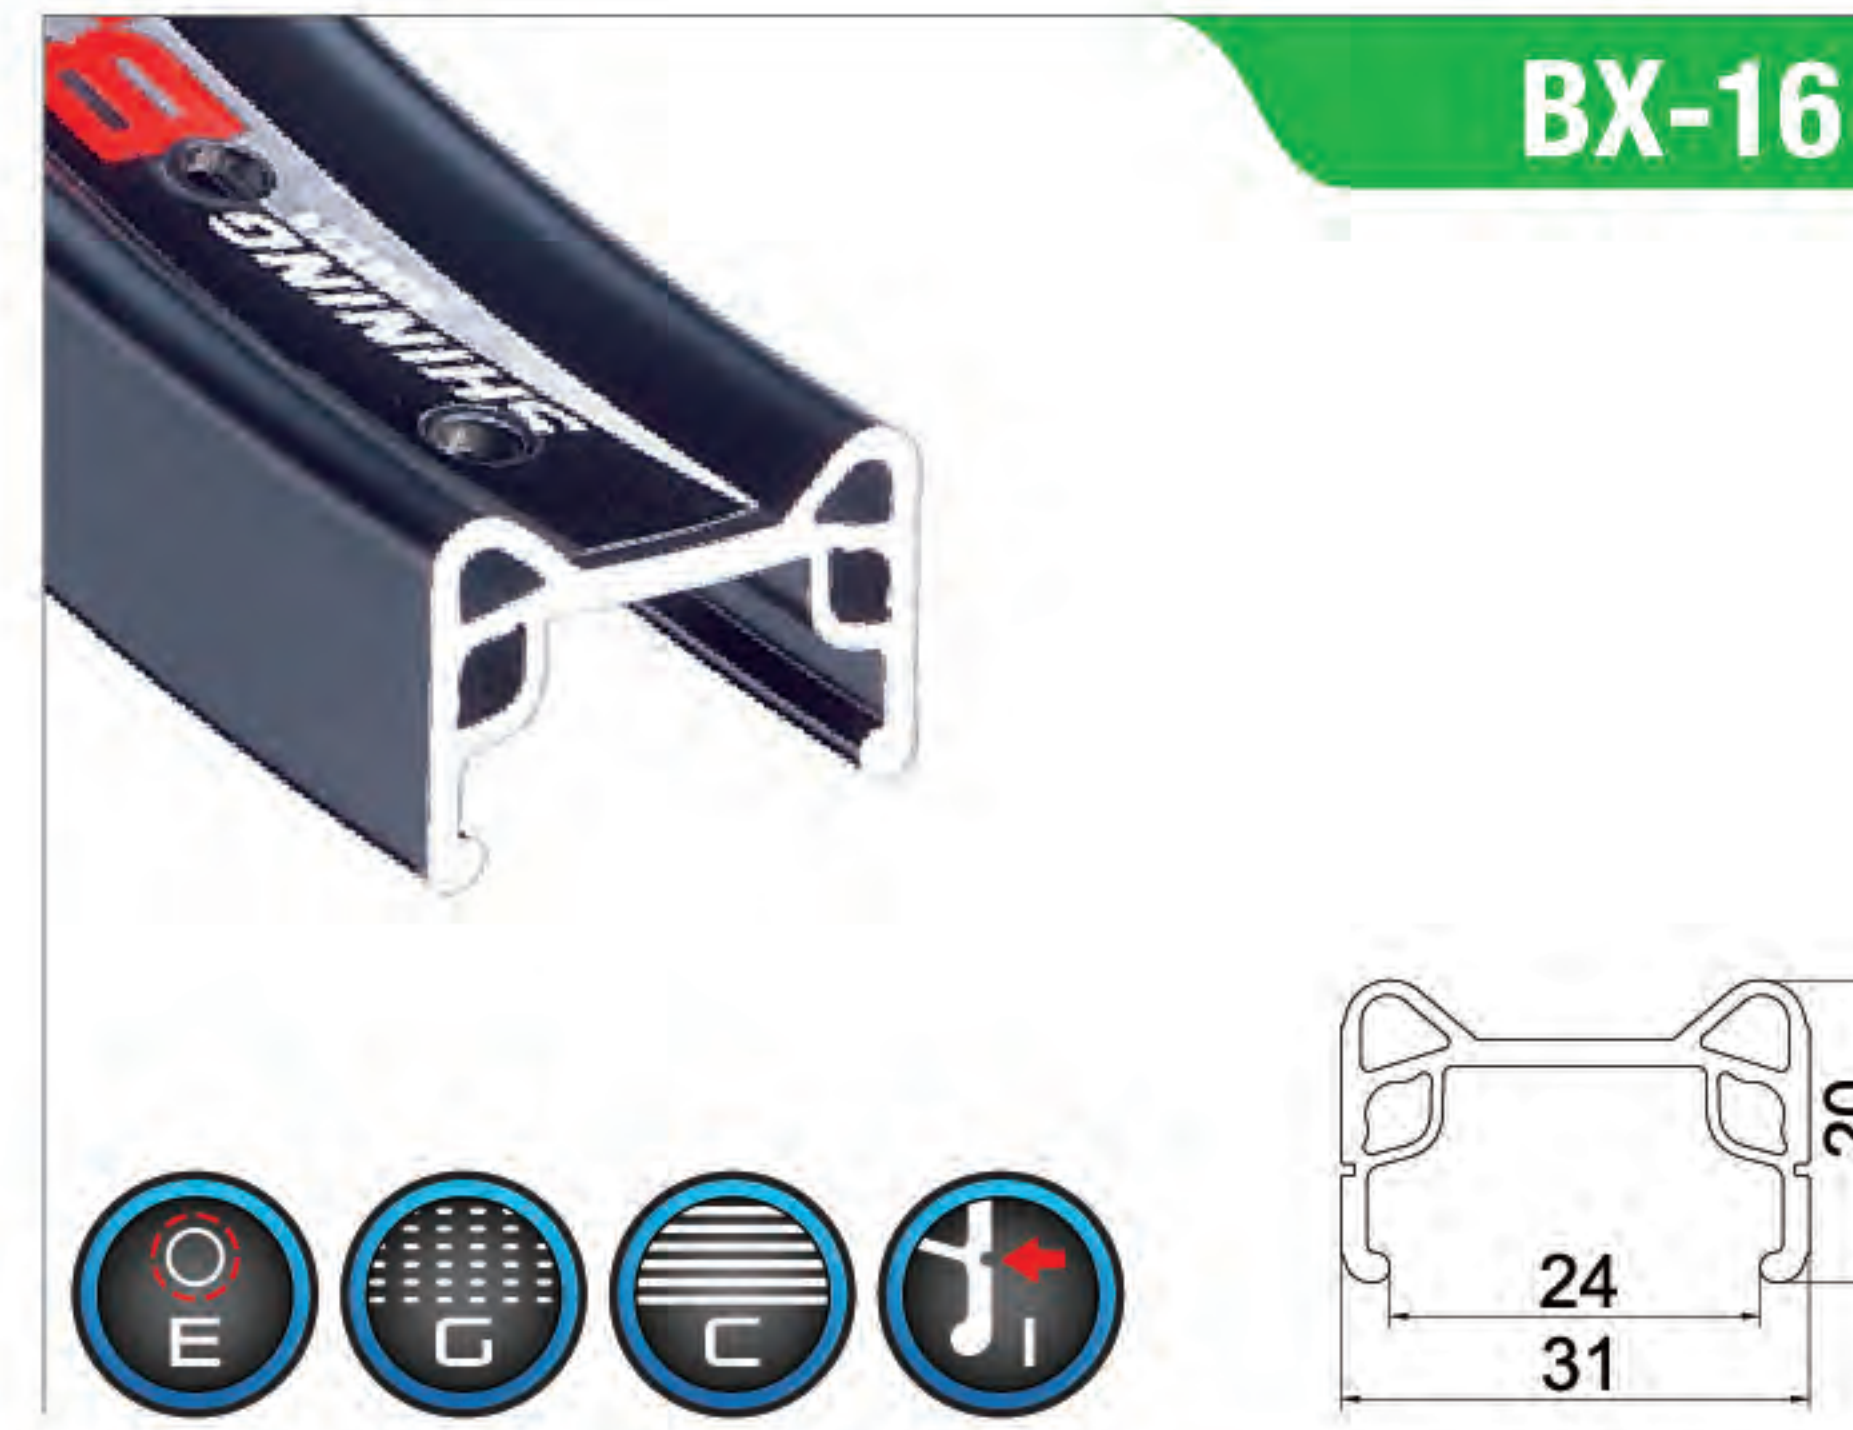


Size	Weight(g)	ERD(mm)
20"(406-24)	445	390

Holes: 28H/32H/36H/48H
Option: Eyelets/GSW/CSW
Joint: Pinned



BX-15

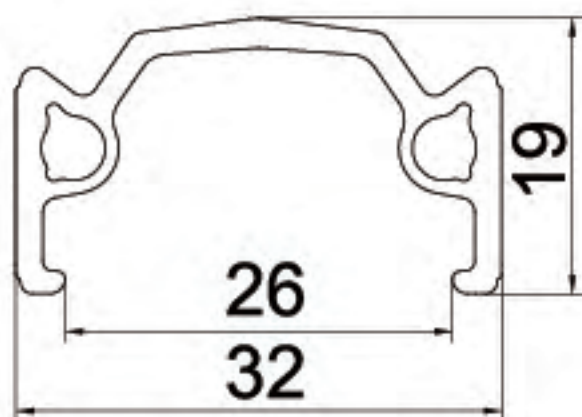


Size	Weight(g)	ERD(mm)
20"(406-26)	450	384

Holes: 28H/36H/48H
Option: GSW/CSW
Joint: Pinned



BX-14

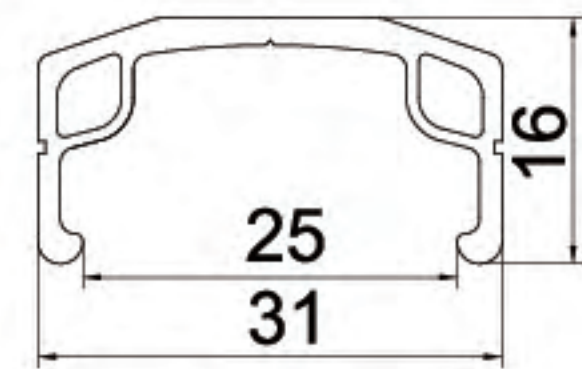

Size	Weight(g)	ERD(mm)
24"(507-25)	462	492
22"(457-25)	417	442
20"(406-25)	370	390
16"(305-25)	280	290

Holes: 20H/28H/32H/36H/48H
Option: Eyelets/GSW/CSW
Joint: Pinned



OVERVIEW

Joining methods



SLEEVED JOINT



WELDED JOINT



ASYMMETRIC

Processing options



EYELETS



GROUND
SIDEWALLS



CNC
SIDEWALLS



SAFETY
LINE



DIMPLE



REDUCE WEIGHT
HOLES

Material



ZIRCONM
ALLOY

Back

Road Racing	1~4
Downhill	4~8
BMX & Freestyle	8~11

Next


Fat Bike	13
ATB/MTB/Trekking	14~19
Single Wall	19~21
Steel Rim	22
Spokes and Nipples	22
Motorcycle Rim	23~24



FAT BIKE



SB-100

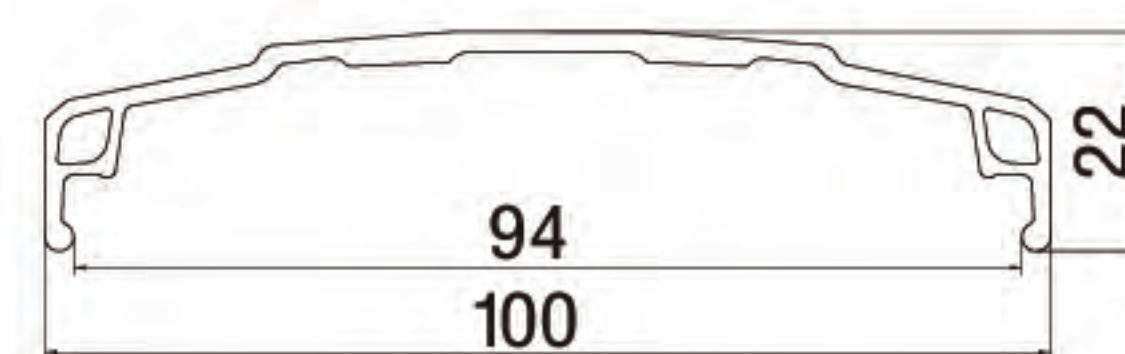


Size	Weight(g)	ERD(mm)
26"(559-94)	1170	536

Holes: 32H
Option: Eyelets/Reduce Weight Holes
Joint: Pinned



SB-90

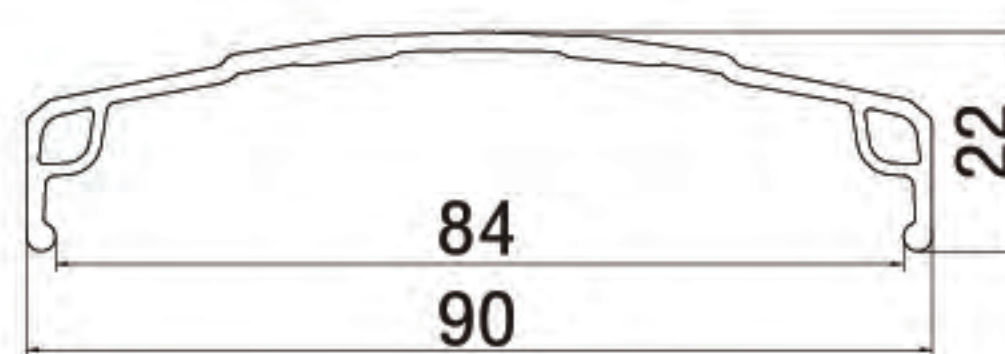


Size	Weight(g)	ERD(mm)
26"(559-84)	918	535

Holes: 32H/36H
Option: Eyelets/Reduce Weight Holes
Joint: Pinned



SB-80

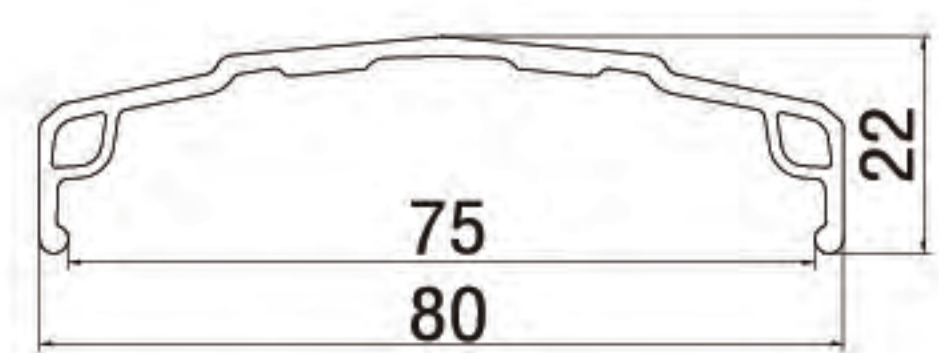


Size	Weight(g)	ERD(mm)
26"(559-75)	900	536
24"(507-75)	880	484
20"(406-75)	710	383

Holes: 32H/36H
Option: Eyelets/Reduce Weight Holes
Joint: Pinned



SB-60

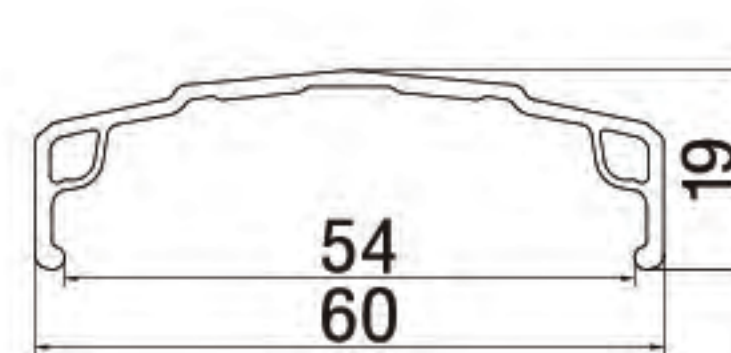


Size	Weight(g)	ERD(mm)
24"(507-54)	549	488
20"(406-54)	476	387

Holes: 32H
Option: Reduce Weight Holes
Joint: Pinned



MP-80

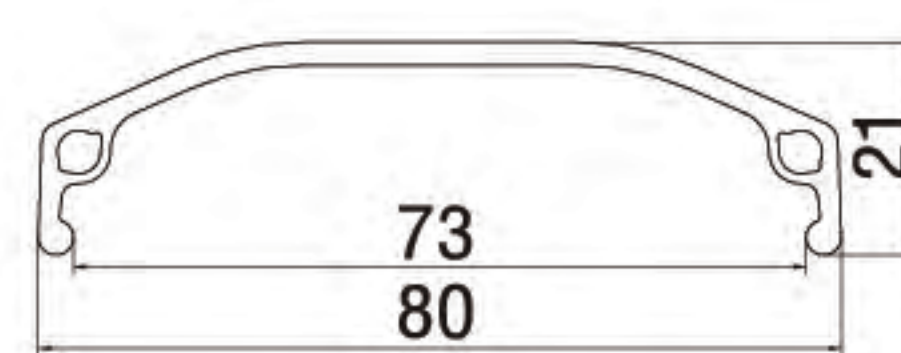


Size	Weight(g)	ERD(mm)
26"(559-73)	890	535
20"(406-73)	700	382

Holes: 32H/36H
Option: Eyelets/Reduce Weight Holes
Joint: Pinned

ATB MTB Trekking



AS-T35

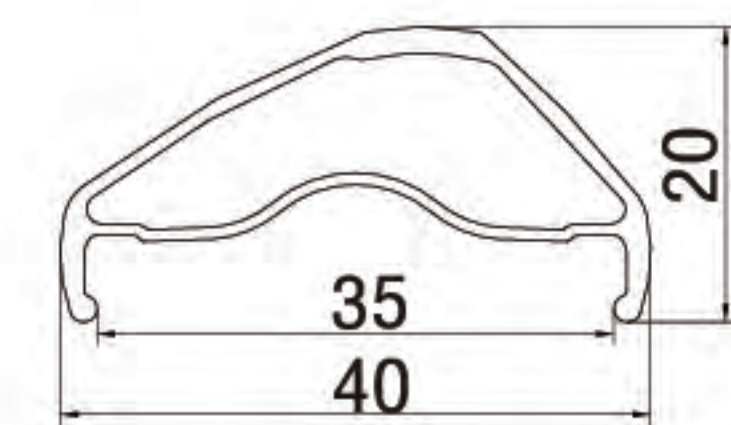


Size	Weight(g)	ERD(mm)
29"(622-35)	571	597
27.5"(584-35)	542	559

Holes: 32H
Option:
Joint: Sleeved



AS-T30

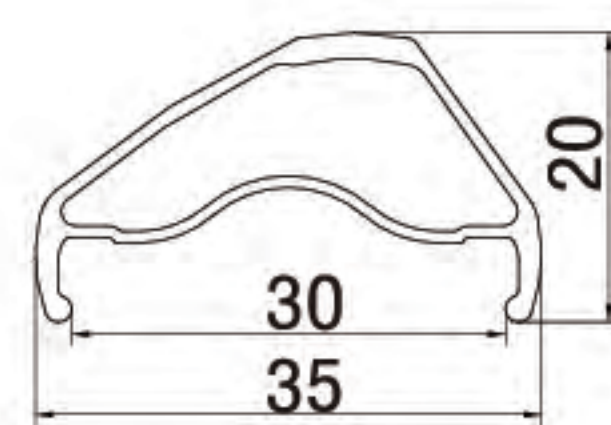


Size	Weight(g)	ERD(mm)
29"(622-30)	529	597
27.5"(584-30)	486	559

Holes: 32H
Option:
Joint: Sleeved



A-X240

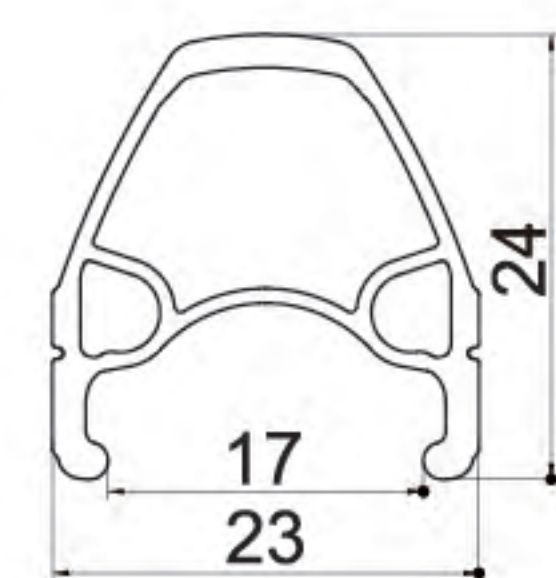


Size	Weight(g)	ERD(mm)
700C(622-17)	554	589

Holes: 24H/28H/32H/36H
Option: Eyelets/GSW/CSW
Joint: Pinned



AS-35P

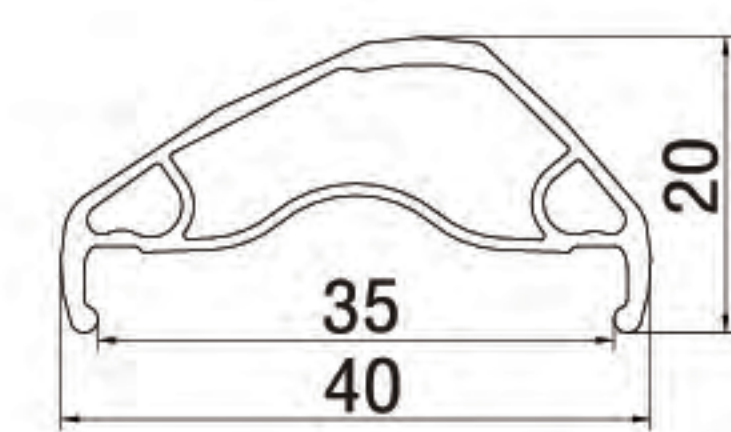


Size	Weight(g)	ERD(mm)
27.5"(584-35)	599	559

Holes: 32H
Option:
Joint: Pinned



AS-30P

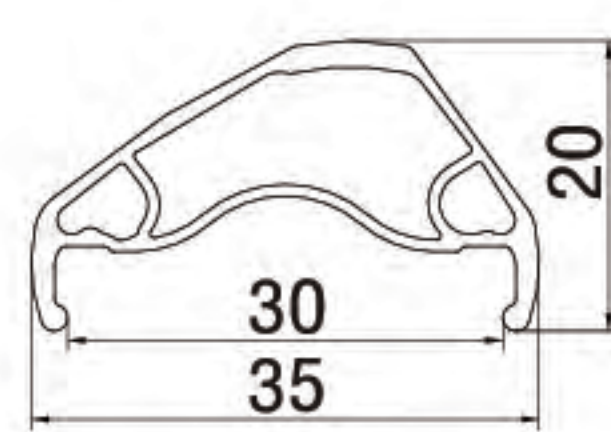


Size	Weight(g)	ERD(mm)
29"(622-30)	594	597
27.5"(584-30)	540	559

Holes: 32H
Option:
Joint: Pinned




Size	Weight(g)	ERD(mm)
700C(622-19)	590	579

Holes: 28H/32H
Option:
Joint: Pinned

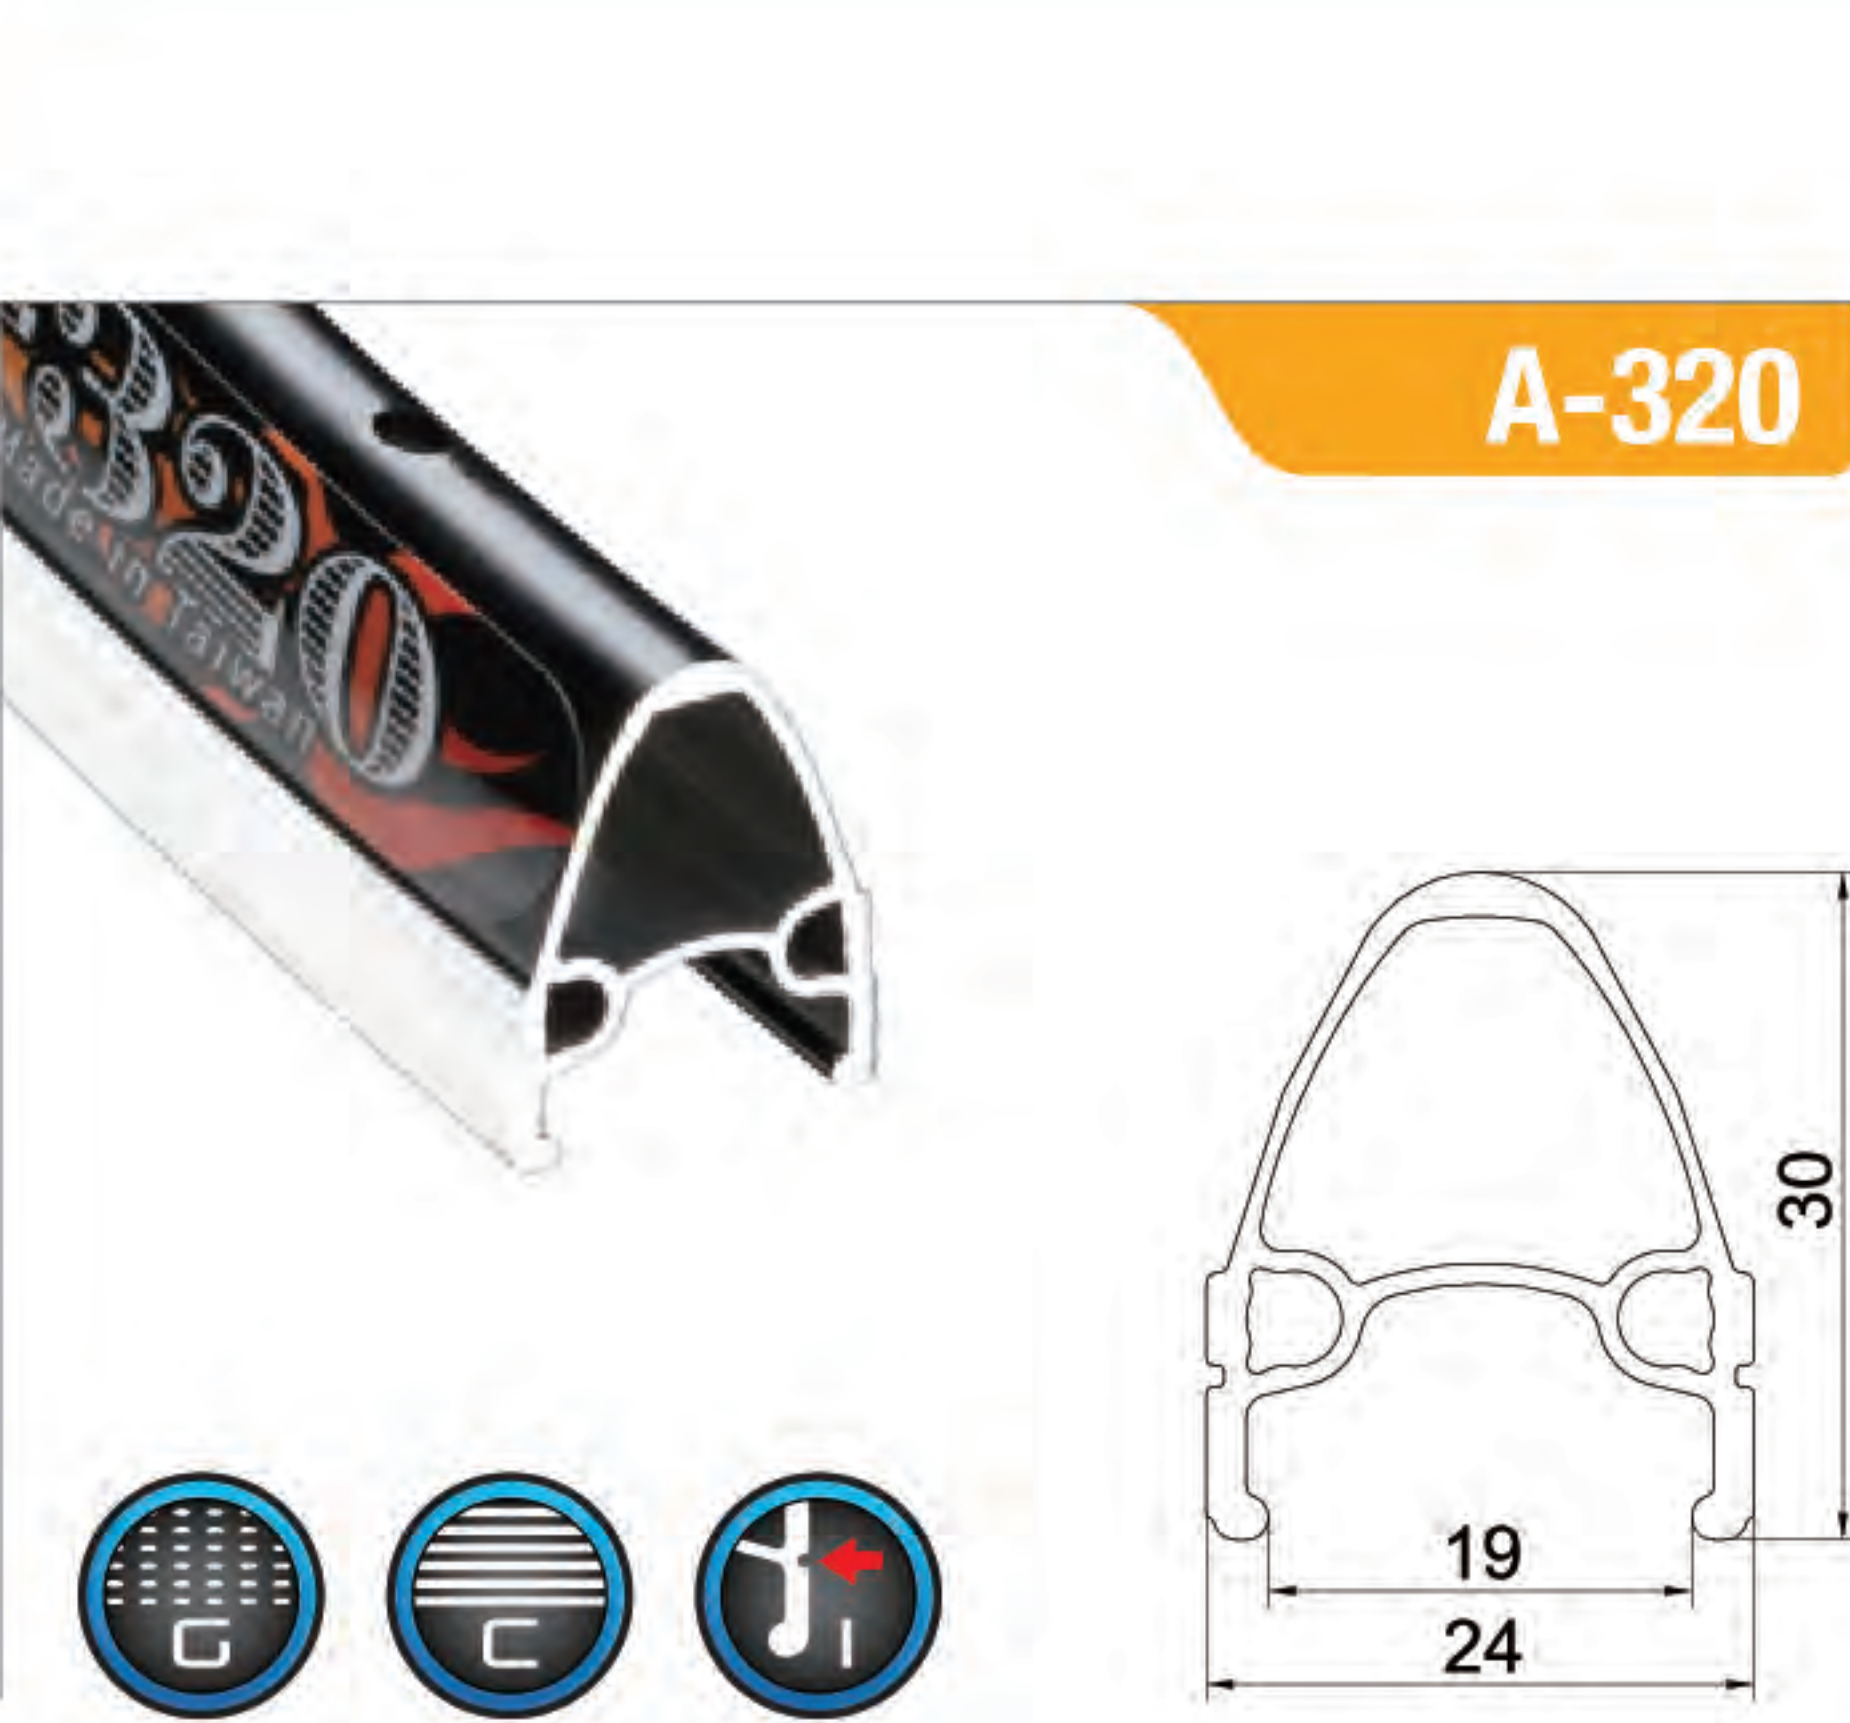

Size	Weight(g)	ERD(mm)
700C(622-19)	650	578
26"(559-19)	580	515
24"(507-19)	530	464
20"(406-19)	425	362

Holes: 28H/32H/36H
Option: GSW/CSW
Joint: Pinned

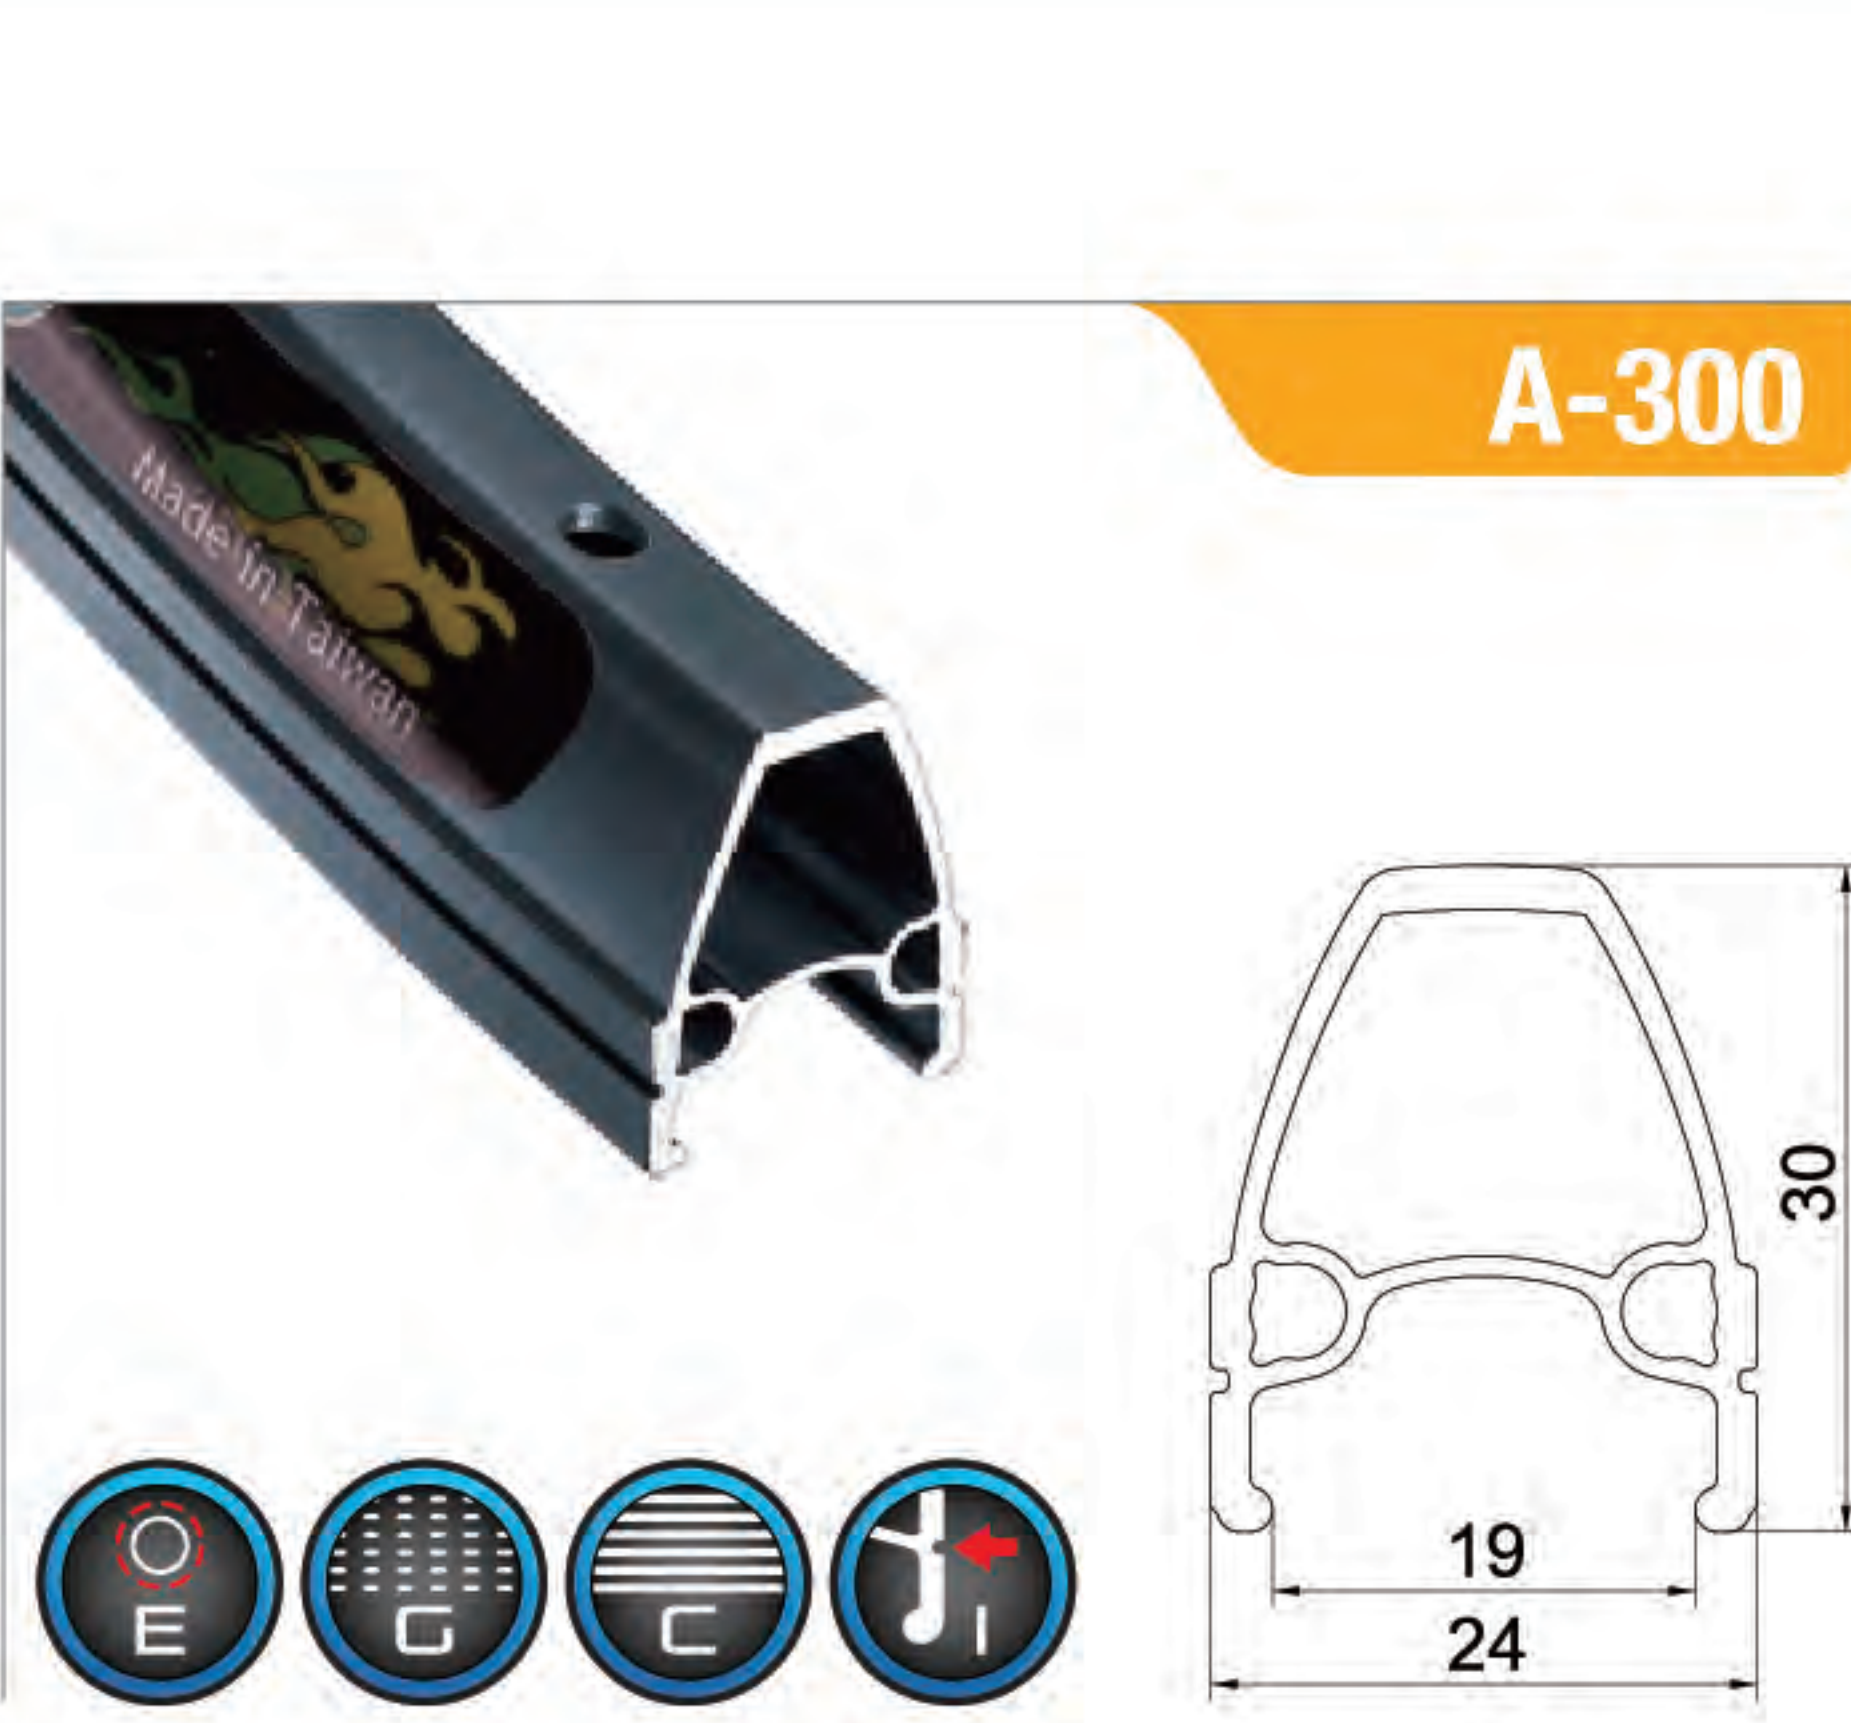

Size	Weight(g)	ERD(mm)
700C(622-19)	733	578
26"(559-19)	652	515

Holes: 28H/32H/36H
Option: Eyelets/GSW/CSW
Joint: Pinned



Size	Weight(g)	ERD(mm)
700C(622-20)	429	595

Holes: 24H/28H/32H/36H
Option:
Joint: Sleeved



Size	Weight(g)	ERD(mm)
700C(622-20)	482	595

Holes: 32H
Option:
Joint: Pinned



Size	Weight(g)	ERD(mm)
29"(622-23)	518	604
27.5"(584-23)	489	566

Holes: 28H/32H/36H
Option: Eyelets
Joint: Pinned



Size	Weight(g)	ERD(mm)
700C(622-17)	524	585

Holes: 24H/28H/32H/36H
Option: GSW/CSW
Joint: Sleeved



Size	Weight(g)	ERD(mm)
700C(622-17)	589	585

Holes: 20H/24H/28H/32H/36H
Option: GSW/CSW
Joint: Pinned



Size	Weight(g)	ERD(mm)
700C(622-18)	581	583

Holes: 20H/24H/28H/32H/36H
Option:
Joint: Pinned



Size	Weight(g)	ERD(mm)
29"(622-19)	460	604
27.5"(584-19)	431	566

Holes: 28H/32H/36H
Option: Eyelets
Joint: Pinned



Size	Weight(g)	ERD(mm)
700C(622-20)	680	586
26"(559-20)	610	524

Holes: 32H/36H
Option: GSW/CSW
Joint: Pinned




Size	Weight(g)	ERD(mm)
700C(622-16)	530	596
26"(559-16)	475	534
24"(507-16)	430	482
20"x1 1/8(451-16)	385	425
20"(406-16)	345	380
16"x1 3/8(349-16)	305	325
16"(305-16)	301	282

Holes: 14H/20H/21H/24H/28H/32H/36H
Option: GSW/CSW
Joint: Pinned



Size	Weight(g)	ERD(mm)
700C(622-14)	495	594
24"x1 3/8(540-14)	422	512
20"x1 1/8(451-14)	360	421

Holes: 20H/24H/28H/32H/36H
Option: GSW/CSW
Joint: Pinned

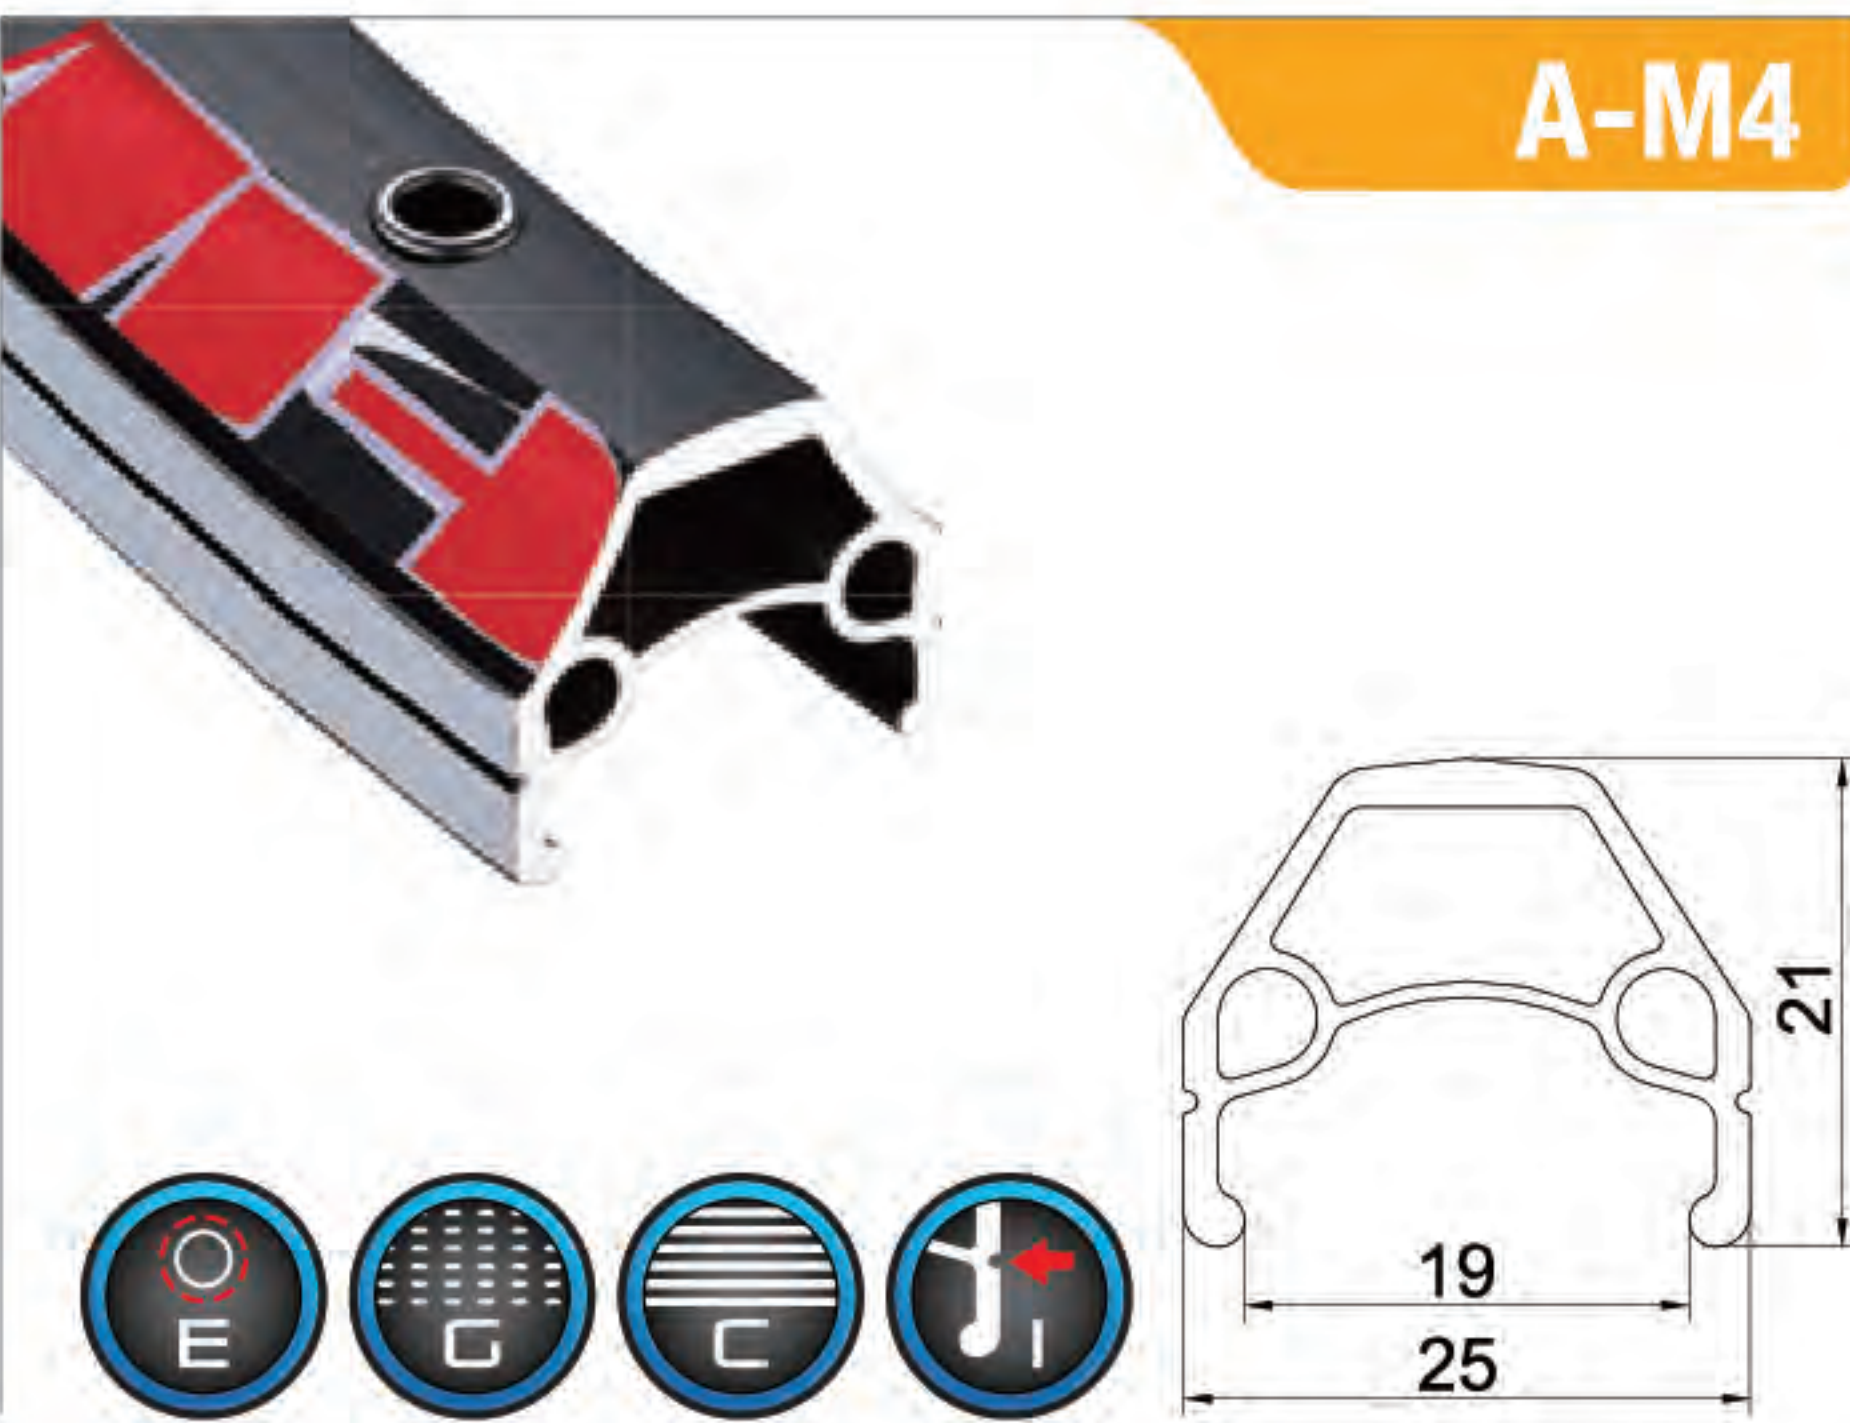

Size	Weight(g)	ERD(mm)
29er/700C(622-19)	545	596
26"(559-19)	495	534
24"(507-19)	445	482
20"(406-19)	360	380

Holes: 20H/24H/28H/32H/36H
Option: Eyelets/GSW/CSW
Joint: Pinned




Size	Weight(g)	ERD(mm)
700C(622-19)	585	588
26"(559-19)	525	526
24"(507-19)	475	474
22"(457-19)	440	424
20"(406-19)	385	372

Holes: 20H/24H/28H/32H/36H
Option: GSW/CSW
Joint: Pinned




Size	Weight(g)	ERD(mm)
700C(622-19)	580	596
26"(559-19)	525	535
24"(507-19)	475	482
20"(406-19)	380	380
16"(305-19)	285	280

Holes: 20H/24H/28H/32H/36H
Option: GSW/CSW
Joint: Pinned

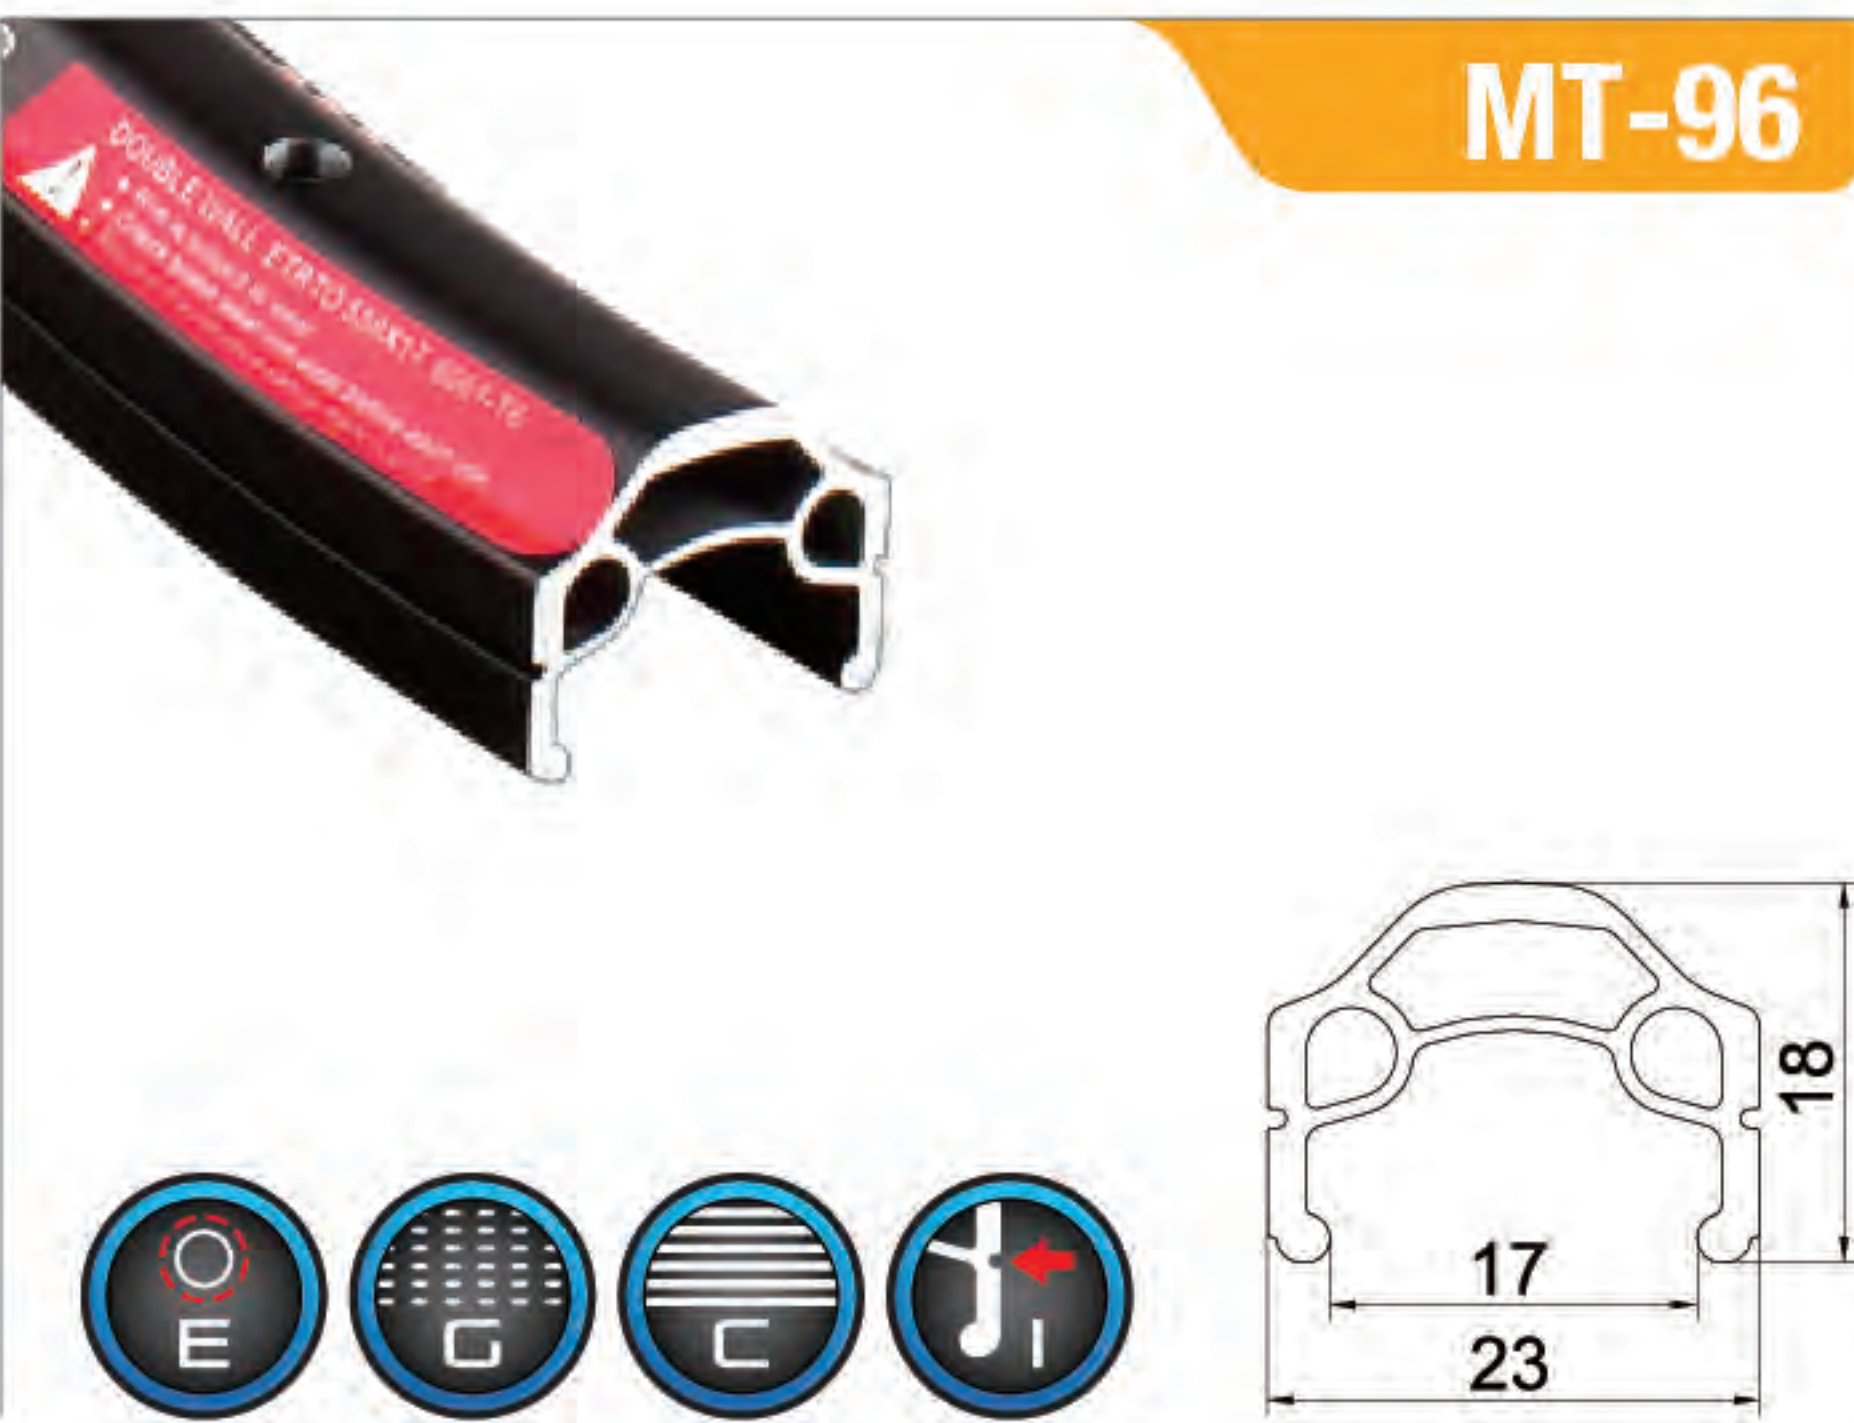

Size	Weight(g)	ERD(mm)
700C(622-17)	515	602
26"x1 3/8(590-17)	490	571
26"(559-17)	465	540
24"(507-17)	420	488
20"x1 3/8(451-17)	374	431
20"(406-17)	340	386
18"(355-17)	300	335
17"x1 1/4(369-17)	303	350
16"x1 3/8(349-17)	295	330
16"(305-17)	255	286

Holes: 20H/24H/28H/32H/36H
Option: Eyelets/GSW/CSW
Joint: Pinned

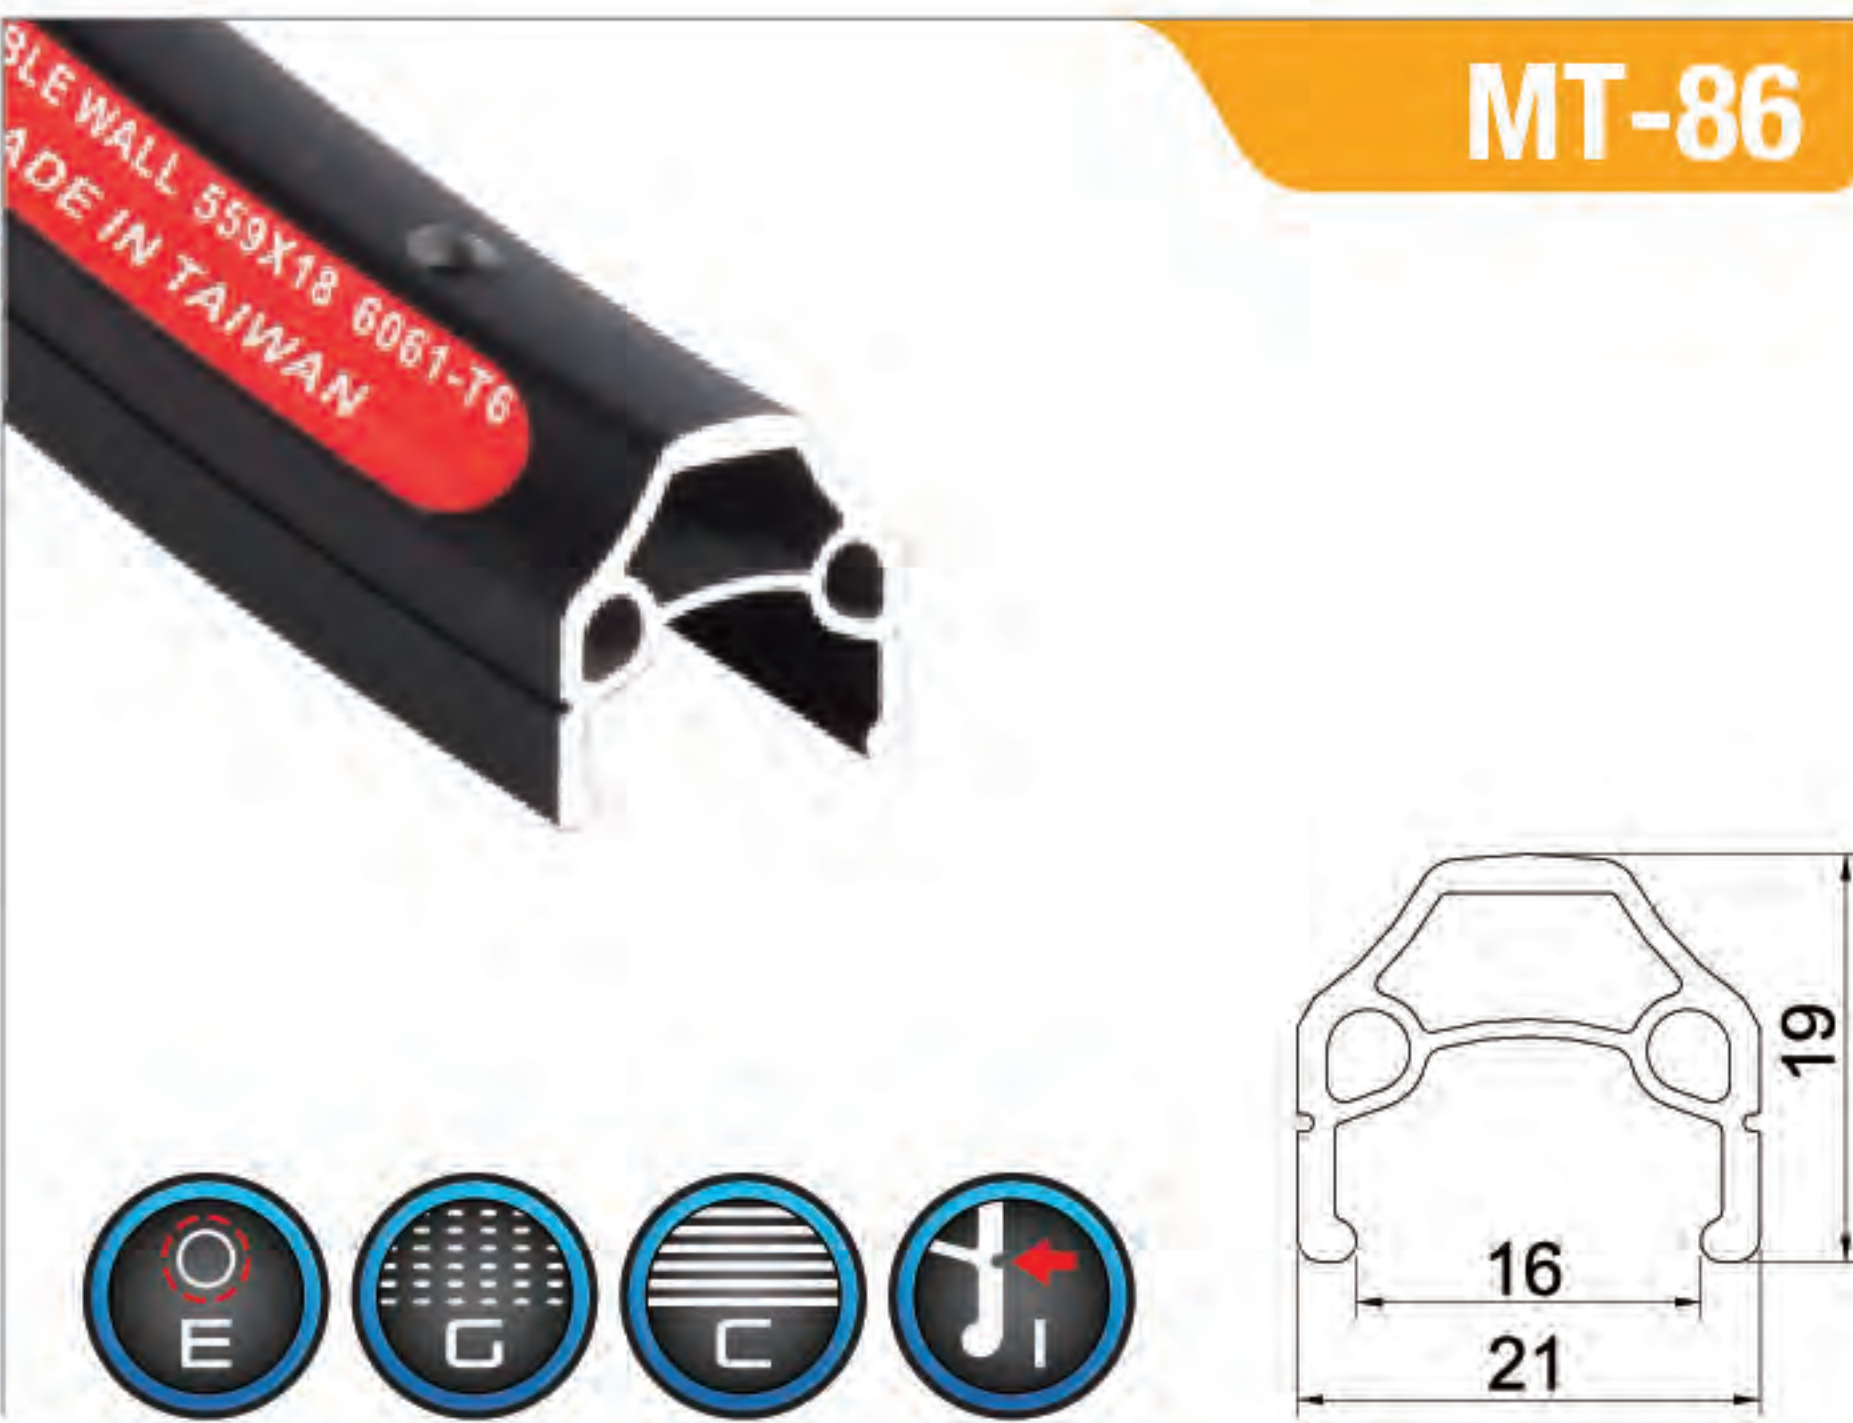


Size	Weight(g)	ERD(mm)
700C(622-16)	490	600
26"(559-16)	440	538
20"(406-16)	325	384

Holes: 20H/24H/28H/32H/36H
Option: Eyelets/GSW/CSW
Joint: Pinned




Size	Weight(g)	ERD(mm)
29er/700C(622-23)	650	598
26"(559-23)	585	536

Holes: 32H/36H/48H
Option: Eyelets/GSW/CSW
Joint: Pinned

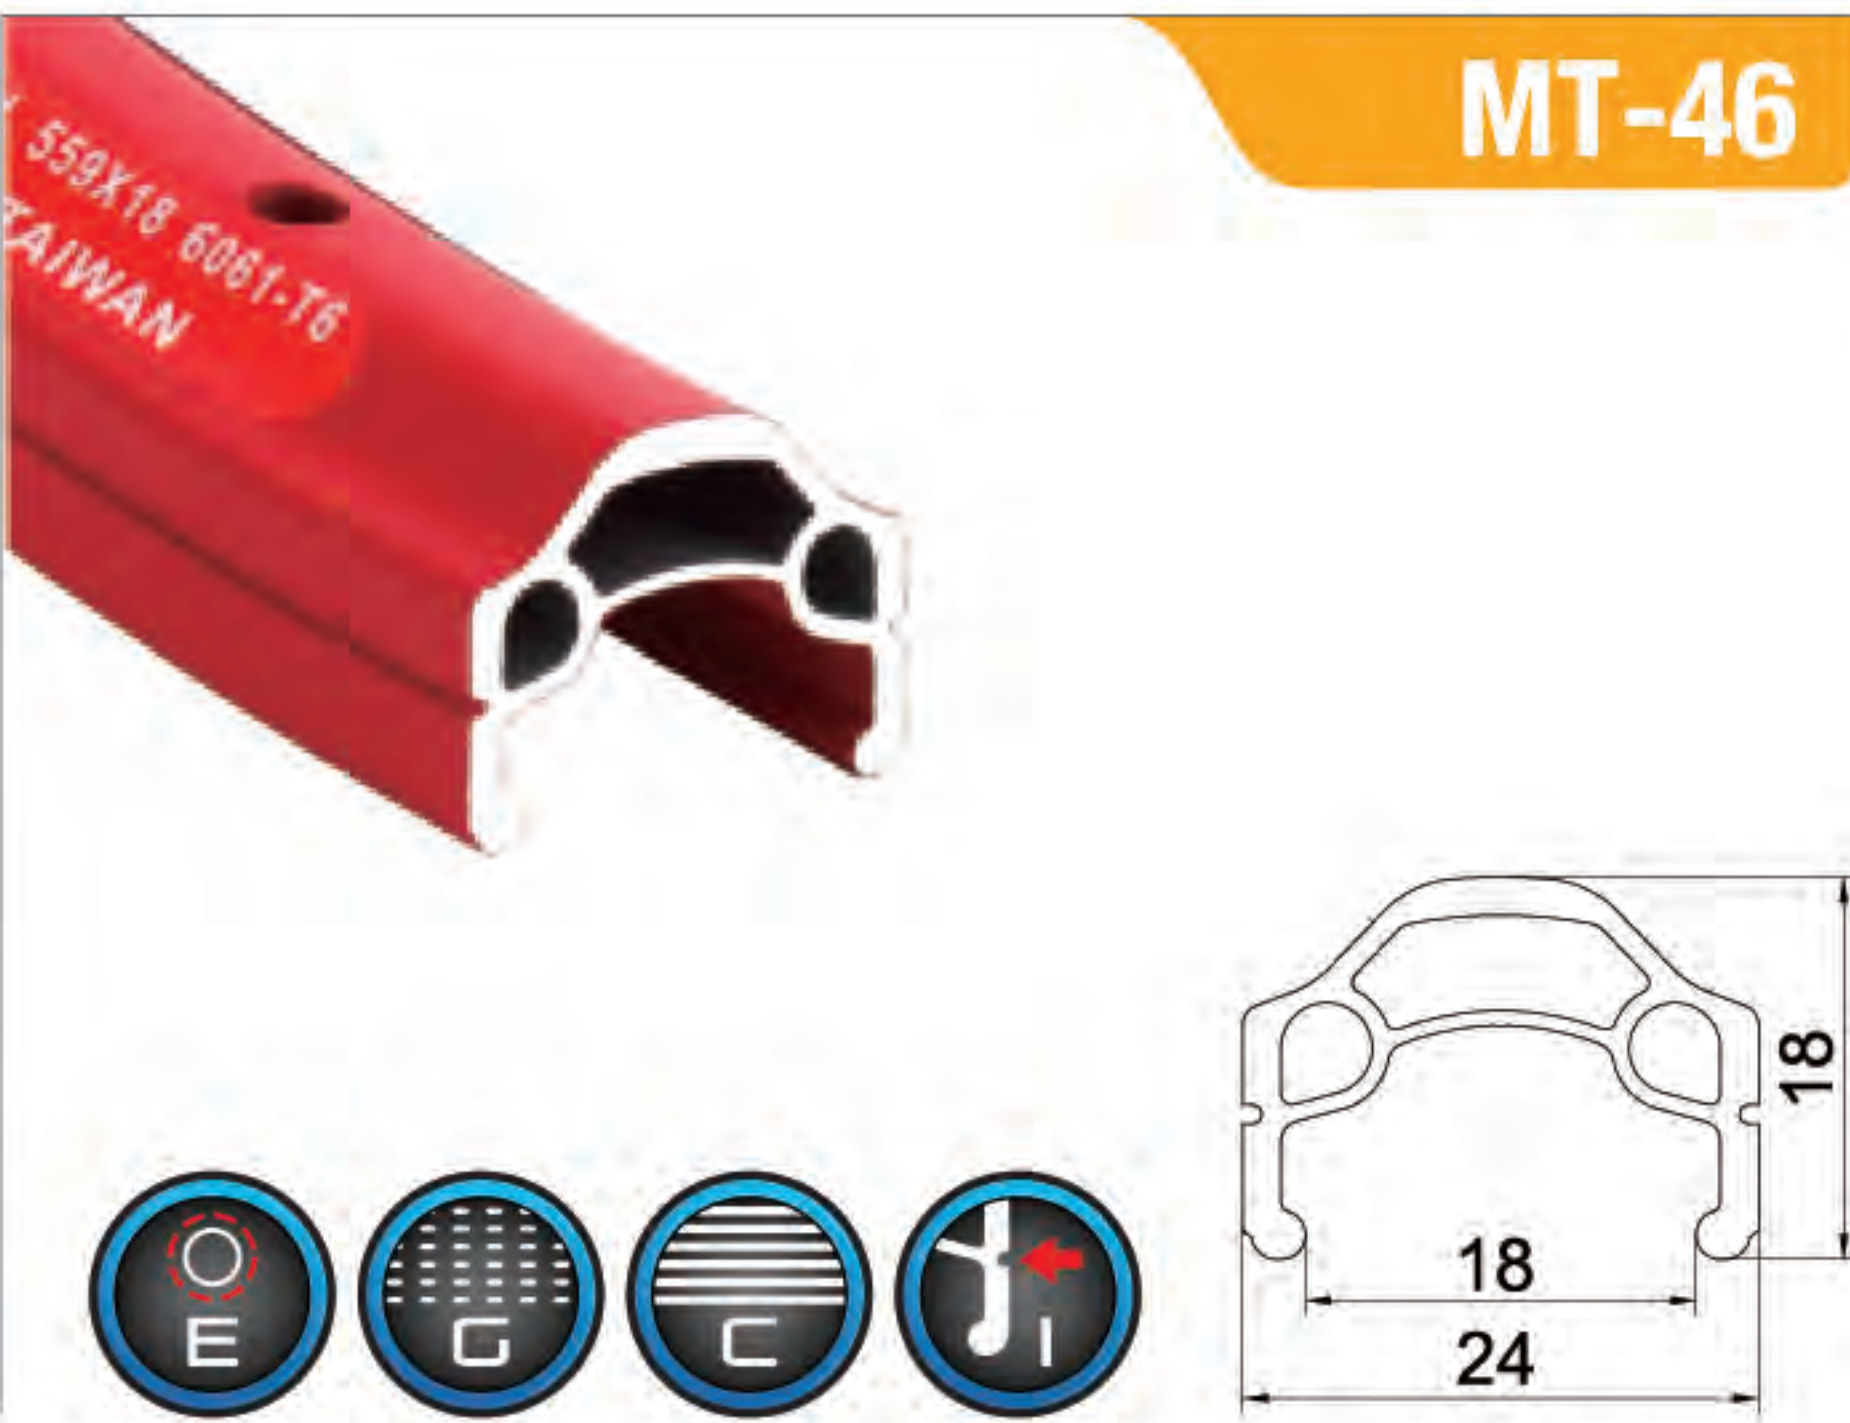


Size	Weight(g)	ERD(mm)
28"(635-18)	537	616
29er/700C(622-18)	520	602
27.5"(584-18)	485	565
26"(559-18)	465	540
24"x1(520-18)	437	501
24"(507-18)	425	488
20"(406-18)	340	386

Holes: 20H/24H/28H/32H/36H
Option: Eyelets/GSW/CSW
Joint: Pinned

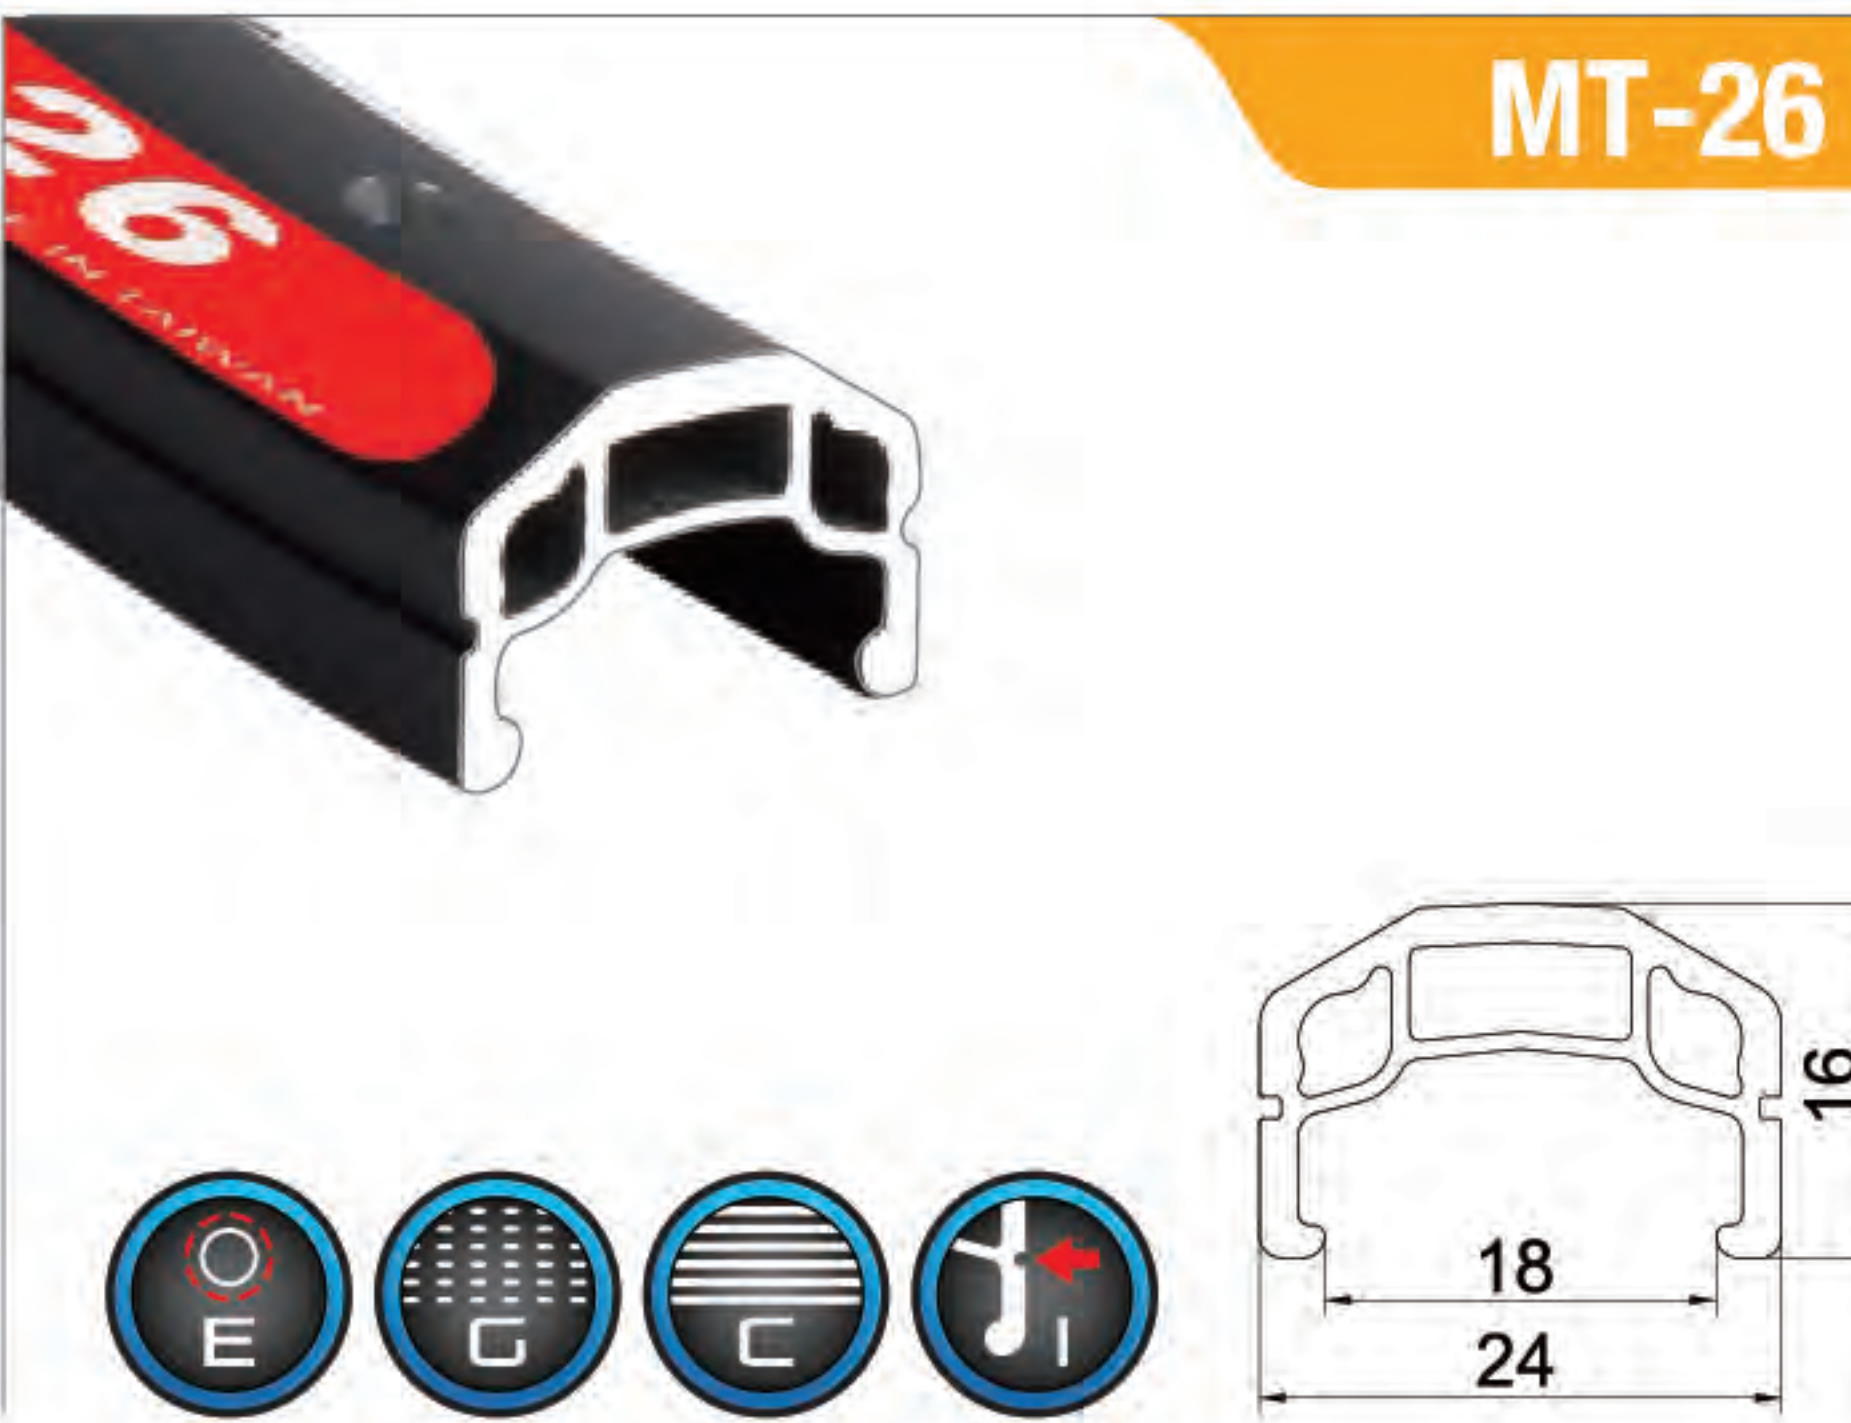


Size	Weight(g)	ERD(mm)
700C(622-18)	515	608
26"(559-18)	465	546
24"(507-18)	420	494
20"(406-18)	335	392

Holes: 20H/24H/28H/32H/36H
Option: Eyelets/GSW/CSW
Joint: Pinned

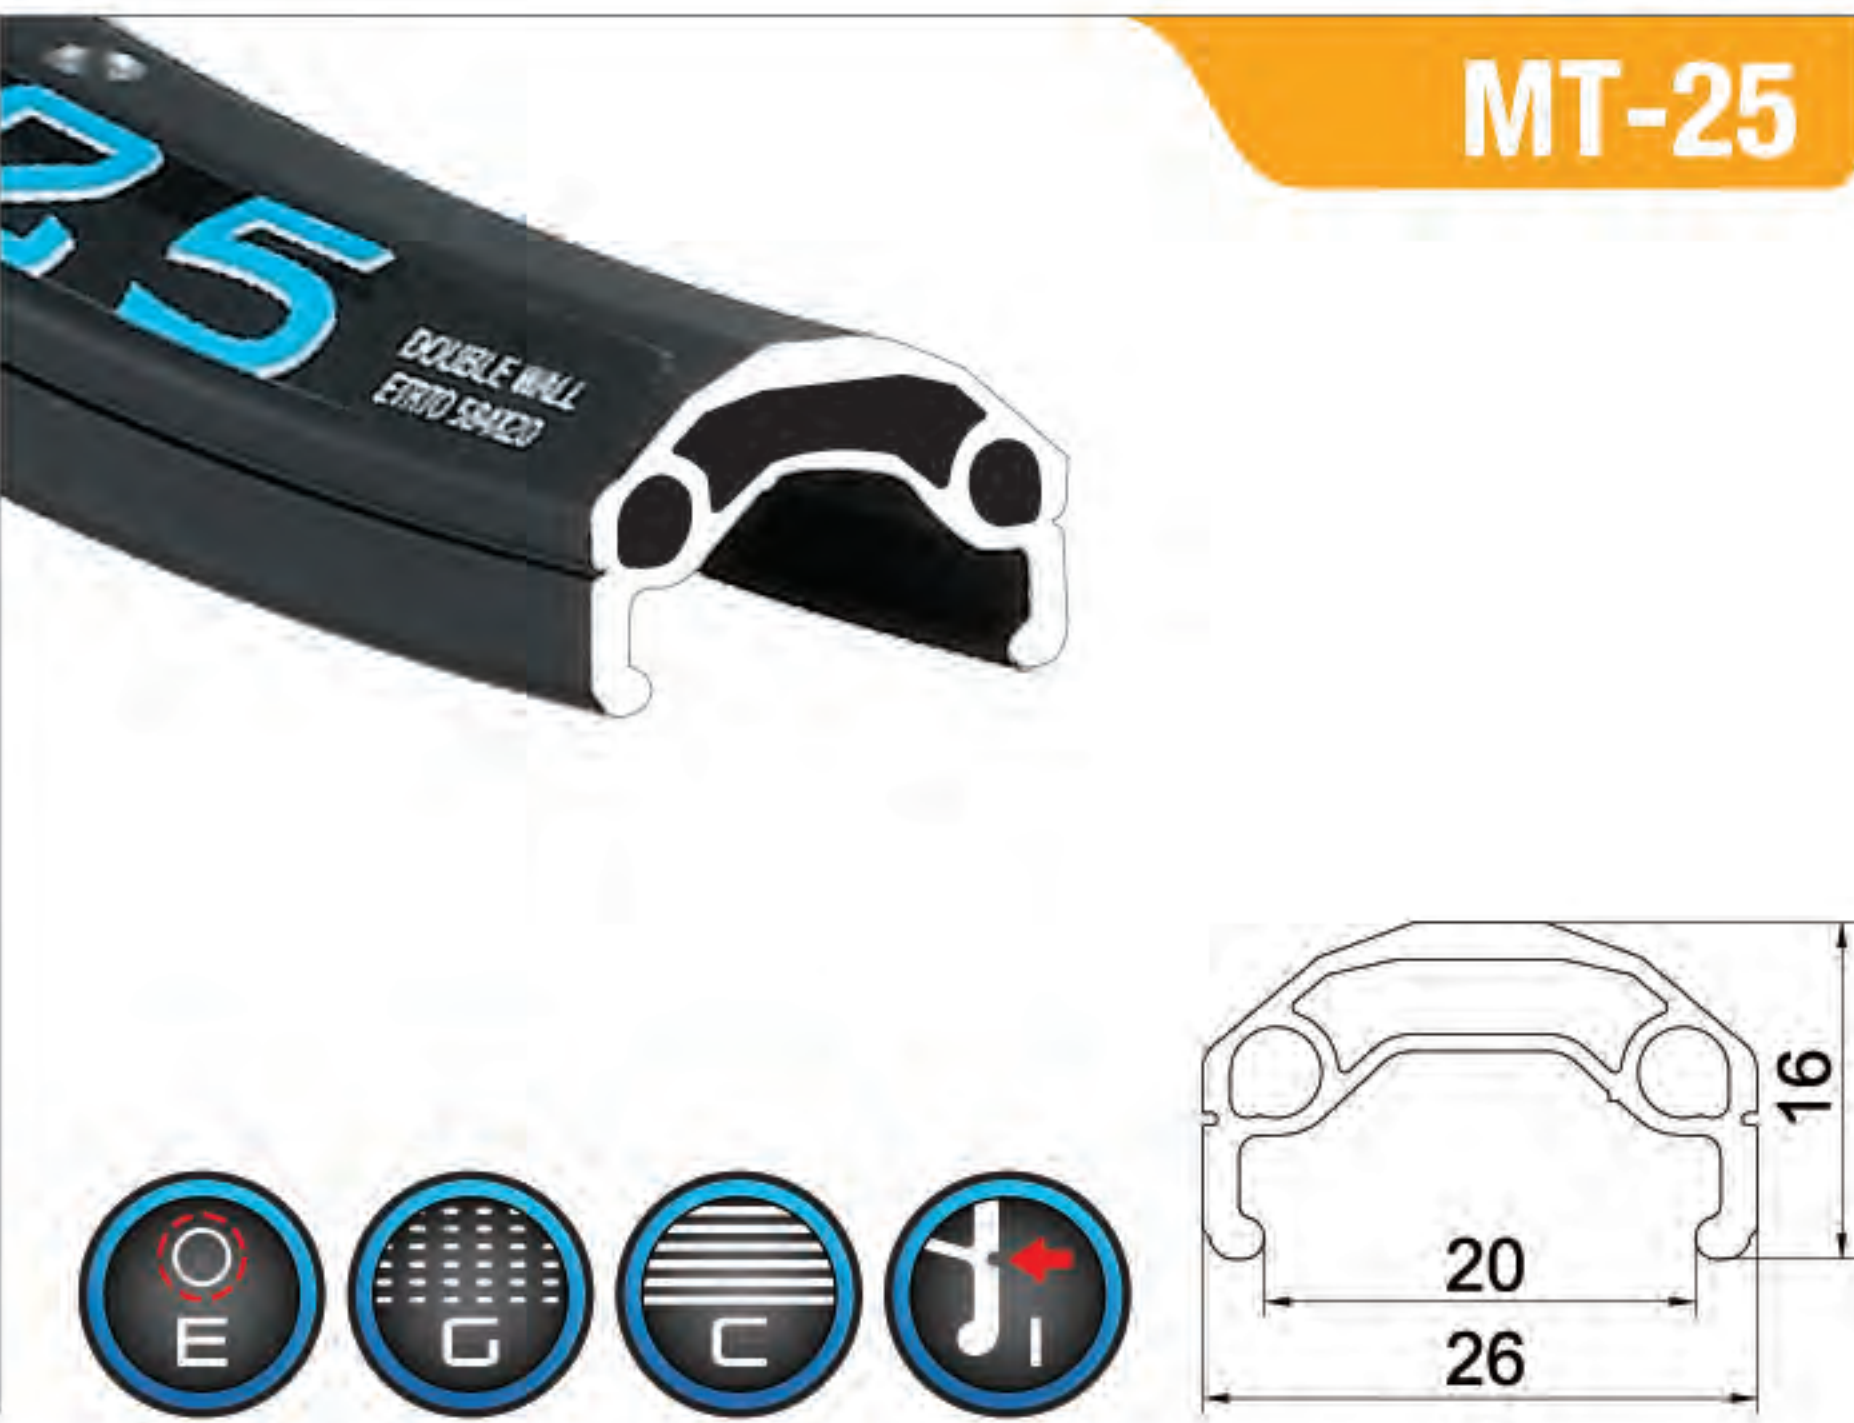


Size	Weight(g)	ERD(mm)
29"(622-20)	498	606
27.5"(584-20)	468	568

Holes: 32H/36H
Option: Eyelets/GSW/CSW
Joint: Pinned

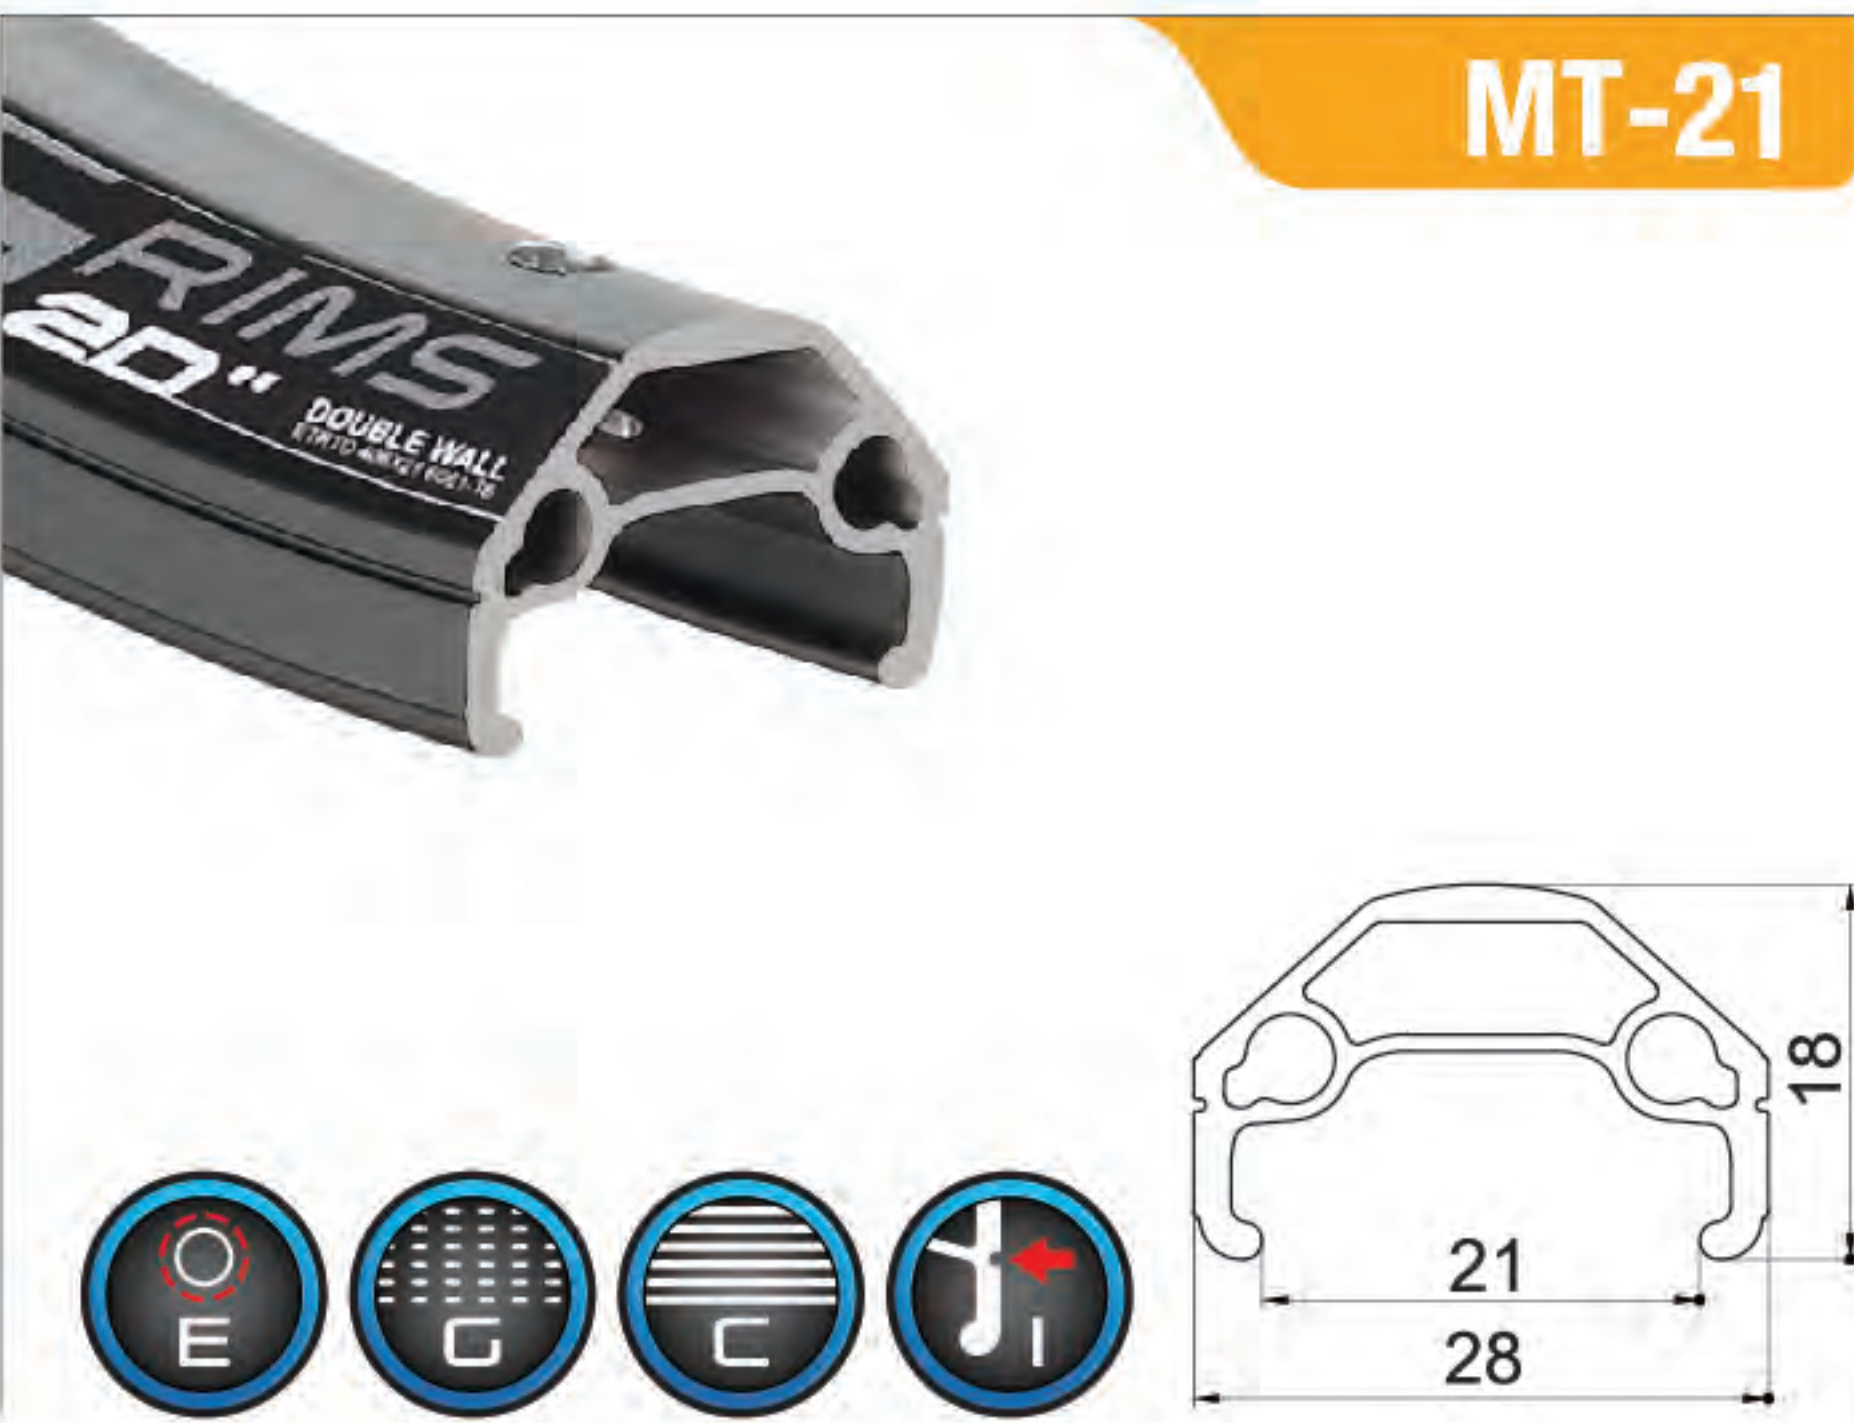

Size	Weight(g)	ERD(mm)
26"(559-21)	482	540
24"(507-21)	438	488
20"x1 3/8(451-21)	390	432
20"(406-21)	354	387

Holes: 28H/32H/36H
Option: Eyelets/GSW/CSW
Joint: Pinned

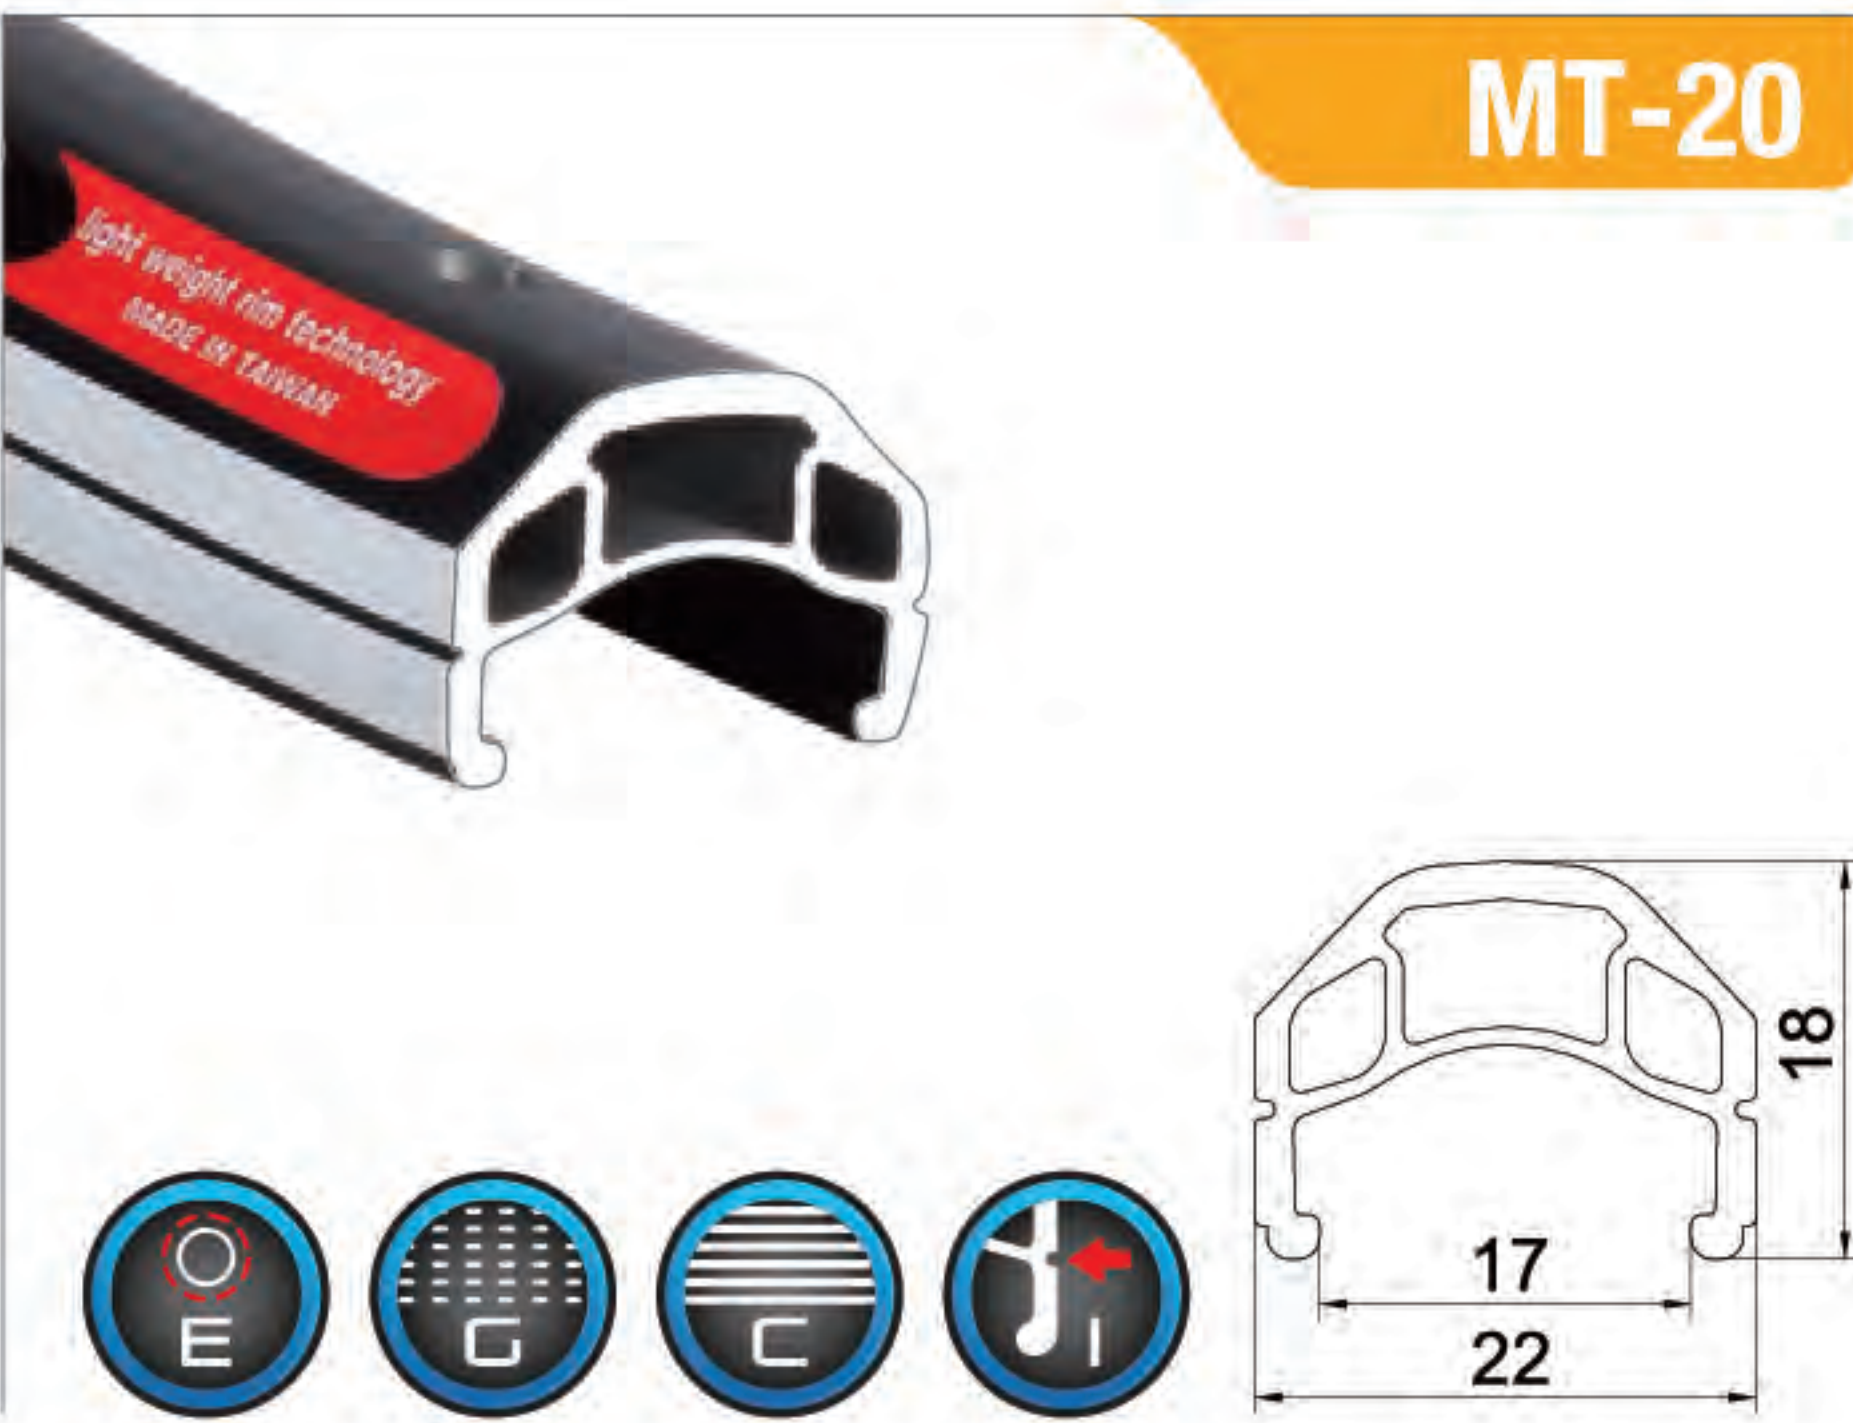

Size	Weight(g)	ERD(mm)
700C(622-17)	520	602
27.5"(584-17)	490	564
26"(559-17)	465	540
24"(507-17)	425	488
20"(406-17)	340	386

Holes: 24H/28H/32H/36H
Option: Eyelets/GSW/CSW
Joint: Pinned



MT-18



Size	Weight(g)	ERD(mm)
700C(622-18)	508	602
27.5"(584-18)	478	564
26"(559-18)	457	539

Holes: 32H/36H
Option: GSW/CSW
Joint: Pinned



CT-46




Size	Weight(g)	ERD(mm)
28"(635-18)	494	616
29er/700C(622-18)	487	603
27.5"(584-18)	459	565
26"(559-18)	438	540
24"x1(520-18)	406	501
24"(507-18)	399	488
20"(406-18)	321	387

Holes: 20H/24H/28H/32H/36H
Option: Eyelets/GSW/CSW
Joint: Pinned

SINGLE WALL



MP-50

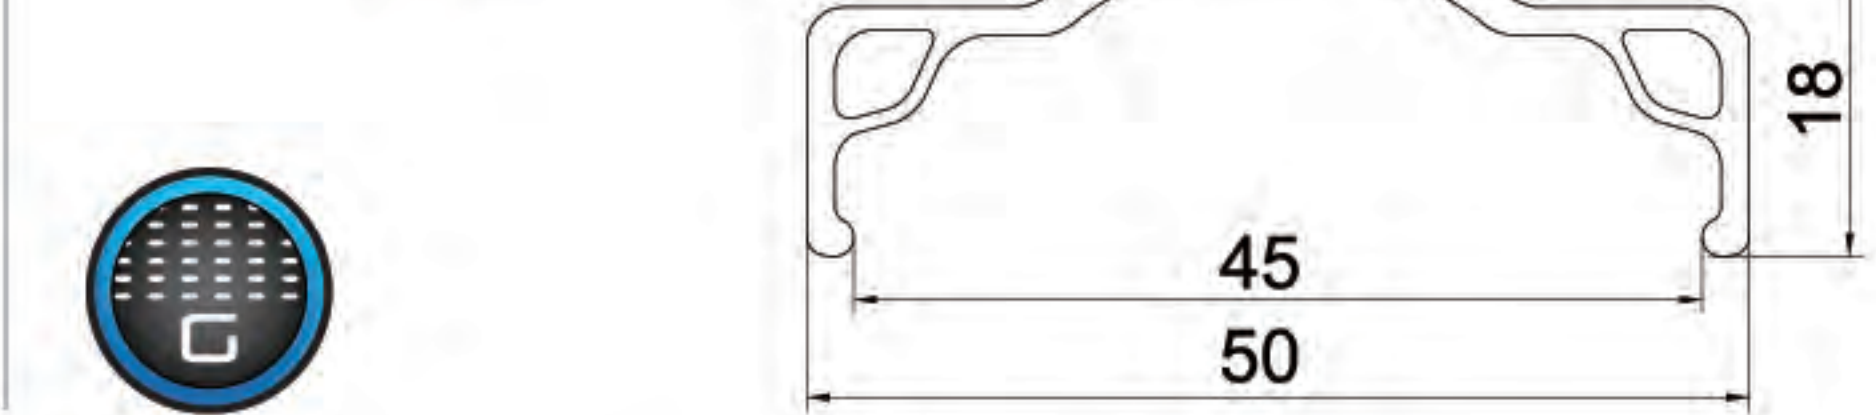

Size	
700C(622-45)	26"(559-45)
27.5"(584-45)	24"(507-45)

Holes: 32H/36H
Option: GSW
Joint: Pinned



A-6N



Size	
26"(559-21)	18"(355-21)
24"(507-21)	16"(305-21)
22"(457-21)	14"(254-21)
20"(406-21)	12"(203-21)

Holes: 20H/24H/28H/36H
Option: GSW
Joint: Pinned



MP-32



Size	
26"(559-26)	24"(507-26)

Holes: 32H/36H
Option: GSW
Joint: Pinned



A-5N




Size	
26"x1 3/8(590-21)	18"(355-21)
26"(559-21)	16"(305-21)
24"(507-21)	14"(254-21)
22"(457-21)	12"(203-21)
20"(406-21)	

Holes: 20H/24H/28H/36H
Option: GSW
Joint: Pinned



MP-22

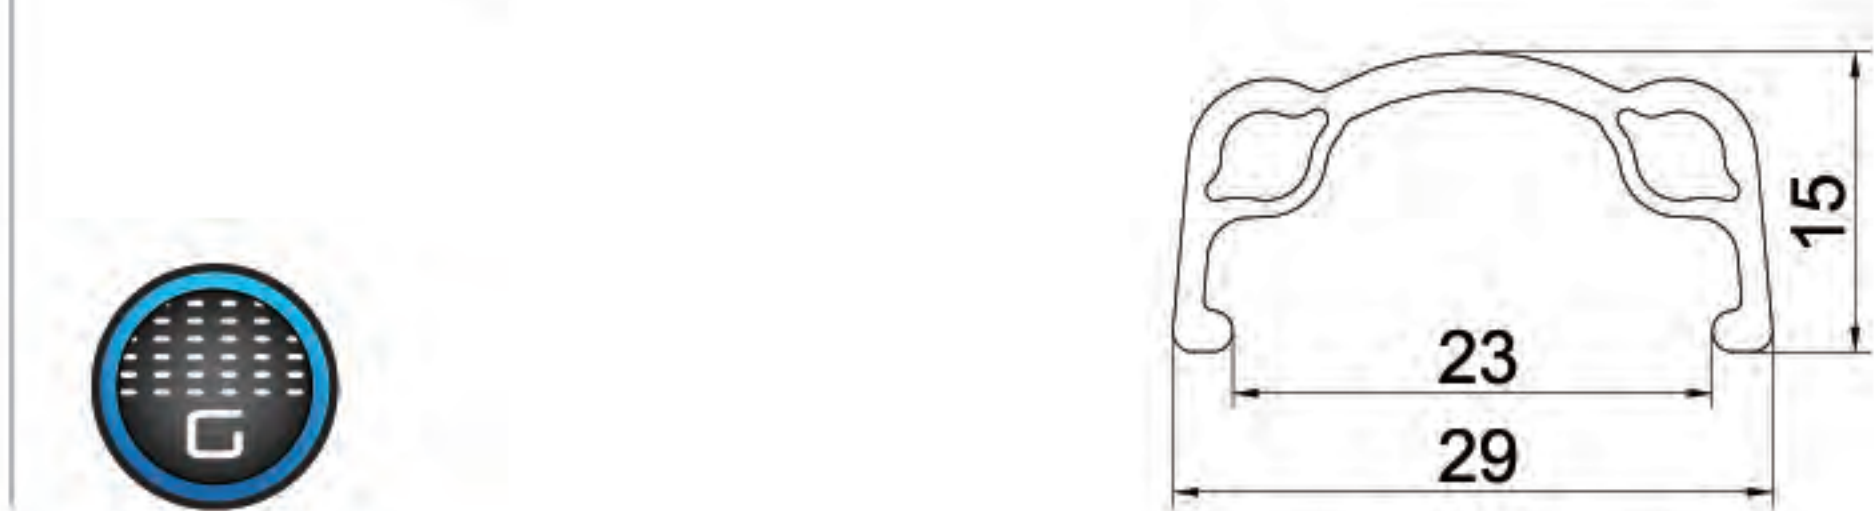

Size	
26"(559-23)	24"(507-23)

Holes: 32H/36H
Option: GSW
Joint: Pinned



A-8V



Size	
700C(622-16)	24"(507-16)
26"(559-16)	20"(406-16)

Holes: 20H/24H/28H/32H/36H
Option: GSW
Joint: Pinned



A-7N




Size	
700C(622-20)	26"(559-20)

Holes: 32H/36H
Option: GSW
Joint: Pinned




A-7X

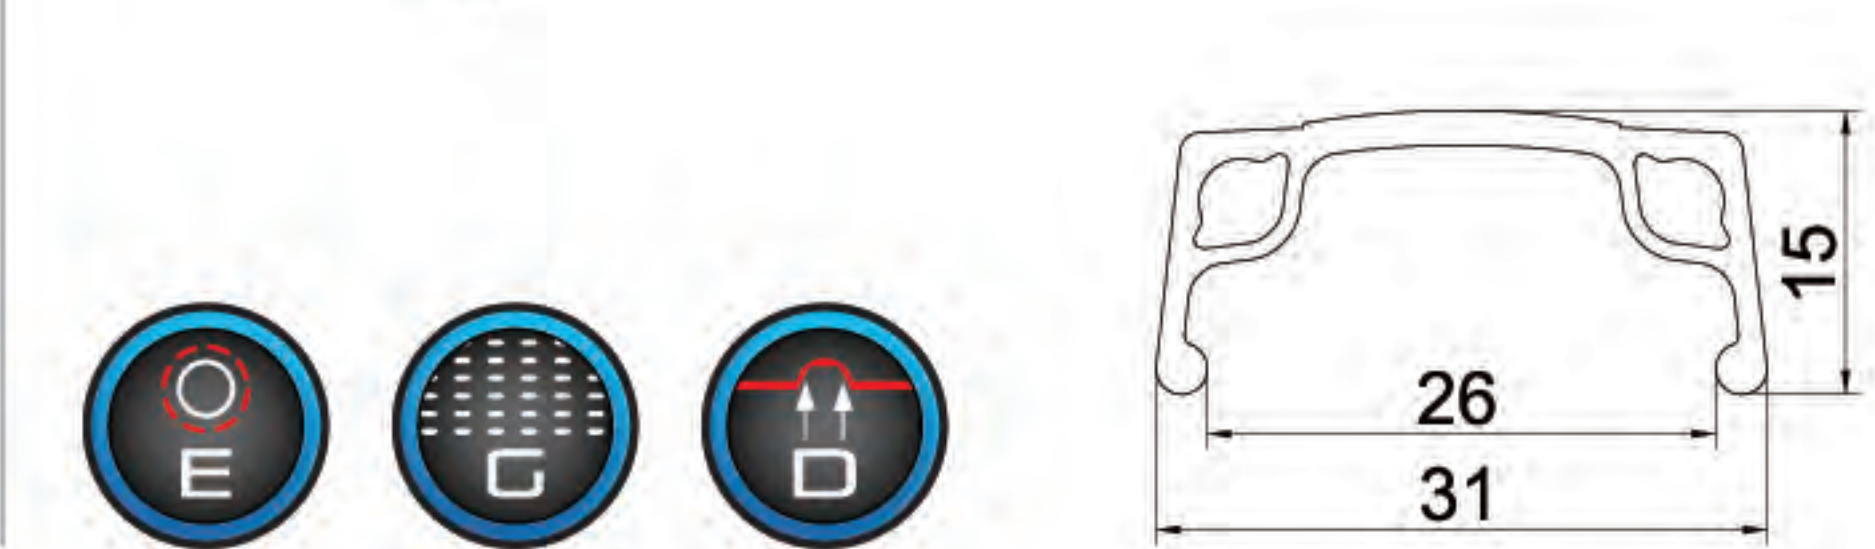

Size	
26"(559-26)	20"(406-26)
24"(507-26)	18"(355-26)
22"(457-26)	16"(305-26)

Holes: 20H/24H/28H/32H/36H/48H
Option: Eyelets/GSW/Dimple
Joint: Pinned

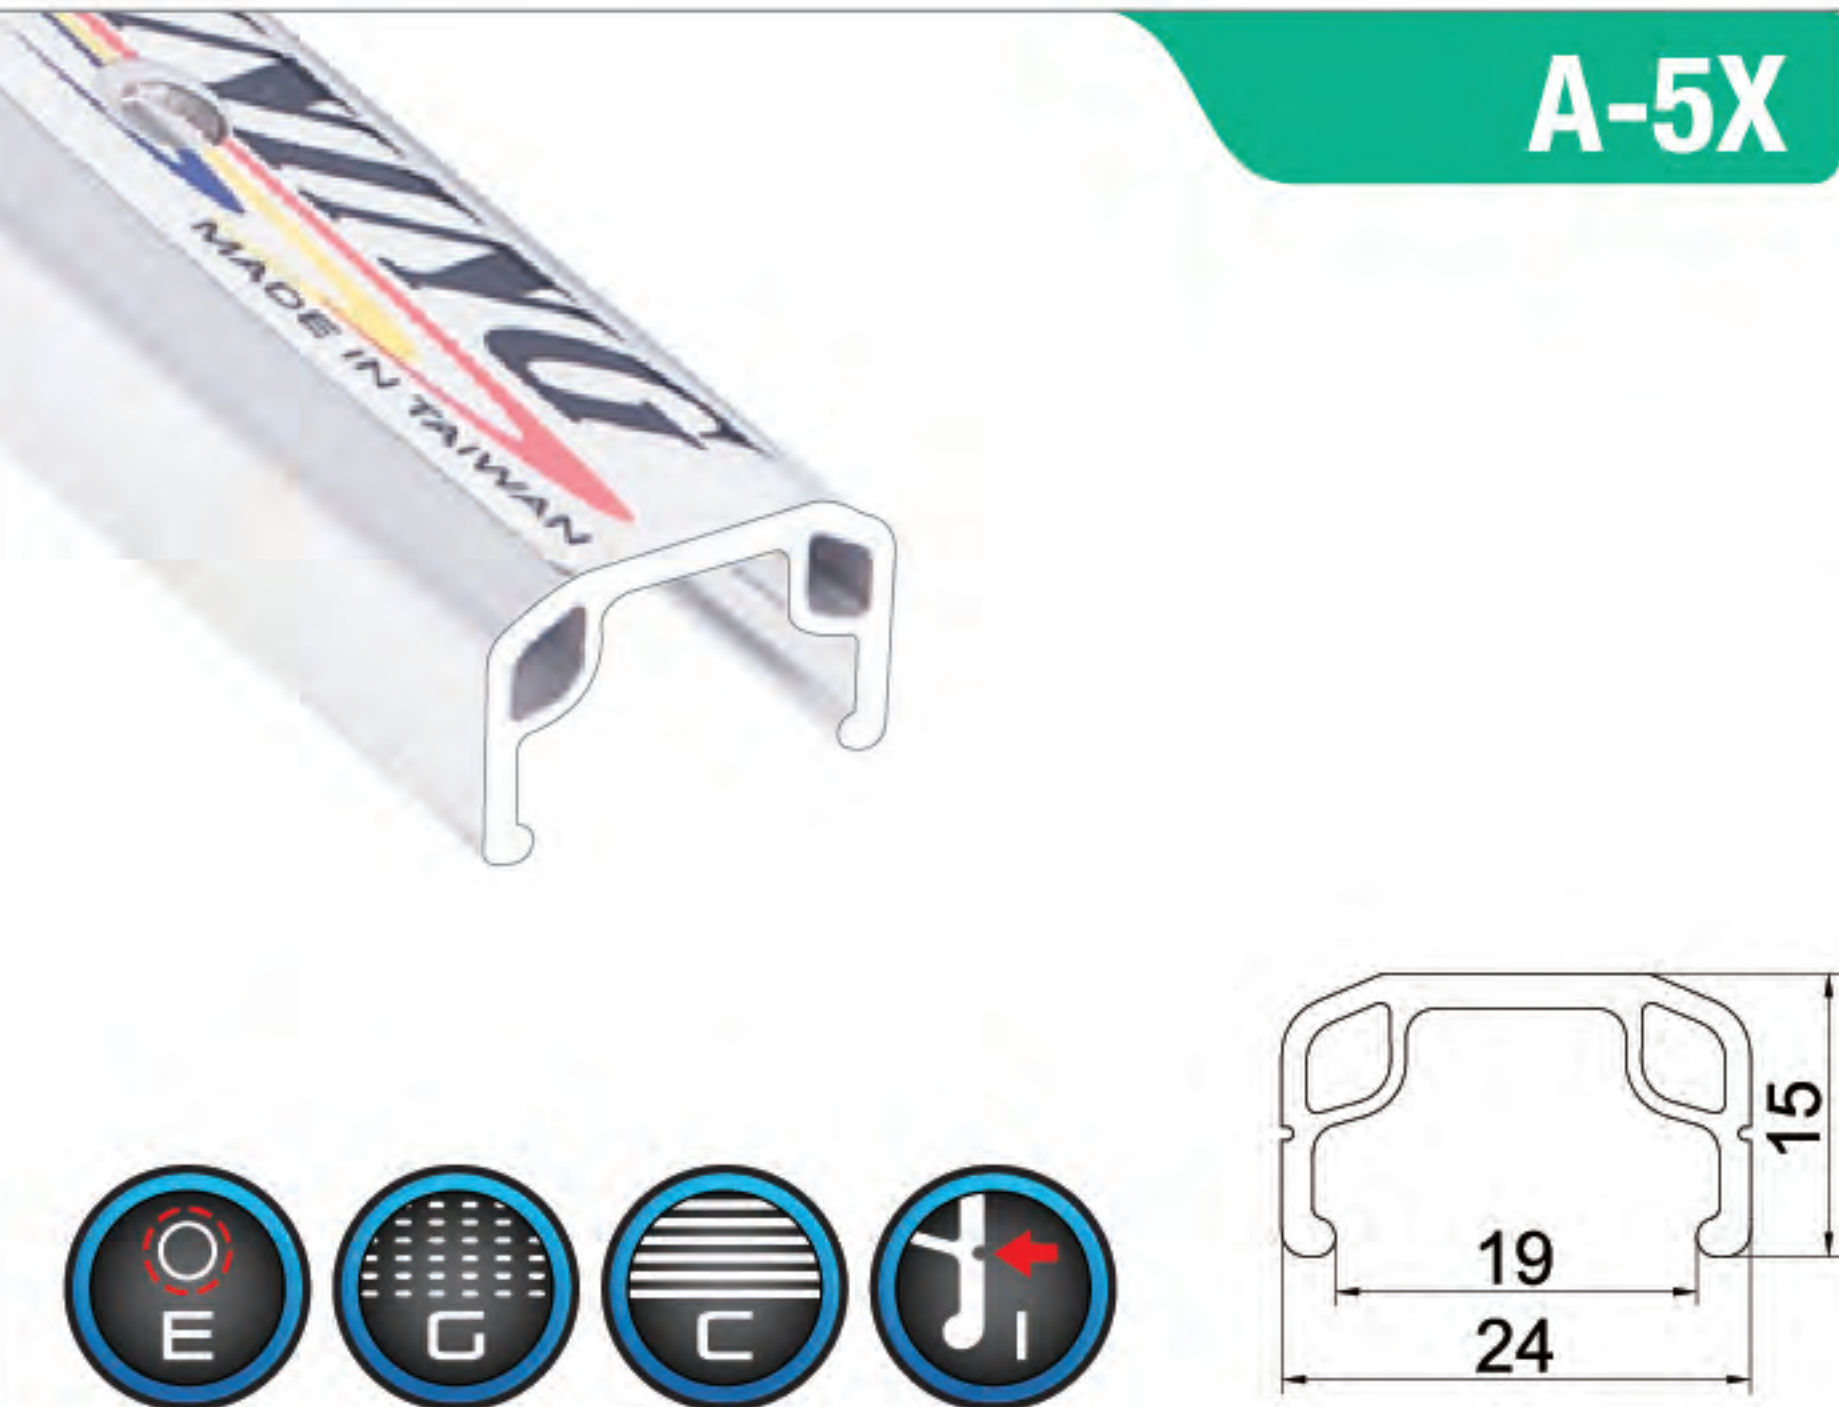

Size	
700C(622-19)	20"(406-19)
26"(559-19)	18"(355-19)
24"(507-19)	16"(305-19)

Holes: 20H/24H/28H/32H/36H
Option: Eyelets/GSW/CSW
Joint: Pinned



Size	
27"x1 1/4(630-19)	20"x1 3/8(451-19)
26"x1 3/8(590-19)	18"x1 3/8(400-19)
24"x1 3/8(540-19)	12"(203-19)
22"x1 3/8(490-19)	

Holes: 20H/24H/28H/32H/36H
Option: Eyelets/GSW
Joint: Pinned



Size	
24"(507-35)	20"(406-35)

Holes: 32H/36H/48H
Option: Eyelets
Joint: Pinned



Size	
27"x1 1/4(630-15)	22"x1 3/8(490-15)
26"x1 3/8(590-15)	20"x1 3/8(451-15)
24"x1 3/8(540-15)	18"x1 3/8(400-15)

Holes: 20H/24H/28H/32H/36H
Option: Eyelets/GSW
Joint: Pinned



Size	
27"x1 1/4(630-20)	22"x1 3/8(490-20)
26"x1 3/8(590-20)	20"x1 3/8(451-20)
24"x1 3/8(540-20)	18"x1 3/8(400-20)


Holes: 20H/24H/28H/32H/36H
Option: GSW
Joint: Pinned



Size	
27"x1 1/4(630-15)	22"x1 3/8(490-15)
26"x1 3/8(590-15)	20"x1 3/8(451-15)
24"x1 3/8(540-15)	18"x1 3/8(400-15)

Holes: 20H/24H/28H/32H/36H
Option: Eyelets/GSW
Joint: Pinned

STEEL RIM

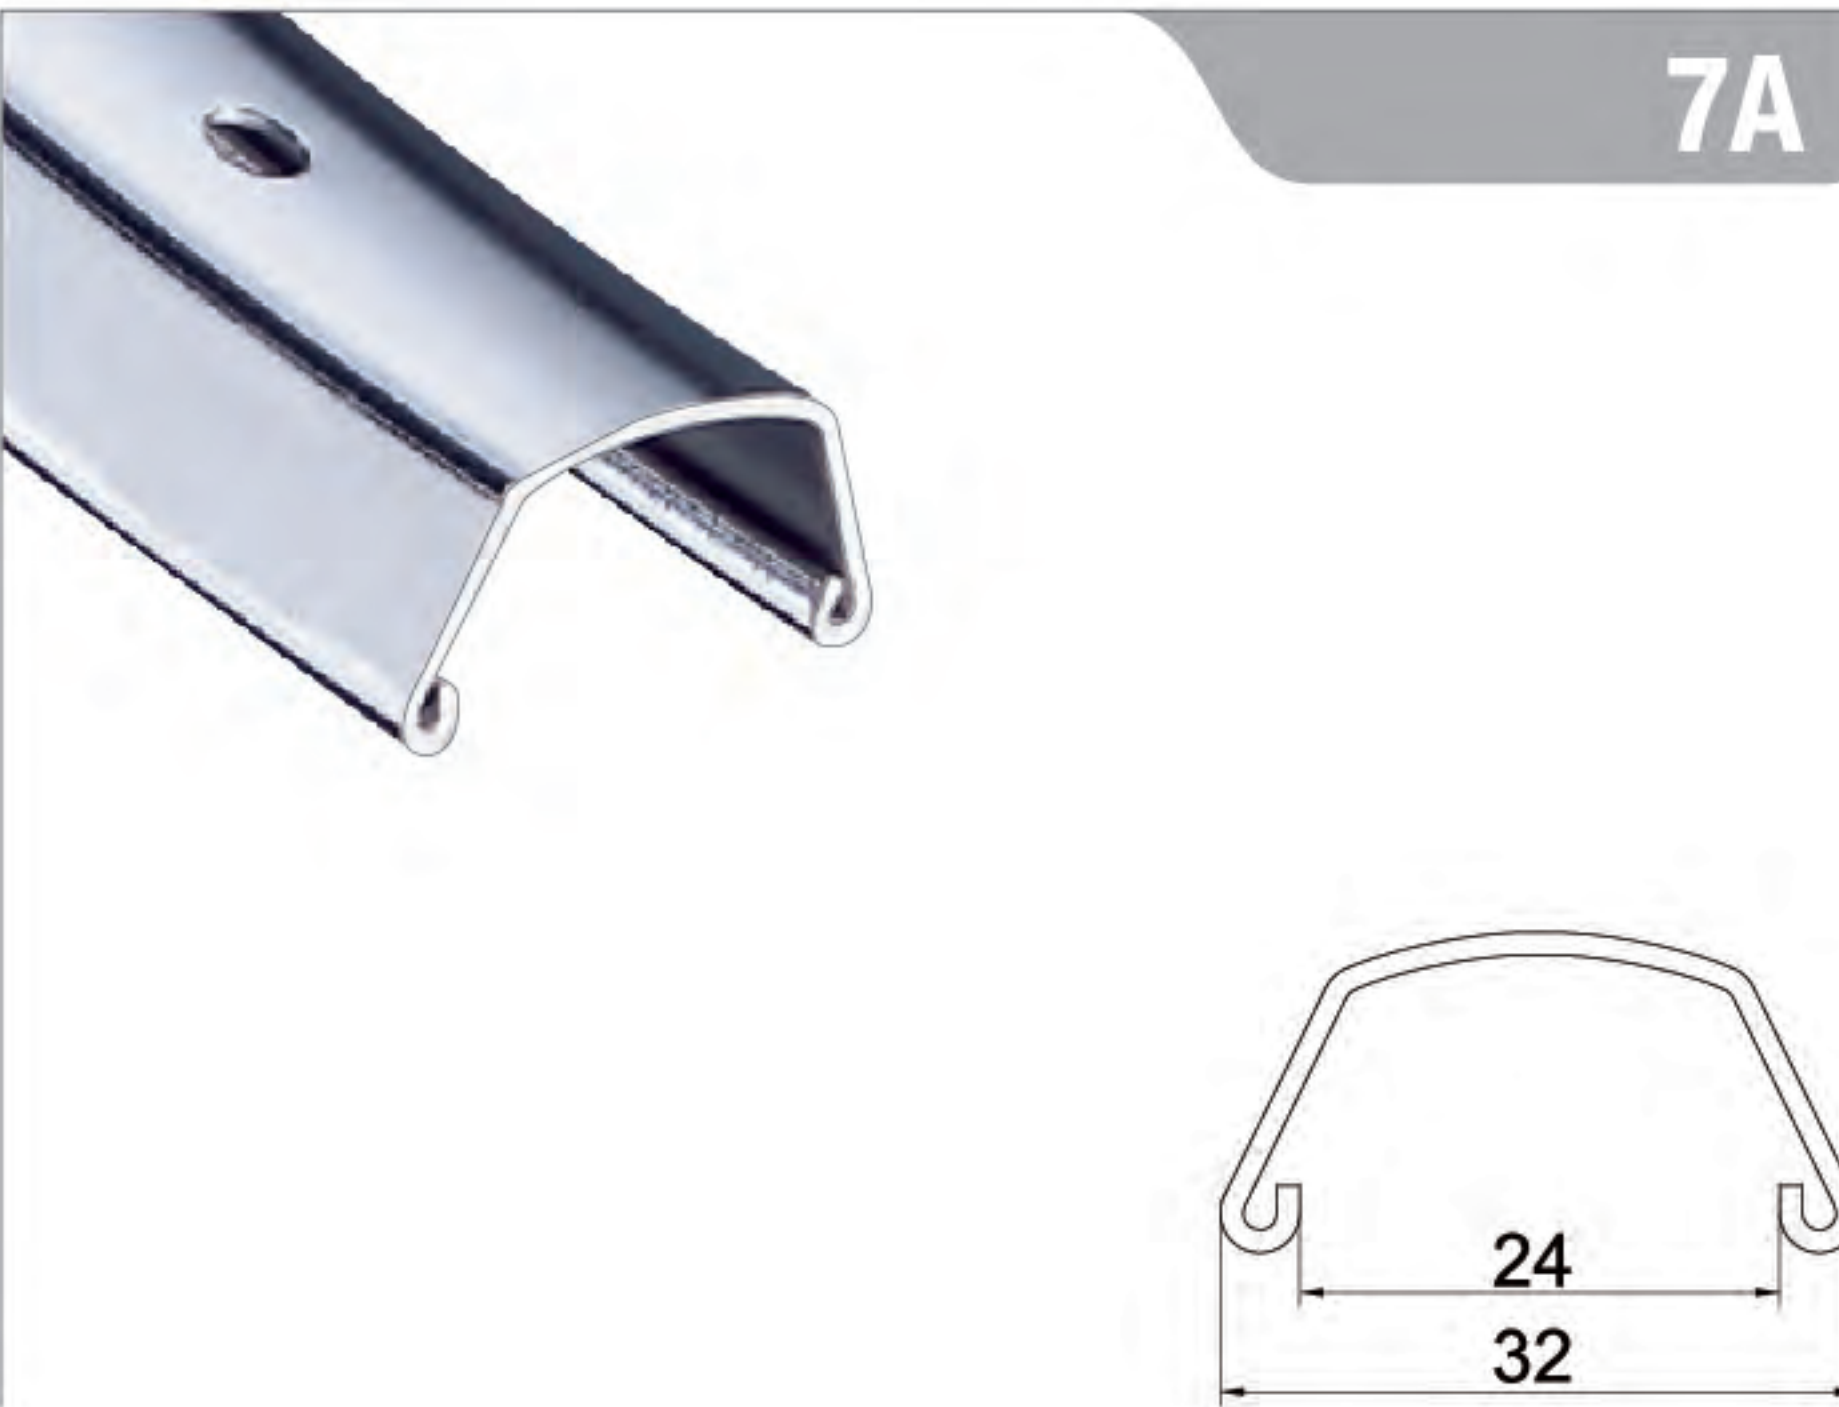

Size	
26"x1.75-2.125	16"x1.75-2.125
24"x1.75-2.125	14"x1.75-2.125
20"x1.75-2.125	12"x1.75-2.125
18"x1.75-2.125	

Holes: 16H/20H/28H/32H/36H
Finish: BK/CP/ED or Painted Colors
Gauges: 12G/14G



Size	
28"x1.75-2.125	20"x1.75-2.125
26"x1.75-2.125	18"x1.75-2.125
24"x1.75-2.125	16"x1.75-2.125

Holes: 16H/20H/28H/32H/36H
Finish: BK/CP/ED or Painted Colors
Option: Dimpled or Non-dimpled Holes
Gauges: 12G/14G

SPOKES and NIPPLES



SPOKES	
Material	Steel
Color	UCP/ED Black/CP
Type	Standard
Gauge	9G/10G/11G/14G

NIPPLES	
Material	Steel/Brass
Color	UCP/CP
Type	Standard

MOTORCYCLE RIM




STEEL RIM




Size			
14"x1.2	17"x1.4	14"x1.6	17"x1.85
16"x1.2	18"x1.4	16"x1.6	18"x1.85
17"x1.2	19"x1.4	17"x1.6	19"x1.85
19"x1.2	21"x1.4	18"x1.6	
		19"x1.6	
		21"x1.6	

Finish: CP

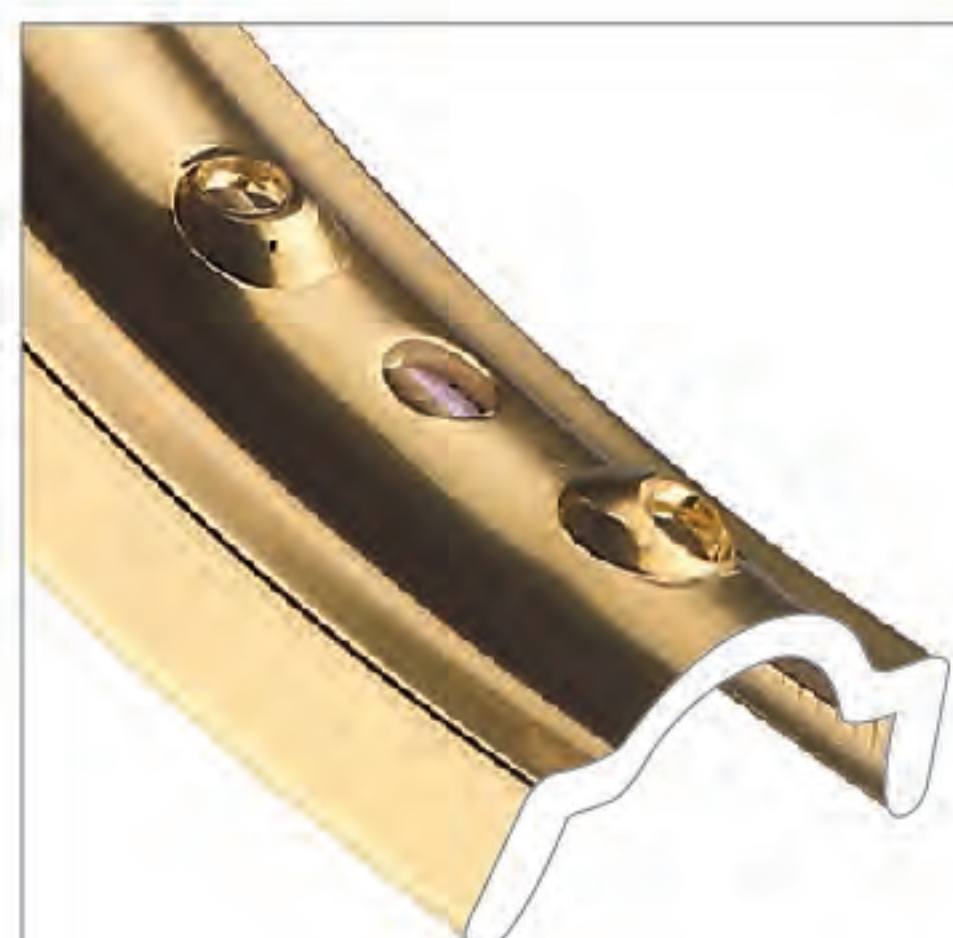

WM ALLOY RIM

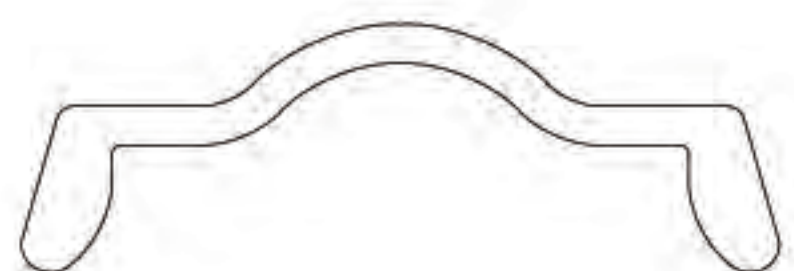


Size							
16"x1.2	10"x1.4	14"x1.5	10"x1.6	14"x1.85	12"x2.15	12"x2.5	14"x3.0
17"x1.2	12"x1.4	16"x1.5	12"x1.6	16"x1.85	14"x2.15	14"x2.5	16"x3.0
	14"x1.4	17"x1.5	14"x1.6	17"x1.85	16"x2.15	16"x2.5	17"x3.0
	16"x1.4	19"x1.5	16"x1.6	18"x1.85	17"x2.15	17"x2.5	18"x3.0
	17"x1.4		17"x1.6	19"x1.85	18"x2.15	18"x2.5	
	18"x1.4		18"x1.6	21"x1.85	19"x2.15	19"x2.5	
	19"x1.4		19"x1.6		21"x2.15	21"x2.5	
	21"x1.4		21"x1.6				

Finish: Silver/Gold/Black/Dark Blue/Red/Green/Light Blue Anodized/High Polish/Sand-Blasting



YL ALLOY RIM

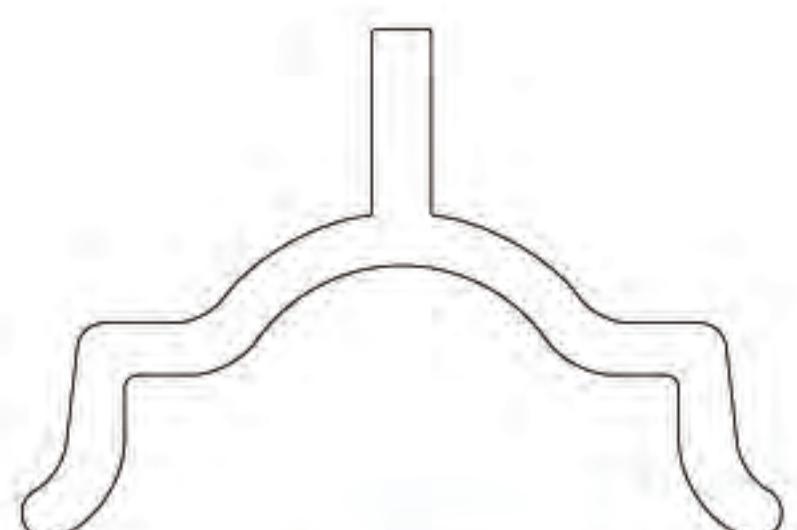


Size	
17"x1.6	19"x1.6
18"x1.6	21"x1.6

Finish: Silver/Gold/Black/Dark Blue/Red/Green
Light Blue Anodized/High Polish/Sand-Blasting



TL ALLOY RIM

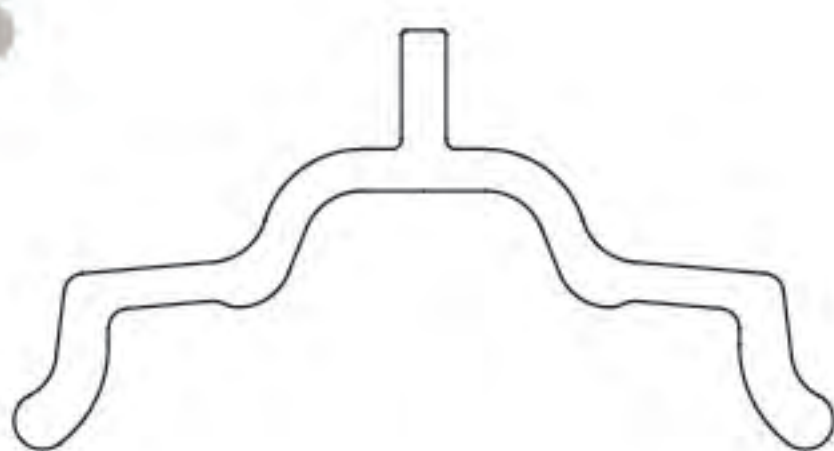

Size		
17"x2.50	18"x2.50	19"x2.50

Finish: Silver/Gold/Black/Dark Blue/Red/Green
Light Blue Anodized/High Polish/Sand-Blasting



H ALLOY RIM



Size				
14"x1.6	16"x1.85	17"x2.15	17"x2.5	17"x3.0
16"x1.6	17"x1.85	18"x2.15	18"x2.5	18"x3.0
17"x1.6	18"x1.85	19"x2.15	19"x2.5	
19"x1.6	19"x1.85	21"x2.15	21"x2.5	
	21"x1.85			

Finish: Silver/Gold/Black/Dark Blue/Red/Green/Light Blue Anodized/High Polish/Sand-Blasting



MT ALLOY RIM



Size					
16"xMT2.15	16"xMT2.5	16"xMT3.0	14"xMT3.5	17"xMT4.25	17"xMT5.0
17"xMT2.15	17"xMT2.5	17"xMT3.0	16"xMT3.5	18"xMT4.25	18"xMT5.0
18"xMT2.15	18"xMT2.5	18"xMT3.0	17"xMT3.5		
19"xMT2.15	19"xMT2.5		18"xMT3.5		
21"xMT2.15	21"xMT2.5				

Finish: Silver/Gold/Black/Dark Blue/Red/Green/Light Blue Anodized/High Polish/Sand-Blasting